SAMSUNG

PROJECTION TV RECEIVER

Chassis : J54A(P) C2.0
Model: SP43T7HFM//XST
SP62T8HCX/HAC
SP54T8HFX/BWT

SERVICE Manual

PROJECTION TV RECEIVER

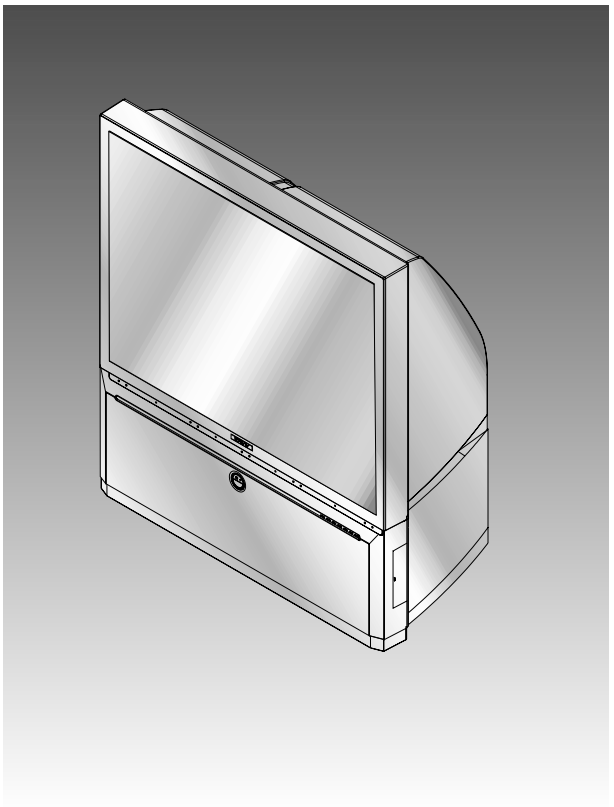

CONTENTS

1. Alignment and Adjustments
2. Exploded View and Parts List
3. Electric Parts List
4. PCB Diagrams
5. Schematic Diagrams

ELECTRONICS

© Samsung Electronics Co., Ltd. **May. 2003**
Printed in Korea
AA82-00600A

1. Alignment and Adjustments

1-1 When entering the service mode;

1. Turn on the TV, and then select “DYNAMIC” on the picture adjustment mode.
2. Turn off the TV(STAND-BY).
3. Enter the service mode by pressing the remote control keys in the following sequence:
   Display -> Menu -> Mute -> Power ON

Note : If necessary, re-do steps 1~3.

Initial display when the service mode is switched.

1-1-1 WHEN A RF SIGNAL IS RECEIVED

MODEL((T_CM2P06_002)

DEFLECTION
VIDEO ADJUST 1
VIDEO ADJUST 2
VIDEO ADJUST 3
VIDEO ADJUST 4
OPTION (87h 05ch)
YC DELAY
RESET
T_CM2906_002 yy.mm.dd

MODEL(T_CMDEAC_XXX)

DEFLECTION
VIDEO ADJUST 1
VIDEO ADJUST 2
VIDEO ADJUST 3
VIDEO ADJUST 4
OPTION (EF 8E 2E)
YC DELAY
RESET
T_CMDEAC_XXX yy.mm.dd

1-1-2 SERVICE MODE CONTROL KEYS

MAIN MENU	MENU DISPLAY
UP / DOWN	Select item by moving cursor
RIGHT / LEFT	Decrease or increase the adjustment values



[Navigation Key]

✍ **PRECAUTIONS**

1. When EEPROM IC (IC902) is replaced, first connect the power cord and wait for about 4~5 seconds.
2. After replacing EEPROM IC (IC902), enter the Service mode. Next, enter the standard data or the previous EEPROM IC data before replacement. And then check and adjust any items related to Geometric, Picture, Option.

1-2 FACTORY MODE MENU

1-2-1 MODEL(T_CM2906_002)

1-2-1(A) DEFLECTION

Item	Range	Initial Data		Remark
		4:3	Wide	
V Amp	0 ~ 63	39	31	Variable
V Shift	0 ~ 63	31	31	FIX
H EW	0 ~ 63	44	31	Variable
H Shift	0 ~ 63	31	31	FIX
V Linearity	0 ~ 15	7		FIX
Upper Linearity	0 ~ 15	0		FIX
Lower Linearity	0 ~ 15	0		FIX
V SC	0 ~ 15	7		FIX
H Parabolra	0 ~ 63	25	31	FIX
Upper Corner	0 ~ 63	37	31	FIX
Lower Corner	0 ~ 63	33	31	FIX
H Trapezium	0 ~ 63	31		FIX
Bow	0 ~ 63	31		FIX
Angle	0 ~ 63	31		FIX
V Position	0 ~ 63	31		FIX
Up UCG	0 ~ 3	0		FIX
Lo UCG	0 ~ 3	0		FIX
CXA Left Blk	0 ~ 63	50		FIX
CXA Right Blk	0 ~ 63	25		FIX

1-2-1(B) VIDEO ADJUST1

Item	Range	Initial Data	Remark
R Cutoff	0 ~ 63	25	Variable
G Cutoff	0 ~ 63	25	FIX
B Cutoff	0 ~ 63	25	Variable
Color On/Off	0 ~ 1	1	Variable
CB Offset	0 ~ 63	31	Variable
CR Offset	0 ~ 63	31	Variable
R Drive	0 ~ 63	25	Variable
G Drive	0 ~ 63	25	FIX
B Drive	0 ~ 63	25	Variable
Sub Bright	0 ~ 63	15	Variable
Sub Contrast	0 ~ 15	8	Variable
Sub Color	0 ~ 23	3	FIX
Sut Tint	0 ~ 63	31	FIX
CTI Level	0 ~ 3	1	FIX
COL Axis	0 ~ 3	1	FIX
LTI Level	0 ~ 3	1	FIX
VSU	0 ~ 15	2	FIX
Melody Volume	0 ~ 20	7	FIX
LIT Mode	0 ~ 3	1	FIX
System	0 ~ 3	1	FIX

1-2-1(C) VIDEO ADJUST2

Item	Range	Initial Data	Remark
ABL Level	0 ~ 3	3	FIX
Gamma	0 ~ 3	1	FIX
DPIC Level	0 ~ 3	2	-
DC Trans	0 ~ 3	3	FIX
ABL TH	0 ~ 15	15	FIX
VM Level	0 ~ 3	1	-
VM Corint	0 ~ 15	0	FIX
VM f0	0 ~ 3	1	FIX
VM Limit	0 ~ 3	1	FIX
VM Delay	0 ~ 3	1	FIX
SHP CD	0 ~ 3	0	FIX
SHP f0	0 / 1	1	FIX
SHP f1 & P/O	-	11	FIX
AKB Time	0 ~ 63	13	FIX
BandPass 9407	-	24	-
HighPass 9407	-	40	-
S ABL	0 ~ 3	0	FIX
P ABL	0 ~ 15	15	FIX

1-2-1(D) VIDEO ADJUST3

Item	Range	Initial Data		Remark
		4:3	Wide	
H Comp	0 ~ 15	8	13	FIX
V Comp	0 ~ 15	5	12	
Pin Comp	0 ~ 7	0		
AFC Comp	0 ~ 7	0		
H-Sync Phase	0 / 1	0		
NR Off Value	0 ~ 9	6		
CG HAO	0 ~ 20	10		
CG VAO	0 ~ 20	15		
NR High Ref	0 ~127	40		
NR Low Ref	0 ~127	3		
NR High Value	0 ~255	17		
NR Low Value	0 ~255	51		
NR Hight Ref(S)	0 ~127	20		
NR Low Ref(s)	0 ~127	0		
NR High Value(S)	0 ~255	17		
NR Low Value(S)	0 ~255	51		
NR Read M/S	0/27	0 0		

1-2-1(E) VIDEO ADJUST4

Item	Range	Initial Data	Remark
SECAM Color Main	0 ~255	28	FIX
SECAM Color Pip	0 ~255	28	
Picture Limit	0 ~ 3	3	
OSD Contrast	0 ~ 15	10	
TTX Contrast	0 ~ 15	3	

1-2-1(F) OPTION

Item	Setting Data	Appliance		Remark
		CW	CS	
SYSTEM	CS/CW	CW	CS	Area Option
SOUND	A2-NICAM/Dolby-Prologic	Dolby Prlogic		-
ASPECT	WIDE / 4:3	-		Inch Option
WIDE 4:3	ON/OFF	-		Inch Option
X-RAY	ON/OFF	ON		-
AUTO FM	ON/OFF	ON		-
PIP	ON/OFF	ON		-
LNA	ON/OFF	ON		-
Letter Box	ON/OFF	ON		-
TTX Lang.Grp	West/East/CIS/Turk&Grk	-		Area Option
AGC	ON/OFF	OFF		-
Natural Zoom	ON/OFF	OFF		-

1-2-1(G) YC DELAY

Item	Range
P.YC(AV) Delay	1
S.YC(AV) Delay	-5
N.YC(AV) Delay	1
P.BG.YC Dealy	1
P.DK.YC Delay	-2
P.I.YC Delay	0
P.M.YC Delay	0
P.N.YC Delay	0
S.BG.YC Delay	-7
S.DK.YC Delay	-9
S.I.YC Delay	-9
S.M.YC Delay	-7
S.L.YC Delay	-10
N.M.YC Delay	3
N4.43 YC Delay	-6

1-2-2 CS MODEL(T_CMDEAC_XXX)

1-2-2(A) DEFLECTION

Item	Range	Initial Data												Remark
		42W5		47W1		43T6/43T7		48T6		54T6		62T6		
		NTSC	PAL	NTSC	PAL	NTSC	PAL	NTSC	PAL	NTSC	PAL	NTSC	PAL	
V Amp	0 ~ 63	48	48	48	48	48	48	48	48	48	48	48	48	Variable
V Shift	0 ~ 63	31	31	31	31	31	31	31	31	31	31	31	31	FIX
H EW	0 ~ 63	48	48	48	48	48	48	48	48	48	48	48	48	Variable
H Shift	0 ~ 63	24	24	24	24	24	24	24	24	24	24	24	24	FIX
V Linearity	0 ~ 15	7		7		7		7		7		7		FIX
Upper Linearity	0 ~ 15	0		0		0		0		0		0		FIX
Lower Linearity	0 ~ 15	0		0		0		0		0		0		FIX
V SC	0 ~ 15	2		2		2		2		2		2		FIX
H Parabolra	0 ~ 63	15		15		15		15		15		15		FIX
Upper Corner	0 ~ 63	33		33		33		33		33		33		FIX
Lower Corner	0 ~ 63	33		33		33		33		33		33		FIX
H Trapezium	0 ~ 63	18		18		18		18		18		18		FIX
Bow	0 ~ 63	31		31		31		31		31		31		FIX
Angle	0 ~ 63	31		31		31		31		31		31		FIX
V Position	0 ~ 63	31		31		31		31		31		31		FIX
Up UCG	0 ~ 3	0		0		0		0		0		0		FIX
Lo UCG	0 ~ 3	0		0		0		0		0		0		FIX
CXA Left Blk	0 ~ 63	50		50		50		50		50		50		FIX
CXA Right Blk	0 ~ 63	25		25		25		25		25		25		FIX

1-2-2(B) VIDEO ADJUST1

Item	Range	Initial Data	Remark
R Cutoff	0 ~ 63	20	Variable
G Cutoff	0 ~ 63	20	Variable
B Cutoff	0 ~ 63	20	Variable
Color On/Off	0 ~ 1	1	FIX
CB Offset	0 ~ 63	31	Variable
CR Offset	0 ~ 63	31	Variable
R Drive	0 ~ 63	31	Variable
G Drive	0 ~ 63	31	Variable
B Drive	0 ~ 63	31	Variable
Sub Bright	0 ~ 63	20	Variable
Sub Contrast	0 ~ 15	8	Variable
Sub Color	0 ~ 23	15	FIX
Sut Tint	0 ~ 63	31	FIX
CTI Level	0 ~ 3	1	FIX
COL Axis	0 ~ 3	2	FIX
LTI Level	0 ~ 3	1	FIX
VSU	0 ~ 15	2	FIX
Melody Volume	0 ~ 20	4	FIX
LIT Mode	0 ~ 3	1	FIX
System	0 ~ 3	1	FIX

1-2-2(C) VIDEO ADJUST2

Item	Range	Initial Data	Remark
ABL Level	0 ~ 3	3	FIX
Gamma	0 ~ 3	1	FIX
DPIC Level	0 ~ 3	3	FIX
DC Trans	0 ~ 3	2	FIX
ABL TH	0 ~ 15	15	FIX
VM Level	0 ~ 3	2	FIX
VM Coring	0 ~ 15	0	FIX
VM f0	0 ~ 3	1	FIX
VM Limit	0 ~ 3	1	FIX
VM Delay	0 ~ 3	1	FIX
SHP CD	0 ~ 3	0	FIX
SHP f0	0 / 1	1	FIX
SHP f1 & P/O	-	11	FIX
AKB Time	0 ~ 63	13	FIX
BandPass 9407	-	24	FIX
HighPass 9407	-	40	FIX
S ABL	0 ~ 3	0	FIX
P ABL	0 ~ 15	15	FIX

1-2-2(D) VIDEO ADJUST3

Item	Range	Initial Data	Remark
H Comp	0 ~ 15	2	FIX
V Comp	0 ~ 15	4	
Pin Comp	0 ~ 7	3	
AFC Comp	0 ~ 7	0	
H-Sync Phase	0 / 1	0	
NR Off Value	-	6	
CG HAO	0 ~ 20	10	
CG VAO	0 ~ 20	15	
NR High Ref	0 ~127	40	
NR Low Ref	0 ~127	3	
NR High Value	-	17	
NR Low Value	-	51	
NR Hight Ref(S)	0 ~127	20	
NR Low Ref(s)	0 ~127	0	
NR High Value(S)	-	17	
NR Low Value(S)	-	51	
NR Read M/S	-	0 0	

1-2-2(E) VIDEO ADJUST4

Item	Range	Initial Data	Remark
SECAM Color Main	0 ~255	28	FIX
SECAM Color Pip	0 ~255	28	
Picture Limit	0 ~ 3	3	
OSD Contrast	0 ~ 15	10	
TTX Contrast	0 ~ 15	3	

1-2-2(F) OPTION

Item	Setting Data	Appliance (Southeast Asia)	Appliance (CHINA)	Appliance (Middle East)
LANGUAGE	ENG+THAI / ENG+CHINA ENG+MIDDLE / ONLY ENG	ONLY ENG ENG+THAI(Thailand)	ENG+CHINA	ENG+MIDDLE
SOUNG	A2-NICAM/Virtual Dolby /Dolby Prologic	Dolby Prologic	Dolby Prologic	Dolby Prologic
CRT	WIDE / 4:3	4:3(Option)	4:3(Option)	4:3(Option)
CHANNEL	100-channel / 200-channel /250-chanel	100-channel	200-channle	250-channle
X-LAY	OFF / ON	ON	ON	ON
TTX	OFF / ON	ON	OFF	ON
AUTO FM	OFF / ON	ON	ON	ON
PIP	OFF / 2-TUNER	2-TUNER	2-TUNER	2-TUNER
MULTI PIP	OFF / ON	ON	ON	ON
LNA	OFF / ON	ON	ON	ON
HIGH DEV	OFF / ON	OFF	OFF	OFF
SCART	RCA+1SCART+DVD / RCA+DVD	RCA+1SCART+DVD	RCA+DVD	RCA+1SCART+DVD
LETTER BOX	OFF / ON	ON	ON	ON
DW PIP	OFF / ON	ON	ON	ON
LIST PRIOR	OFF / ON	OFF 0N(AUSTRALIA)	OFF	OFF
TTX LANG	WEST EUROPE / EAST EUROPE RUSSIAN / GREEK-TURKEY ARABIC / FARSI / AREB-HEBREW	WEST EUROPE	WEST EUROPE	ARABIC
AGC	OFF / ON	OFF/0N(Thailand)	OFF	OFF
AV MEMORY	OFF / ON	OFF	OFF	OFF
AUSTRALIA	OFF / ON	OFF	OFF	OFF
CG BRIGHT	OFF/ON	OFF	OFF	OFF

1-2-2(G) YC DELAY

Item	Range
P.YC(AV) Delay	1
S.YC(AV) Delay	-5
N.YC(AV) Delay	1
P.BG.YC Dealy	1
P.DK.YC Delay	-2
P.I.YC Delay	-2
P.M.YC Delay	0
P.N.YC Delay	0
S.BG.YC Delay	-7
S.DK.YC Delay	-10
S.I.YC Delay	-9
S.M.YC Delay	-7
S.L.YC Delay	-10
N.M.YC Delay	3
N.443.YC Delay	-1

1-3 Screen Change (When Adjusting I²C Bus Geometric Items)

1 V AMP



2 V SHIFT



3 H EW



4 H SHIFT



5 V LINEARITY



6 V - S - CORRECTION



7 H Parabolra



8 H Trapezium

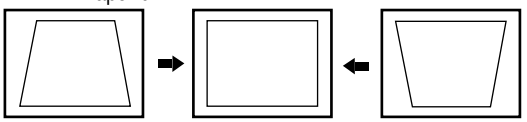

9 BOW



10 ANGLE

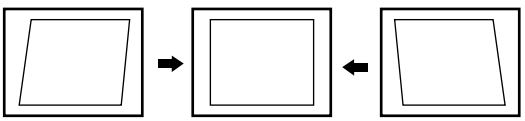

1-4 Other Adjustments

1-4-1 Screen Adjustment

1. Warm up the TV for at least 30 minutes.
2. Select the “DYNAMIC” Video mode.
3. Trun to the Video Mode(No Signal) using a remote-control.
4. Connect an oscilloscope to RK, GK, BK.
5. Adjust the VR (VR501, VR531, VR561) screen so that RK, GK, BK pulse is 20Vp-p each. (Turn the R,G,B VR screen fully counterclockwise in the area of each flyback line.)

1-4-2 White Balance Adjustment

1. Select the “DYNAMIC” video mode.
2. Input 100% white pattern.
3. In the stand-by mode, press the remote-control keys in the following sequence:
   Displsy → Menu → Mute → Power ON
4. Warm up the TV for at least 30 minutes.
5. Input a 10-step signal.
6. R-cut off, B-cut off, and G-cut off by pressing the Volume +/- keys.
7. Adjust the low light with viewing the dark side of the screen.
8. Select R-drive, G-drive and B-drive by pressing the Volume +/- keys.
9. Adjust the high light with viewing the light side of the screen.
10. If necessary, redo adjustments 6~9.
11. Press the Menu key to exit.

1-4-3 Sub-Brightness Adjustment

1. Input a sub-brightness adjustment signal. (TOSHIBA PATTERN)
2. In the stand-by mode, press the remote-control keys in the following sequence :
   Displsy → Menu → Mute → Power ON
3. Select Sub-Bright by pressing the Volume +/- keys.
4. Adjust so that the 63 step on the right side of the screen is not seen (Use the Volume +/- keys).
5. Press the Menu key to exit.

1-4-4 High Voltage (29KV) Check

PRECAUTION

1. Input a lion head pattern.
2. Select “DYNAMIC” video mode.
3. Warm up the TV for at least 10 minutes.
4. Use a 1000:1 probe.

ADJUSTMENT

1. Connect the (+) terminal of the 10000:1 probe to the high voltage distributor and the(-) terminal to GND(located on the deflection board).
2. Adjust RR471S (located on the deflection board) so that the digital meter indicates DC290V ± 0.1V.

4-4-5 F.S. (Fail Safe) Circuit Check

Note : The finished product has a well-mounted VR(RR402S).
If necessary, do the F.S adjustments in the following sequece.

1. Use a digital multimeter.
2. Connect the digital multimeter to the JIG pin (DZ482S) terminals.
3. Adjust VR(RR402S) so that the voltage becoms 2.25V.
4. After the adjustments are complete be sure to mount VR(RR402S) correctly.

1-4-6 Static Focus Adjustment

PRECAUTION

1. Select the “DYNAMIC” video mode.
2. Input a crosshatch pattern.
3. Cover the lenses that are not being adjusted.
4. Connect a convergence jig and read data.
5. Adjust the lens for best focus.
   (See Fig, 4-1)

STATIC FOCUS (CONTINUED)

Vary the focus pack VR (Red, Blue) on the front cabinet. Adjust the TV for best possible focus around the center of the crosshatch pattern, without losing overall screen balance.
Figure Crosshatch Pattern
Examine these points together.



Examine these points together
Fig. 4-1 Crosshatch Pattern.

1-4-7 Lens Focus Adjustment

PRECAUTIONS

1. Do this adjustment after the static focus adjustment and the tilt adjustment.
2. Select the “DYNAMIC” video mode.
   (Contrast:100, Brightness:50)
3. Input a crosshatch pattern.

ADJUSTMENT

1. Loosen the lens screws.
2. Cover the two lenses that are not being adjusted.
3. Adjust the lens, observing the color aberration vertically and horizontally within 3 blocks of the center of the crosshatch pattern.
4. When the lens is turned clockwise, the color aberration will change as follows:

Lens	Color Aberration Change
R	Orange - Crimson
G	Blue - Red
B	Purple - Green

5. Green lens adjustment:
   Set the lens at the point where Blue just changes to Red. If the color aberration is irregular throughout the picture screen, adjust the lens to show Red color aberration (approximately 1~3 mm area) within a 3-block grid around the horizontal center-line. If the color aberration is irregular, adjust the lens as shown in the diagram below. (Accurate alignment of Green is important for overall color quality.)
6. Red lens adjustment
   Set the Red lens at the point where Orange becomes Crimson.
7. Blue lens adjustment
   Set the Blue lens at the point where Purple becomes Green.



Fig. 4-2 Color Aberration

1-5 Beam alignment Adjustments

1. Select the “DYNAMIC” video mode.
2. Warm up the set at least for 10 minutes.
3. Enter the Convergence mode by pressing the remote control buttons in the following sequence :

   Mute → 1 → 8 → 3

4. Set the Beam Alignment Adjustment CY to Zero magnetic field area.

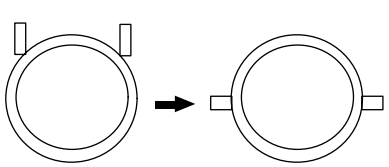

(Creation of CPM Zero Magnet)



(Creation of the 2-pole/4-pole zero magnets)

5. Check the squarewave at the point where the focus is misaligned.
6. Press the 7 button on the remote control during 3~5 sec and vibrating dot-pattern appears.
7. Adjust the Focus-pack VR for defocusing.
8. Mute the other patterns (R/B) other than G-PATTERN.
   (Use / TV buttons on the remote control.)

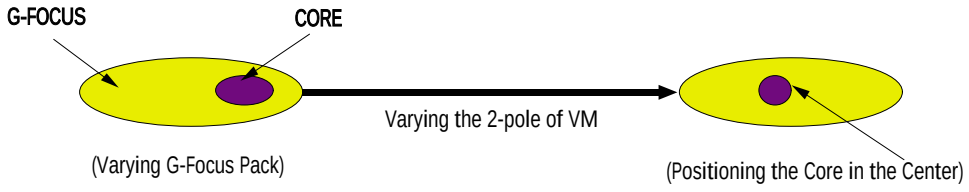

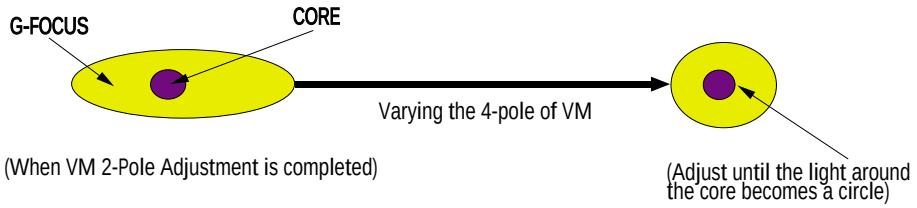
G-FOCUS
CORE
Varying the 4-pole of VM
(When VM 2-Pole Adjustment is completed)
(Adjust until the light around the core becomes a circle)

9. Adjust the 2, 4 polarities of VM-COIL as shown in figure below.
10. Adjust the G-Focus until any light around the core disappears.
11. Adjust G-Focus so that the surrounding flash can disappear from the spot.
12. After G-Focus adjustments are complete, adjust R-Focus as above procedures.
13. The B-CRT adjustments can be omitted because the variance of beam focus is small.
    (Only Vm-coil is mounted.)
14. Adjust the Focus-pack VR for fine focusing.
15. Press the 7 button on the remote control, and the mode changes to the Convergence Adjustment mode.
16. Press the S.STD button on the remote control to return to normal viewing.

1-6 High Voltage Part

1-6-1 PWM REG Circuit

For the existing high voltage REG circuit (input voltage variation type), a dynamic REG response is not provided. So it is difficult for both beam linearity and uniformity in screen size to be maintained on the screen with rapidly changing beams.

A PWM (Pulse Width Modulation) type of high voltage, however, provides the maintenance of beam linearity and uniformity in screen size via a quick response to beam change by performing sync lock every 1H line, and detecting beam fluctuation at 1H line, and then controlling the IC current of high voltage output circuit.

1. High Voltage Fluctuation Detect (DC Detect)

FBT pin 11 detects DC high voltage fluctuation. The detected DC high voltage value is input to PWM IC471 pin1 through R473, VR471, R471, and then it is input to a differential AMP circuit that differentiates the gap after comparing with the reference voltage input to pin2.

2. High Voltage Fluctuation Detect (AC Detect)

To check AC high voltage fluctuation, the output from FBT is detected by using a capacitor inside the high voltage distributor. The detection of AC high voltage fluctuation, a detection of dynamic beam current change is required in order to keep beam linearity and uniformity in size.
Regarding the capacitor, a capacity of less than 3000P should be applied to a PWM type. (The existing type needs a capacity of about 6000P.)
AC detect circuit eliminates unnecessary high frequency by using C476, D472. Also, AC gain is limited to + / - 0.7V (D472). This AC gain is combined with the detection value of DC high voltage fluctuation by using C478.

3. PWM IC OSC Sync Lock

A PWM type IC needs sync lock for PWM pulse and horizontal scan line.
The standard time constant of OSC circuit is determined by C487, R475 (PWM IC pins 5 and 6). And the standard OSC frequency is about 27 kHz . The horizontal frequency of scan line is 31.5kHz(NT), 31.25kHz(PAL), so sync lock for this horizontal frequency should be performed using sync lock circuit. The sync lock circuit consists of Q481(Tr KSC815-Y), D479, D478, and C492. The input AFC signal is connected to PWM IC pin 5 through D479 so that it can be negative Trig.

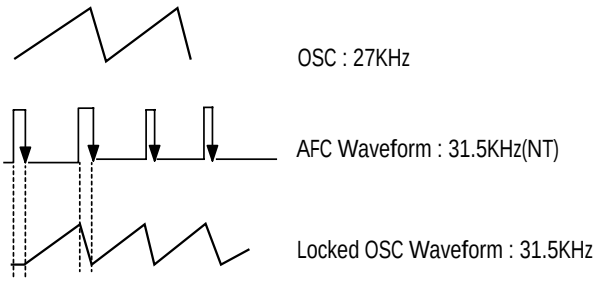

4. Dead Time (HV Protect)

Dead Time (PWM IN pin4) consists of C481, delays high voltage for a certain time to soft start in power on, a x-ray protection circuit. The voltage of Dead Time is detected by FBT pin7 and through DC Feedback. The normal voltage of Dead Time is +27V. When high voltage increases, however, detected voltage is in proportion to high voltage. Then, the detected voltage is applied to ICR01S(TL431).
If the voltage is over 2.5V (normal:about 2.25V), TL431 turns ON, the base port of QR401S becomes low, and then an emitter current flows. At this time, a high voltage protection point is set. When QR401S turns ON, high voltage is applied to PWM IC pin4 and then muted.

5. Output Circuit

The voltages, which are detected form an error detection circuit of PWM IC (Differential AMP) and Dead Time, each is applied to PWM conparator . Due to these detection coltages, Q1, Q2 (Output TR) parallel operate. Q482 (External TR), however, functions as a buffer; natches inpedance between the output port of PWM IC and the final output TR(IRFS640). The PWM pulse (applied to the final output FET (IRFS640 GATE) varies the IC current of high voltage TR(Q473) by adjusting the load impedance of starage Trans (T431). Due to this variation of current, the gain for Q473 emitter pulse changes T444(FBT)makes this emitter pulse became high voltage. Such change keeps both dynamic and static changes fixed. The output waveform of high valtage TR emitter is as shown in the figure below.

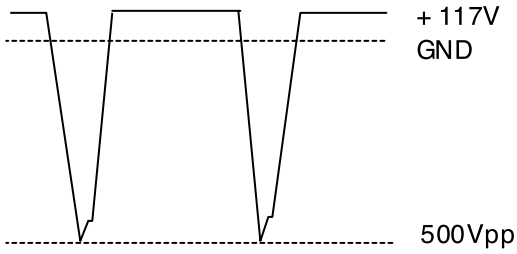

6. Paraneters according to beam

To maintain the set high voltage value (31kV), parmaters such as +Ve (DC), Vcp High Voltage change (See the table below).

Factor of high voltage change	Parameters			
	Width of FET Gate Pulse	+ Ve (DC)	Vcp	High Voltage
Beam ↓ (High voltage ↑)	↓	↑	↓	↓
Beam ↓ (High voltage ↑)	↑	↓	↑	↑

7. Response Waveform

To reduce unstable high voltage fluctuation, the existing high voltage type REG circuit controls dynamic fluctuation by using C-block capacitor. But, it can't detect actual dynamic fluctuation. Also, its velocity of response to static fluctuation is late because +B power supply changes per about 1V. A PWM modulation type REG detects static, dynamic high voltage fluctuation for only Ton Time (when the current of the output TR collector flows) each 1H, and modulates the width of PWM pulse. So, this PWM type has better improvement in the characteristic of high voltage REG as compared to the existing type.

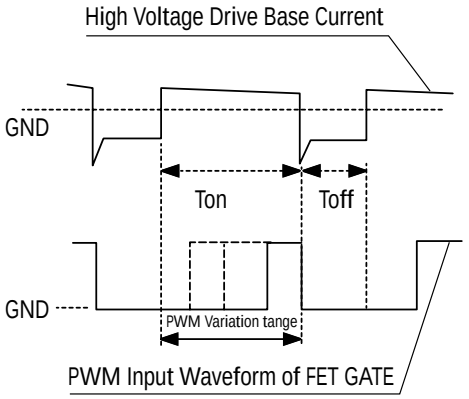

8. Application Effects

1) Improvement of horizontal size fluctuation
2) Linearity improved
3) Embodiment of X-ray protection circuit

The figures below show characteristics when a PWM high voltage REG circuit is applied.

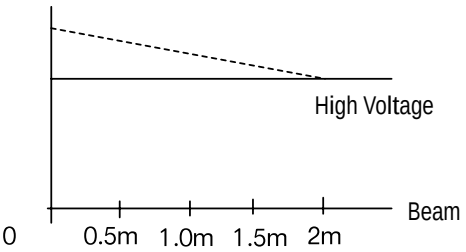



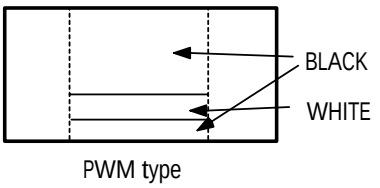



When a Toshiba Pattern is recrived, the screen is displayed as shown in figute side

1-6 SCREEN-JIG

1-6-1 42W5

42W5 Screen Size : X 932, Y 524 (X:764 = 22 x 2 + 60 x 12, Y:262 = 17 x 2 + 38 x 6)-PAL MODE

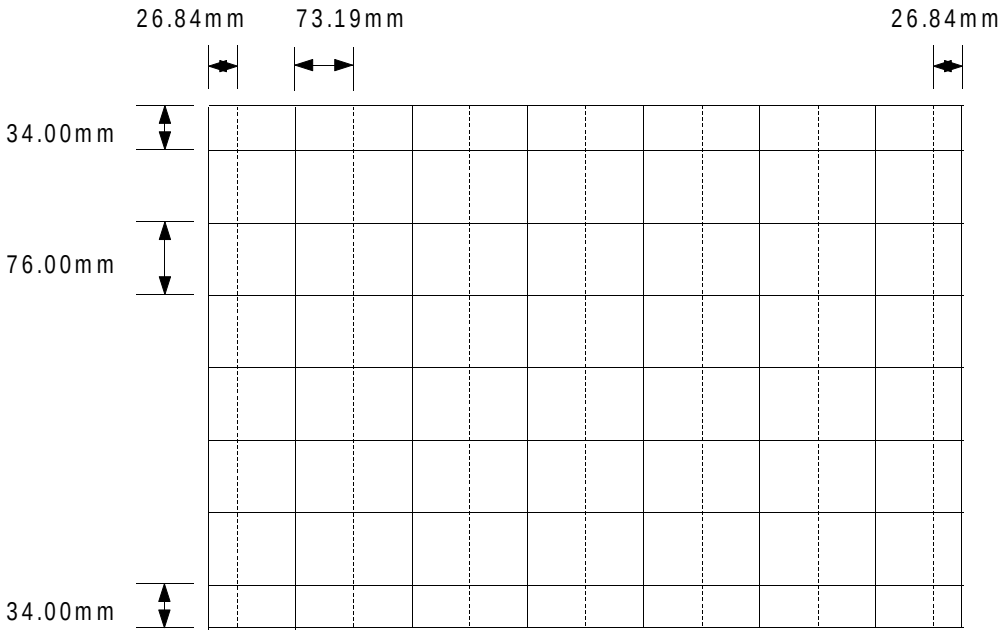

1-6-2 47W3

47W3 Screen Size : X 1045, Y 588 (X:764 = 22 x 2 + 60 x 12, Y:262 = 17 x 2 + 38 x 6)-PAL MODE

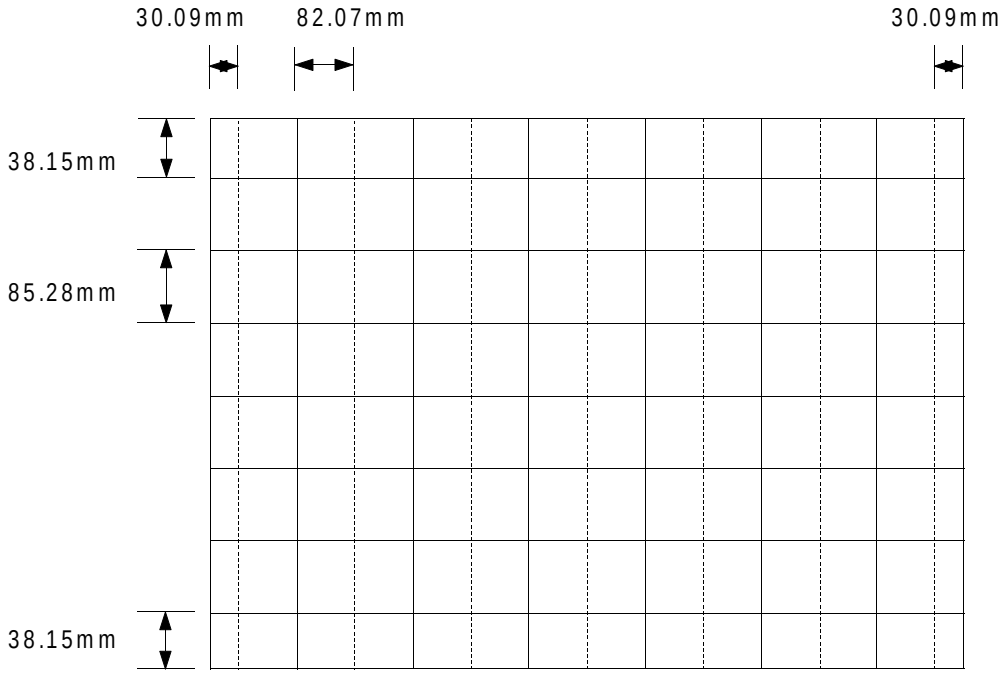

1-6-3 55W3

55W3 Screen Size : X 1225, Y 686 (X:764 = 22 x 2 + 60 x 12, Y:262 = 17 x 2 + 38 x 6)-PAL MODE

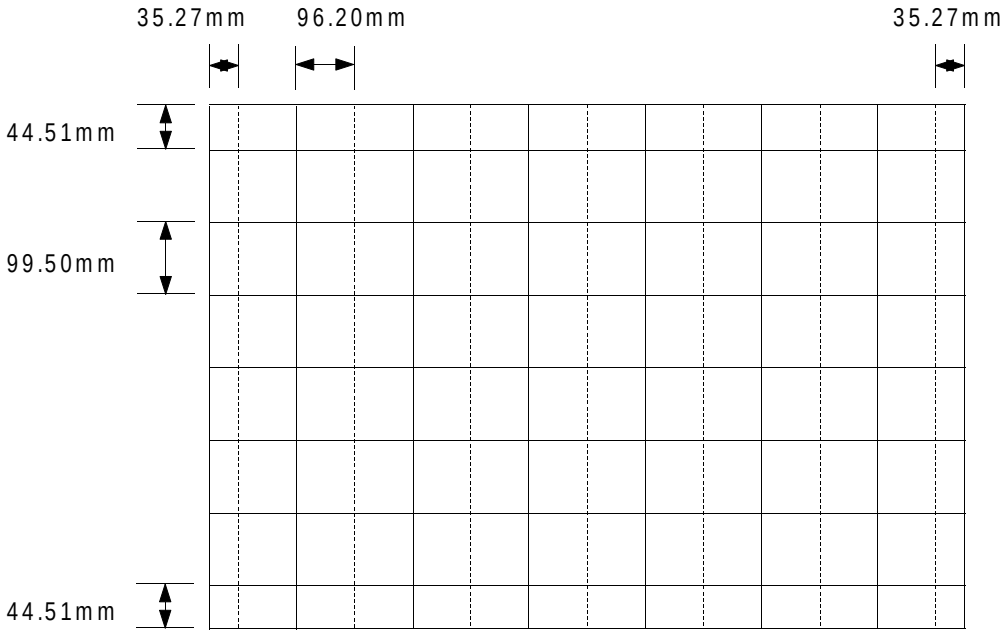

1-6-4 65W3

65W3 Screen Size : X 1442, Y 838 (X:764 = 22 x 2 + 60 x 12, Y:262 = 17 x 2 + 38 x 6)-PAL MODE

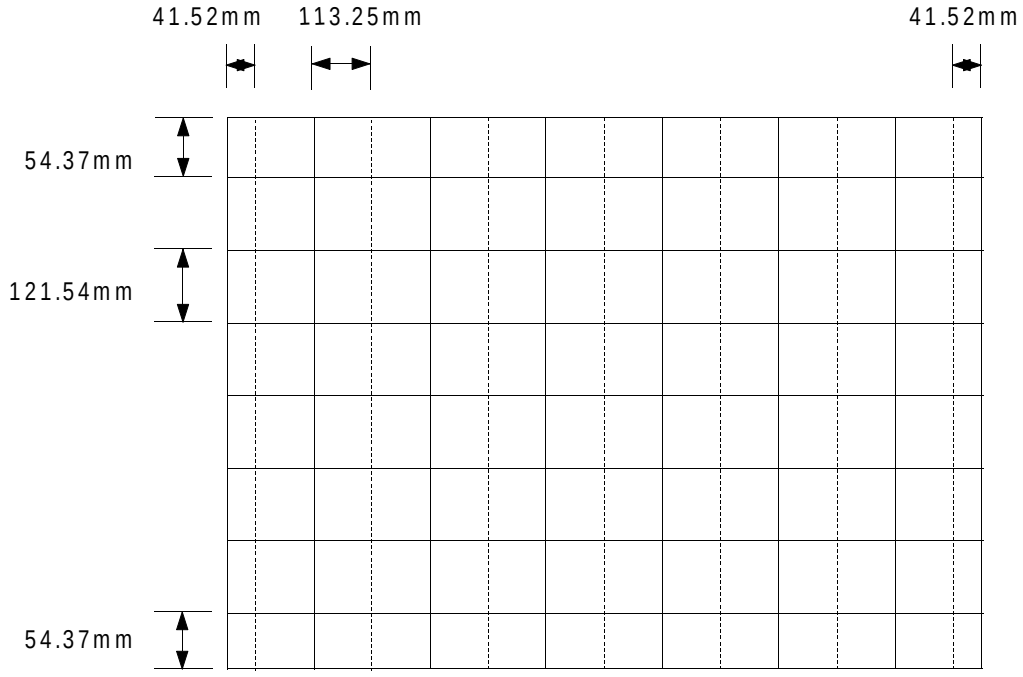

1-6-5 43T6/43T7

43T6 Screen Size : X 885, Y 666 (X:764 = 22 x 2 + 60 x 12, Y:262 = 17 x 2 + 38 x 6)-PAL MODE

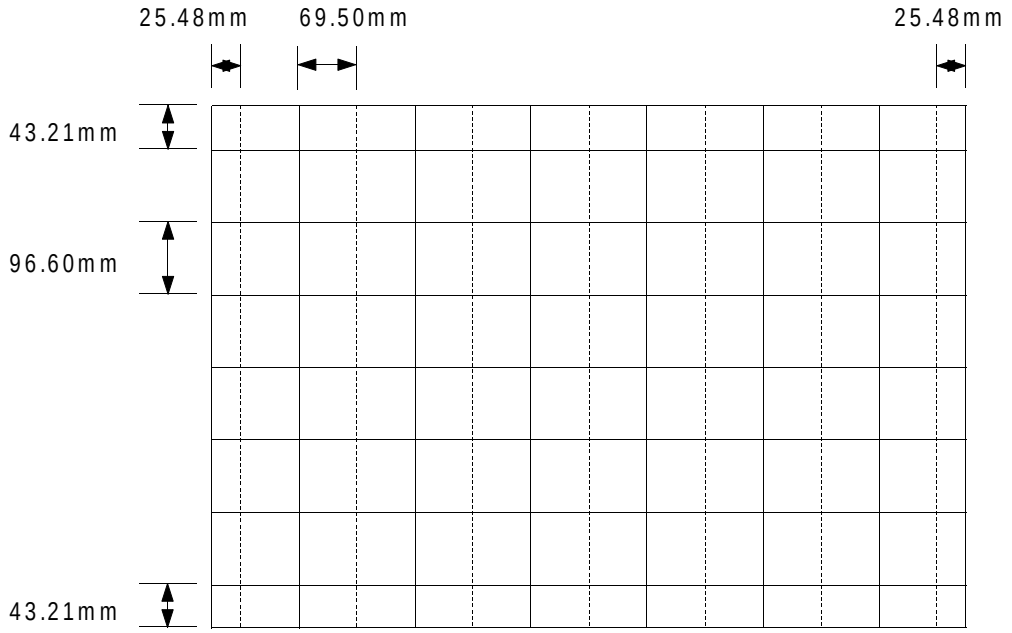

1-6-6 48T6

48T6 Screen Size : X 973.4 Y 738.4 (X:764 = 22 x 2 + 60 x 12, Y:262 = 17 x 2 + 38 x 6)-PAL MODE

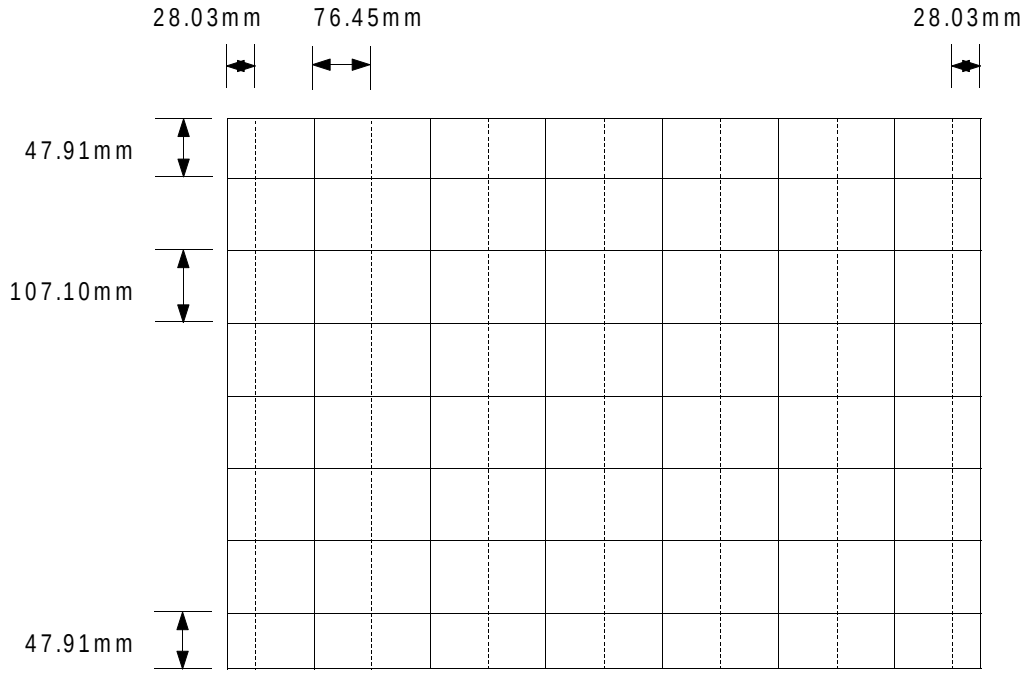

1-6-7 54T6

54T6 Screen Size : X 1099 Y 823 (X:764 = 22 x 2 + 60 x 12, Y:262 = 17 x 2 + 38 x 6)-PAL MODE

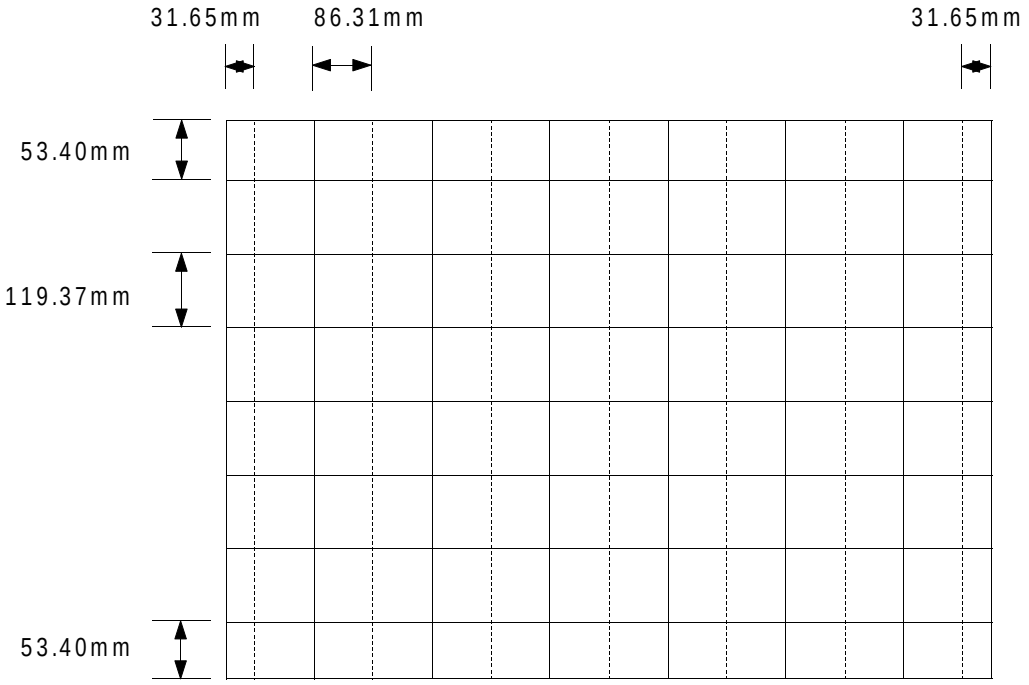

1-6-8 62T6

62T6 Screen Size : X 1259.4, Y 948 (X:764 = 22 x 2 + 60 x 12, Y:262 = 17 x 2 + 38 x 6)-PAL MODE

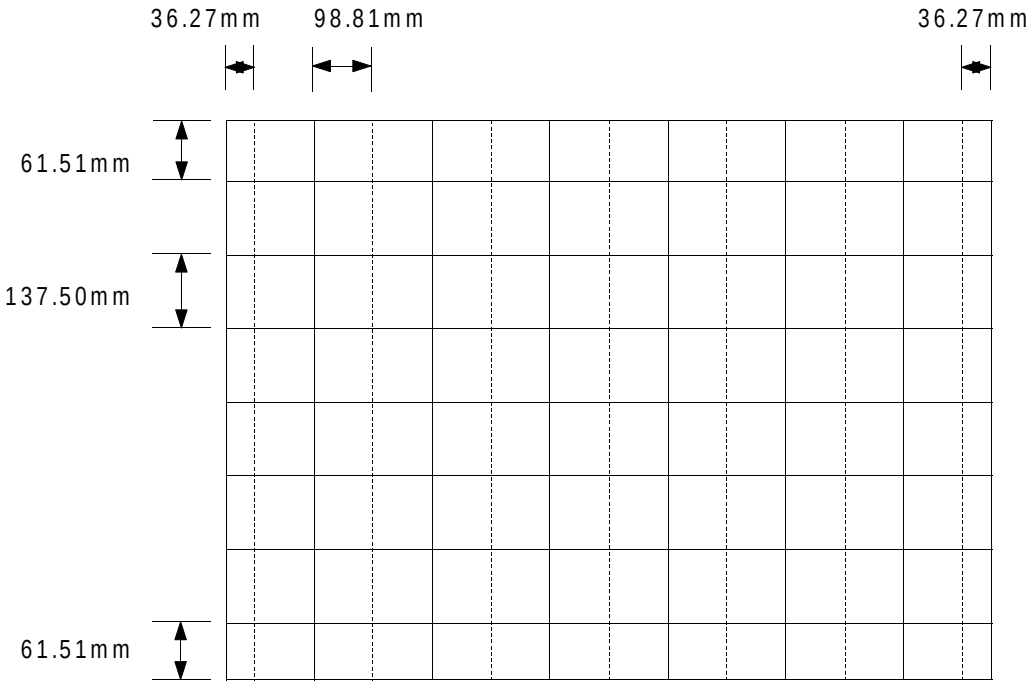

1-7 Remote Control for Servicing(Convergence Mode)

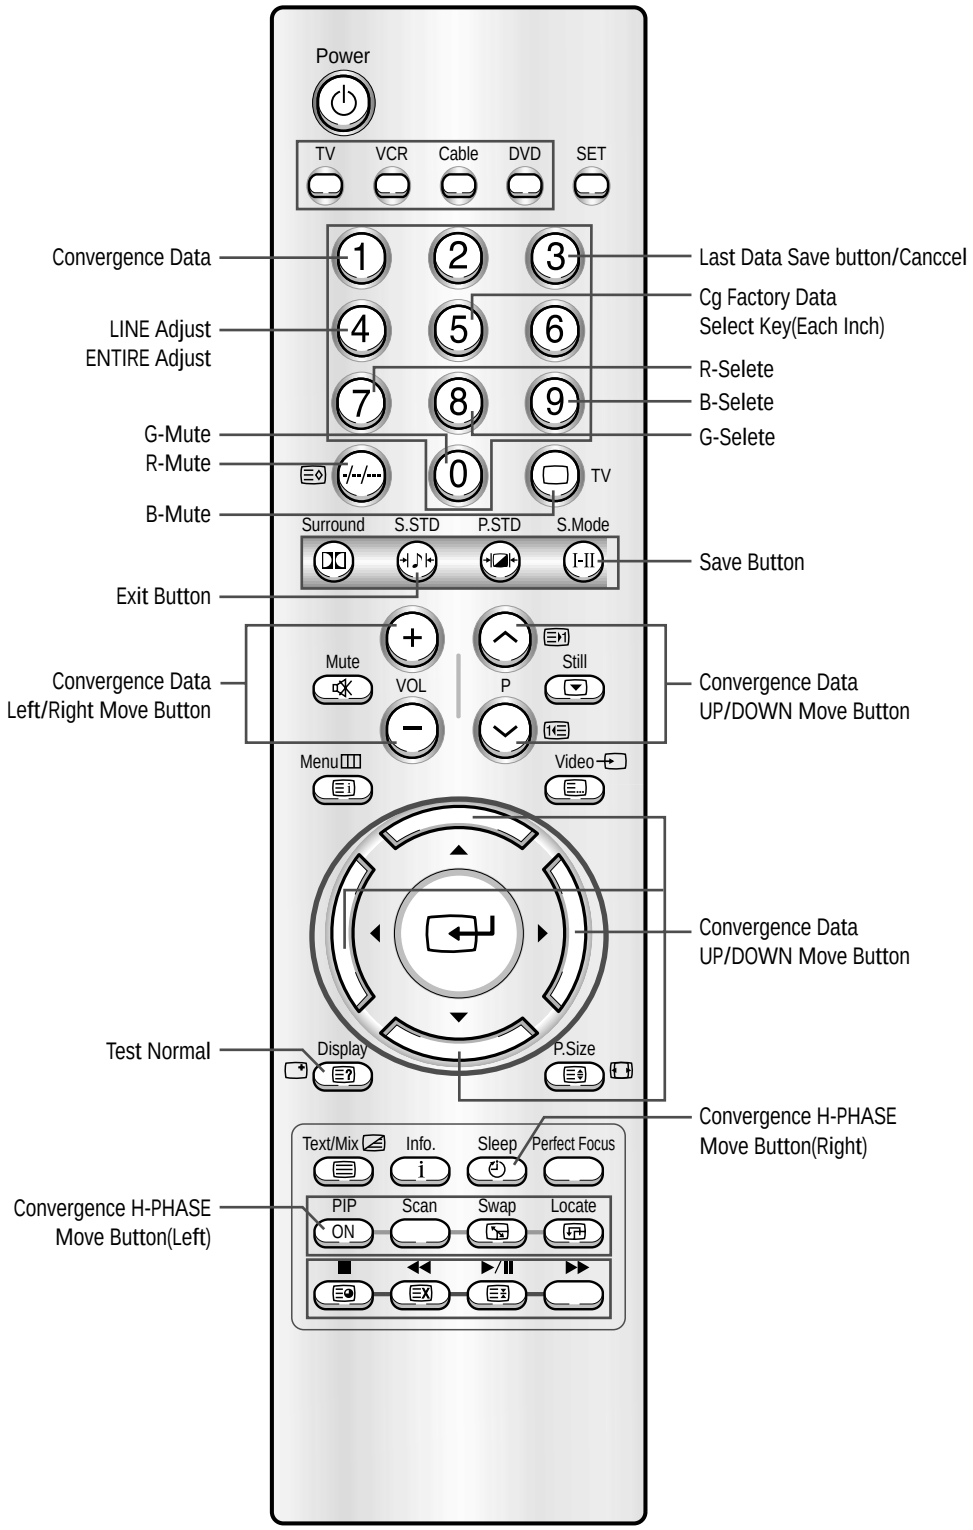

1-7-1 KEY Function

1. R-SELECT (7)
   Press to select RED color.

2. G-SELECT (8)
   Press to select GREEN color.

3. B-SELECT (9)
   Press to select BLUE color.

4. R-MUTE (-/--)
   Press to mute RED color.

5. G-MUTE (0)
   Press to mute GREEN color.

6. B-MUTE TV
   Press to mute BLUE color.

7. CANCEL KEY (3)
   Press to revert to the previous data during the Convergence Adjustment.

8. TEST / NORMAL Display
   Press to check TV mode in the Convergence Mode.

9. LINE SHIFT (4)
   Press to move a line up / down or left / right.

10. FACTORY DATA SELECT BUTTON (2)
    Press to call the factory default values.

11. SAVE BUTTON S.Mode (I-II)
    After the Convergence Adjustments are completed, press to save data.

12. EXIT BUTTON S.STD
    After the Convergence adjustments are completed, press to exit to TV mode.

13. CURSOR MOVE BUTTON

Press to move the cursor up / down or right / left.

①

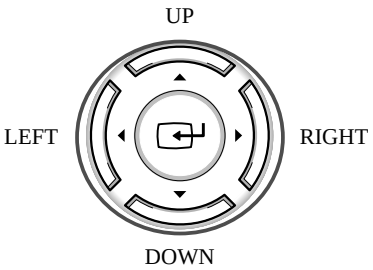

②

③ (Mute) Press to move the cursor left or up.
(Video) Press to move the cursor right or down.
(Menu) Press switch the cursor direction horizontally or vertically.

14. CONVERGENCE PICTURE MOVE BUTTON

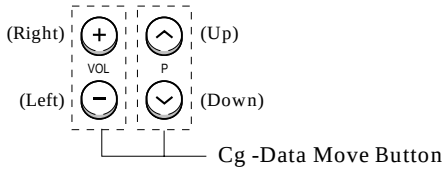

15. CONVERGENCE MOVE BUTTON

Press to move the convergence right (PIP ON) or left (Sleep) .

16. CONVERGENCE DATA ZERO BUTTON ①

Press to zero the convergence correction data.

17. INITIAL DATA SET BUTTON ②

Changes when applying Almighty-Cg, Module (How to extract the basic Cg Data)

Inch (Type)	Model Name	Basic Data	Screen Display
	Representative Model	Number after entring the Cg-Mode	
42” (42W5)	SP42W5	5-425 (Press in regular order)	□□□□ □□□□
47” (47W3)	SP47W3	5-473(Press in regular order)	□□□□
55” (55W3)	SP55W3	5-553(Press in regular order)	□□□□□
43” (43T6	SP43T6	5-436(Press in regular order)	┼┼┼┼
43” (43T7)	SP43T7	5-437(Press in regular order)	┼┼┼┼┼
48” (48T6)	SP48T6	5-485(Press in regular order)	┼┼┼┼┼┼
54” (54T6)	SP54T6	5-545(Press in regular order)	┼┼┼┼
62” (62T6)	SP62T6	5-625(Press in regular order)	┼┼┼┼ ┼┼┼┼
65”(65W3)	SP65W3		

18. Data shift Button Locate Press to transmit data(PAL Mode / NTSC Mode).

1-8 Convergence Adjustment

1-8-1 Convergence Adjustment

NOTE

Special Notes

- A sensor is attached on the center of each side of the Convergence Mode pattern (see figure below). The sensors are required for normal Perfect Focus function.
- Use a screen jig to do the convergence adjustments correctly (Especially, perform correct convergence adjustments on the center of each side where a sensor is located.)
- Do the convergence adjustments correctly. Otherwise, any Perfect Focus error can happen.

1. Warm up the TV for a least 30 minutes.

2. Input an PAL Signal.(Use an antenna or AV source.)

NOTE

Make sure that deflection yoke are properly adjusted so that the center of Green, Red, Blue pattern is aligned on the center of screen jig.

3. Enter the Convergence Mode by Pressing the remote control keys in the following sequence:

Mute → 1 → 8 → 3

NOTE

If OSD displayed as shown in figure below, press the S.STD key to exit.
Then, redo step 3 to enter the Convergence Mode.
After entering the Convergence Mode, Stand by for about five seconds before doing the adjustments.

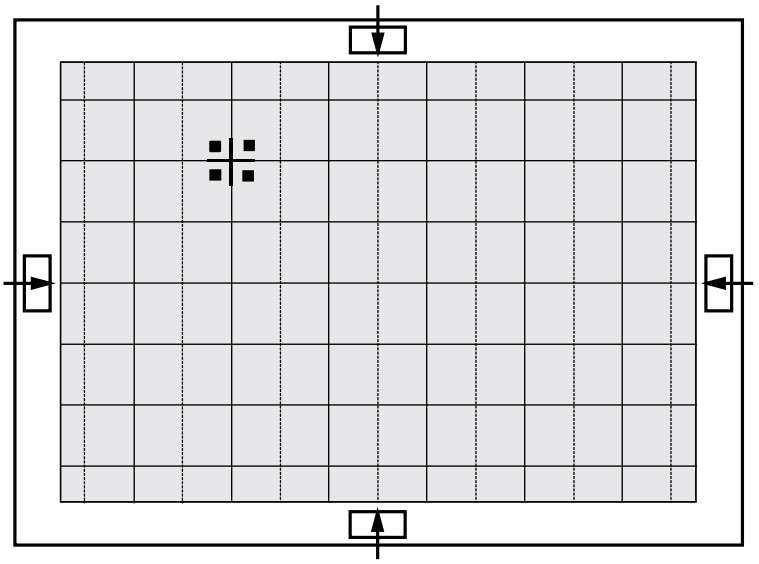

4. To adjust GREEN, first press the -/--/--- and the TV keys, and then press the 8 key.

5. The Menu key moves the cursor horizontally or vertically

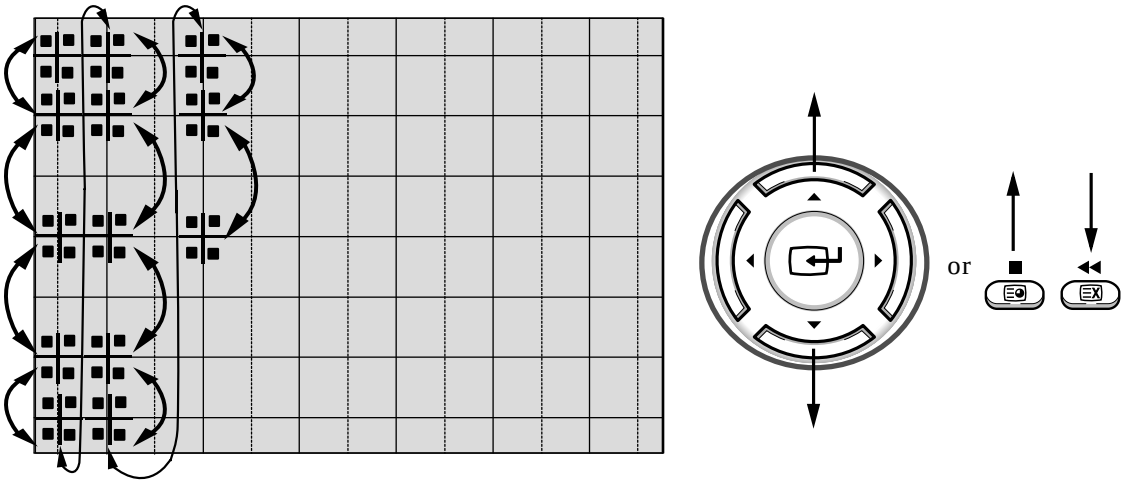

NOTE When the Menu key is pressed once again, the cursor moves horizontally.

6. The Mute key moves the cursor right, and the P.Size key moves the cursor left.

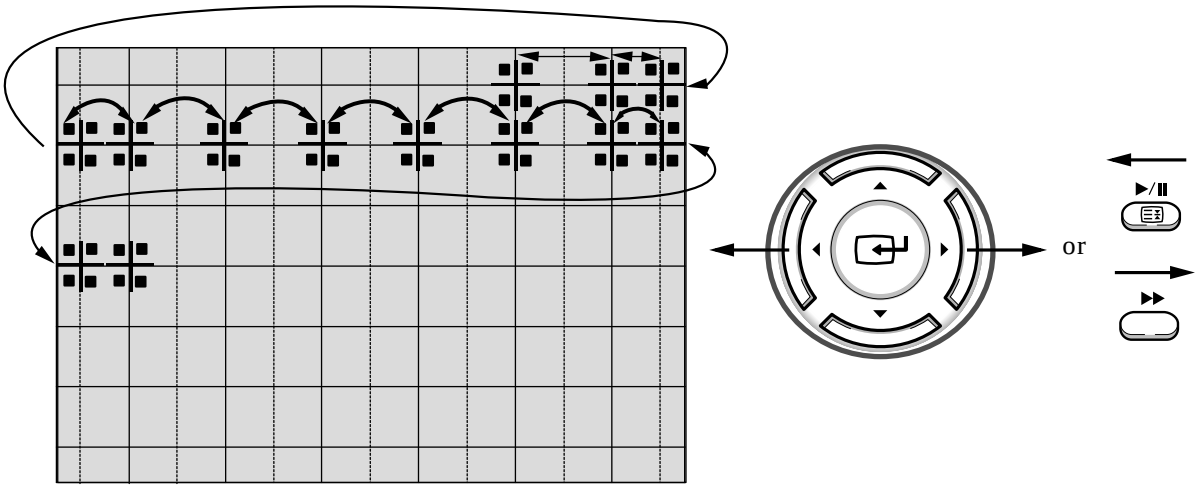

7. Use the (4) key for overall balance.

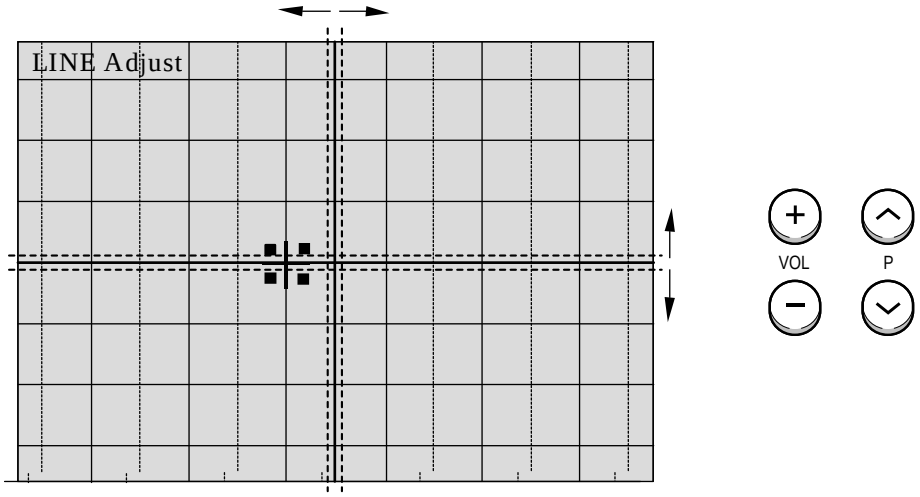

8. After the Line Shift is cancelled by pressing the (4) key, use the Channel and Volume keys (Up/Down/Right/Left) to make big adjustments.

9. After the green convergence adjustments are completed, press the S.Mode (I-II) key to save the data.

10. Superimpose the Red and Green colors by pressing the (-/--/---) and the (7) keys.

11. To adjust RED, redo steps 5~7.

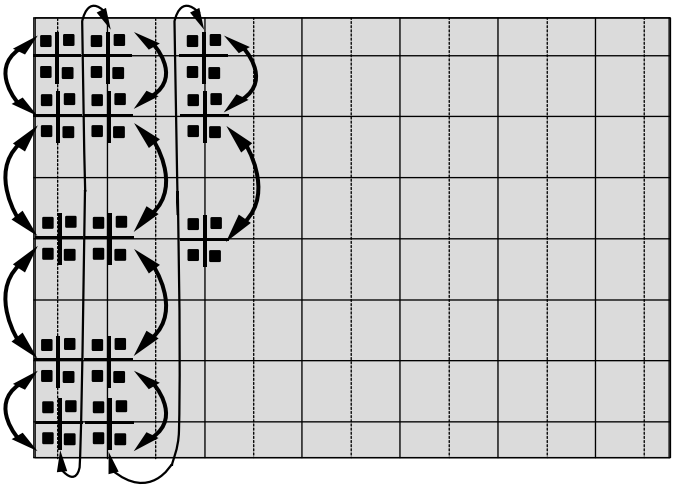

When the cursor moves vertically Menu

12. To superimpose the blue and green colors, press (1) the -/--/--- key for R-Mute, (2) the TV key to cancel the B-Mute, and (3) the 9 key for B-select.

13. To adjust BLUE, redo steps 5 ~ 7, 13.

14. If any color is not properly adjusted when displaying the red, blue and green colors, readjust the color.

15. After the color adjustments are completed, press the S.Mode I-II key to save the data.

NOTE The cursor moves to center, and then automatically moves up and to the left about five seconds later.

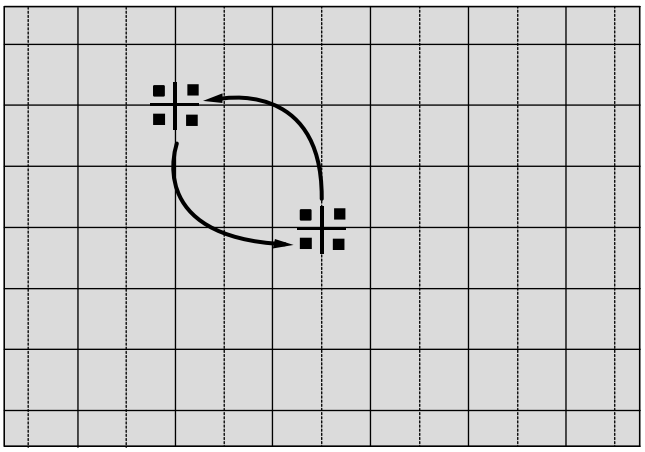

1-8-2 Perfect Focus(Factory Mode)

1. After the adjustment is completely saved, press the Perfect Focus key to perform Auto Convergence(Factory Mode). Auto Convergence is performed in the following sequences:

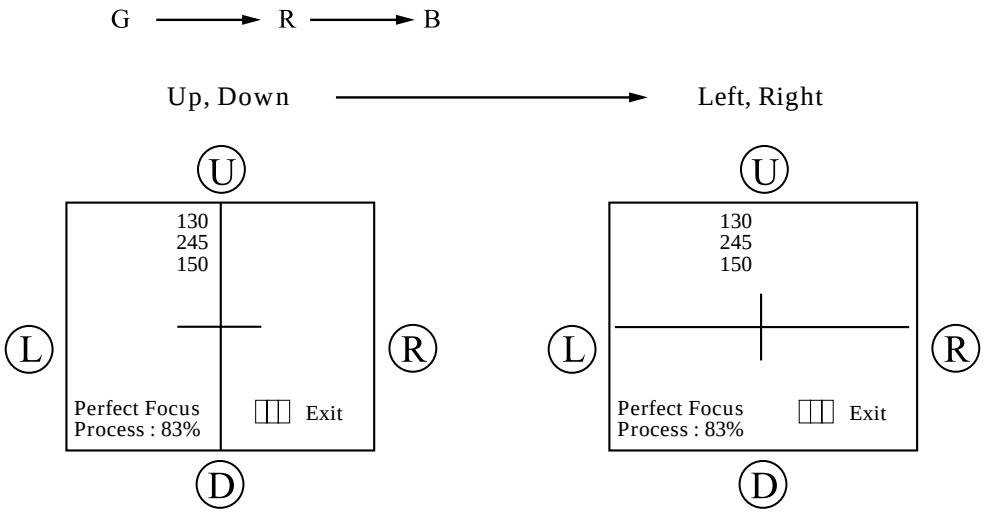

When Auto Convergence is complete, the data is automatically saved and the convergence pattern reverts.

NOTE

- After Factory Auto Convergence is complete, make sure that the cursor flickers for about 1 second on the center and then it is saved.
- Check the presence of error through the flicker of the cursor.
- When any error happens, be sure to re-do Factory Auto Convergence.
- When Convergence Adjustment is not normally done or the convergence center is misaligned with the sensing point, any adjustment error happens. Therefore, be sure to use a screen jig to correctly adjust during troubleshooting.

2. After the Convergence Adjustments are completed, press the S.STD key to exit.

1-9 MICOM and Pins Voltage

1-9-1 Pin Layout(T_CM2P06_XXX)

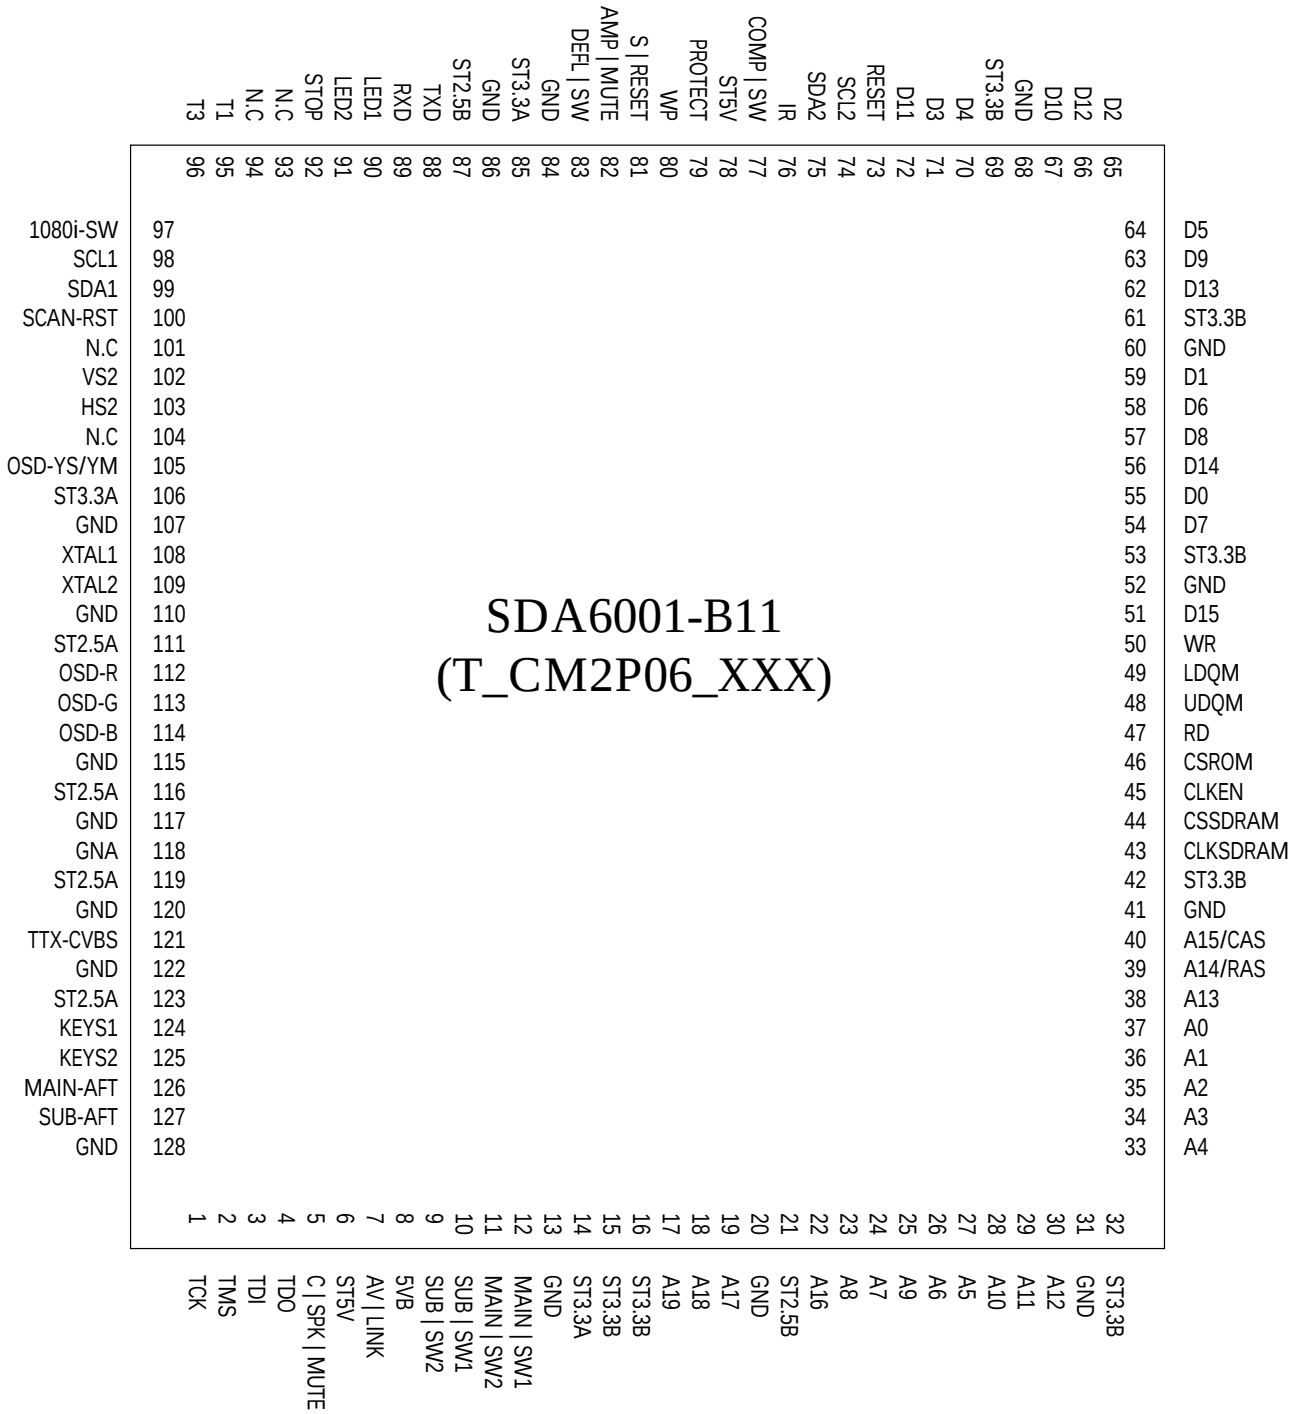

1-9-2 Pin Layout(T_CMDEAC_XXX)

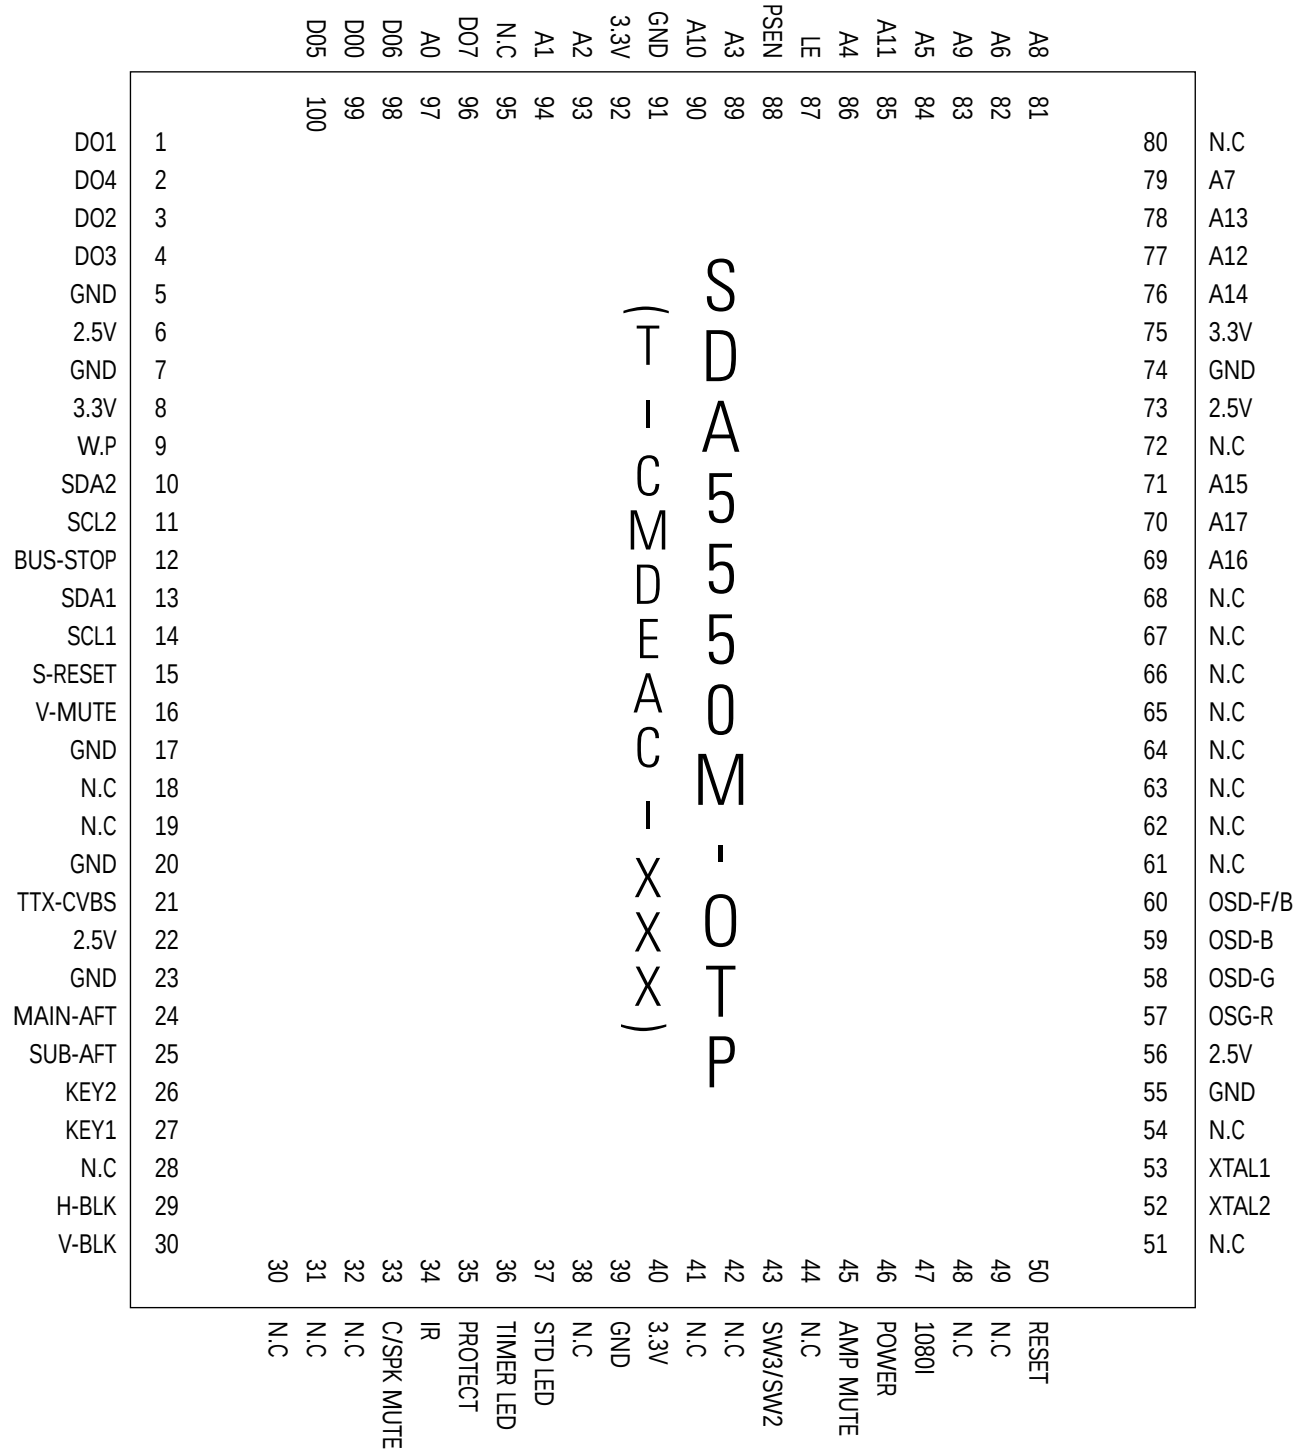

1-9-3 MICOM MODULE Pins

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	KEY 1	KEY SCAN1	2.28[V]
2	PROTECT	PROTECT PORT	0.83[mV]
3	KEY 2	KEY SCAN2	2.25[V]
4	GND	GND	-
5	N.C	N.C	-
6	STB-5(V)	VCC	4.91[V]
7	IR IN	REMOCON INPUT	3.74[V]
8	POWER	POWER ON/OFF RELAY CONTROL	1.03[V]
9	TIMER-LED	TIMER LED	2.07[V]
10	N.C	N.C	-
11	GND	GND	-
12	V-RESET	VIDEO RESET	2.84[mV]
13	SCL1	SERIAL CLOCK LINE1	3.43[V]
14	GND	GND	-
15	SDA1	SEREAL DATA LINE1	3.49[V]
16	S-RESET	SOUND RESET	4.21[V]
17	ST-BY-LED	STAND-BY LED	2.95[V]
18	RESET	RESET	2.47[V]
19	AMP-MUTE	SOUND AMP MUTE	0.89[mV]
20	N.C	N.C	-
21	GND	GND	-
22	N.C	N.C	-
23	SCL2	SERIAL CLOCK LINE2	3.27[V]
24	C-SPK MUTE	CENTER SPEAKER MUTE	3.26[V]
25	SDA2	SERIAL DATA LINE2	3.27[V]
26	SW3	SW3(CONTROL)	5[mV]
27	GND	GND	-
28	SW2	SW2(CONTROL)	2.08[V]
29	SUB-AFT	SUB TUNER AFT CONTROL	2.57[V]
30	GND	GND	-
31	MAIN-AFT	MAIN TUNER AFT CONTROL	1.04[V]
32	BUS-STOP	IIC BUS STOP	3.27[V]

PIN NO.	ITEM	FUNCTION	OUT VOLT
33	5[V]	5[V]	4.96[V]
34	H-BLANK	HORIZONTAL BLANK	215.8[mV]
35	GND	GND	-
36	V-BLANK	VERTICAL BLANK	-12.10[mV]
37	N.C	N.C	-
38	GND	GND	-
39	GND	GND	-
40	N.C	N.C	-
41	VS1	VERTICAL SYNC	-
42	N.C	N.C	-
43	HS1	HORIZONTAL SYNC	215.51[mV]
44	N.C	N.C	-
45	GND	GND	-
46	N.C	N.C	-
47	TTX-CVBS	TTX/CAPTION-CVBS	1.19[V]
48	GND	GND	-
49	GND	GND	-
50	N.C	N.C	-
51	AN-LINK	NOT USE	-
52	N.C	N.C	-
53	GND	GND	-
54	N.C	N.C	-
55	N.C	N.C	-
56	GND	GND	-
57	N.C	N.C	-
58	OSD-TTX-R	ON SCREEN DISPLAY RED	168[mV]
59	GND	GND	-
60	OSD-TTX-G	ON SCREEN DISPLAY GREEN	0.46[V]
61	WP	WRITE PROTECT	-
62	OSD-TTX-B	ON SCREEN DISPLAY BLUE	0.46[V]
63	3.3[V]	3.3[V]	3.26[V]
64	OSD-TTX-FB	OSD/TTX-FB	7.31[mV]

1-9-4 PROSCAN MODULE Pins

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	EW	EAST WEST OUT	2.26[V]
2	V-BLK	VERTICAL BLANK	-12.07[mV]
3	ABL	ABL(Automatic Brightness Limiter)	2.26[V]
4	VD-	VERTICAL DRIVE(-VOLTAGE)	3.46[V]
5	VD+	VERTICAL DRIVE(+VOLTAGE)	3.53[V[
6	H-BLK	HORIZONTAL BLANK	215.93[mV]
7	HD	HORIZONTAL DRIVE	2.38[V]
8	GND	GND	-
9	OSD/TTX-FB	OSD/TTX-FB	7.29[mV]
10	OSD/TTX-B	ON SCREEN DISPLAY BLUE IN	0.46[mV]
11	OSD/TTX-G	ON SCREEN DISPLAY GREEN IN	0.46[mV]
12	OSD/TTX-R	ON SCREEN DISPLAY RED IN	167.99[mV]
13	V-RESET	VIDEO RESET	2.94[mV]
14	GND	GND	-
15	SCL1	SERIAL CLOCK LINE	3.42[V]
16	SDA1	SERIAL DATA LINE	3.50[V]
17	N.C	N.C	-
18	COMP	COMP	27.28[mV]
19	GND	GND	-
20	CG-R	CONVERGENCE RED	0.27[mV]
21	CG-G	CONVERGENCE GREEN	0.27[mV]
22	CG-B	CONVERGENCE BLUE	0.29[mV]
23	CG-SYNC	CONVERGENCE SYNC	180.03[mV]
24	D/F	DYNAMIC FOCUS	1.5[V]
25	GND	GND	-
26	9[V]	9[V]	9[V]
27	N.C	N.C	-
28	N.C	N.C	-
29	N.C	N.C	-
30	N.C	N.C	-
31	GND	GND	-
32	13.5[V]	13.5[V]	14.05[V]

PIN NO.	ITEM	FUNCTION	OUT VOLT
33	5[V]-DW1	5[V]-DW1	4.97[V]
34	VM-Y	VM-Y OUTPUT	1.97[V]
35	SW3	SW3(CONTROL)	4.98[mV]
36	SW2	SW2(CONTROL)	2.08[V]
37	N.C	N.C	-
38	GND	GND	-
39	PIP-C	PIP-C INPUT	1.20[mV]
40	PIP-Y CVBS	PIP-Y/CVBS INPUT	1.33[mV]
41	GND	GND	-
42	MAIN-C	MAIN-C INPUT	1.34[mV]
43	MAIN-Y CVBS	MAIN-Y/CVBS INPUT	1.57[mV]
44	N.C	N.C	-
45	GND	GND	-
46	N.C	N.C	-
47	GND	GND	-
48	RF2-CVBS	RF2-CVBS	-
49	DVD-Pr/R	DVD-Pr/R(SCART)	-
50	DVD-Y/G	DVD-Y/G(SCART)	-
51	DVD-Pb/B	DVD-Pb/B(SCART)	-
52	FB	FB(SCART)	-
53	GND	GND	-
54	N.C	N.C	-
55	N.C	N.C	-
56	N.C	N.C	-
57	GND	GND	-
58	DVD-Pr	DVD-Pr	-
59	DVD-Y	DVD-Y	-
60	DVD-Pb	DVD-Pb	-
61	GND	GND	-
62	5[V]-DW2	5[V]-DW2	4.89[V]
63	N.C	N.C	-
64	N.C	N.C	-

1-9-5 CONVERGENCE MODULE Pins

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	5[V]-CG	5[V]-CG	5.2[V]
2	GND	GND	-
3	D/F	DYNAMIC FOCUS	1.5[V]
4	GND	GND	-
5	SCL1	SERIAL CLOCK LINE1	3.4[V]
6	CG-SYNC	CONVERGENCE SYNC	179[mV]
7	GND	GND	-
8	N.C	N.C	5.2[V]
9	CG-R	CONVERGENCE RED	0.27[mV]
10	CG-G	CONVERGENCE GREEN	0.26[mV]
11	CG-B	CONVERGENCE BLUE	0.29[mV]
12	SDA1	SERIAL DATA LINE1	3.5[V]
13	N.C	N.C	-
14	IR	INPUT REMOCON	3.7[V]
15	N.C	N.C	-
16	GND	GND	-
17	GND	GND	-
18	GND	GND	-
19	BV	BLUE VERTICAL OUT	34.27[mV]
20	BH	BLUE HORIZONTAL OUT	-107.32[mV]
21	GV	GREEN VERTICAL OUT	101.52[mV]
22	GH	GREEN HORIZONTAL OUT	-15.83[mV]
23	RV	RED VERTICAL OUT	104.32[mV]
24	RH	RED HORIZONTAL OUT	-88.95[mV]
25	GND	GND	-
26	H-BLK	HORIZONTAL BLANK	275[mV]
27	V-BLK	VERTICAL BLANK	-13.22[mV]
28	GND	GND	-
29	N.C	N.C	-
30	-5[V]	-5[V]	-4.99[V]
31	5[V]	5[V]	5.24[V]
32	GND	GND	-

MEMO

2. Exploded View & Parts List

2-1 SP43T7HFM//XST

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

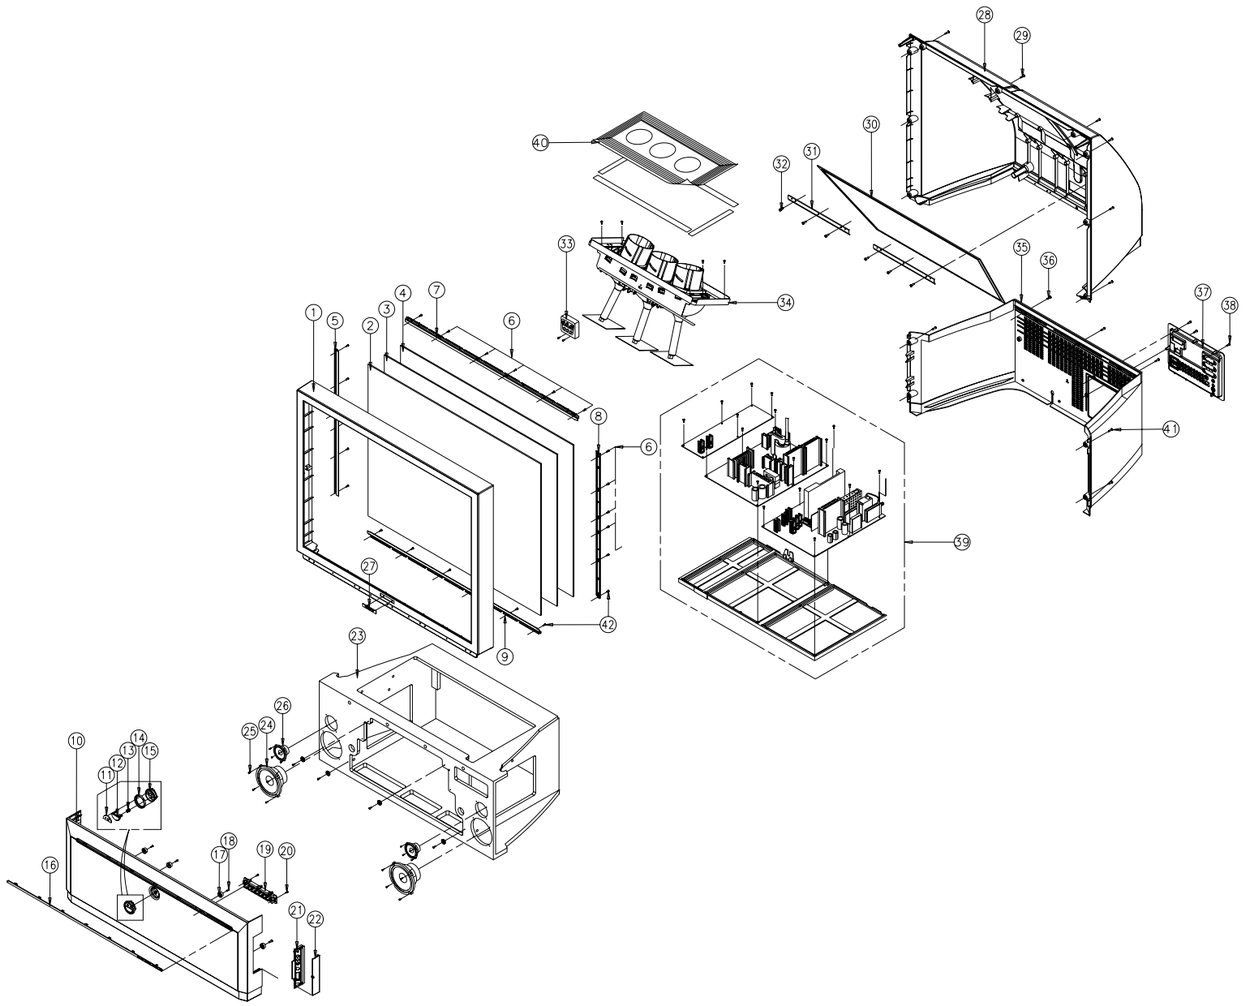

No	Code No	Description	Specification	Q'ty	Remark
1	BP96-00016J	ASSY COVER P-MASK;DP,	AA64-02733G,43T7,A	1	
2	AA67-00115B	SCREEN FRESNEL;43N,910*692,T2		1	
4	AA67-00195A	SCREEN-TINT;43,908*690,P,DNP		1	
5	BP61-00016C	BRACKET-SCREEN,TB;DP,43T7,BP61-00109A		1	
6	6009-001296	SCREW-SPECIAL;BH,+,-,M4,L12(11),ZPC(BLK)		20	BS+CFM
7	BP61-00166A	BRACKET-SCREEN,TOP-ASSY;43T7,SECC,T1.0,SCREEN T3		1	
8	BP61-00167B	BRACKET-SCREEN,RL;DP,43T7,BP61-00110A		1	
9	BP61-00166B	BRACKET-SCREEN,BOT-ASSY;43T7,SECC,T1.0,SCREEN T3		1	
10	BP90-00009C	ASSY COVER FRONT;SP43T7HFS/XST,43T7		1	
11	AA64-02808A	WINDOW-LED;43T7,PMMA,T3.0		1	
12	AA64-02806C	KNOB-POWER;43T7,ABS,HB,G3676,CIS		1	
13	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,-,-,-		1	
14	AA61-01129A	HOLDER-POWER,RMC;43T7,ABS HB,G3676,CR-COATING(SILVER)		1	
15	AA64-02807A	WINDOW-RMC;43T7,PC,CLR		1	
16	AA63-00568A	COVER-DECORATION;43T7,ABS,HB,WHT,SVM6145+CLEAR2129		1	
17	AA61-01132A	VELCRO-A;COMMANDO,BST1 1/4H		4	
18	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWRCH18		4	
19	AA64-02741A	KNOB-CONTROL;43T7,ABS,HB,G3676,SILVER		1	
20	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWRCH18		2	
21	AA61-01128G	HOLDER-SIDE A/V;ABS,HB,43T8,SV012P		1	
22	AA64-02780G	DOOR-A/V;43T8,ABS,HB,SV012P		1	
23	BP96-00008E	ASSY COVER P-WOOD;43T7,WOOD,ENCLOSED SPK		1	
24	3001-000279	SPEAKER;30W,8OHM,91DB,20HZ		2	
25	3001-001107	SPEAKER;20W,8OHM,95DB,1300HZ		12	
26	3001-001107	SPEAKER;20W,8OHM,95DB,1300HZ		2	
27	BP64-00177A	BADGE-BRAND;ALL,AL,T1.5,70,11.3,BLK,SILIVER,SAMSUNG(G/S)		1	
28	BP64-00016A	CABINET-BACK,TOP;DP,43T7,AA64-02734A		1	
29	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWRCH18		9	
30	AA67-00205D	MIRROR-BACK;DP,43T7,SSM,795*569*554*(78)		1	
31	BP61-00012A	BRACKET-MIRROR;DP,42W5,AA61-01123A,11.8K		2	
32	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR		6	BM+CBT
33	AA26-00101A	TRANS FBT-H/V DISTRIBUTOR;FWZ50A001E/FFA		1	
34	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-		1	
35	BP64-00017B	CABINET-BACK,BOT;DP,43T7,AA64-02735B		1	
36	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A		3	CBB+CW
37	BP96-00038L	ASSY COVER P-TERMINAL,ANT;43T7HF,HIPS VO,BLK,0284		1	
38	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWRCH18		3	
39	BP91-00245S	ASSY CHASSIS;SP43T7HFS/XST,J54A,C2.0		1	
40	AA60-00072C	SPACER-COVER,DUST;43T7,SPONGE 94HF-1,T3.		1	
41	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWRCH18		4	
42	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,		4	BS+CFM

2-2 SP62T8HCX/HAC

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

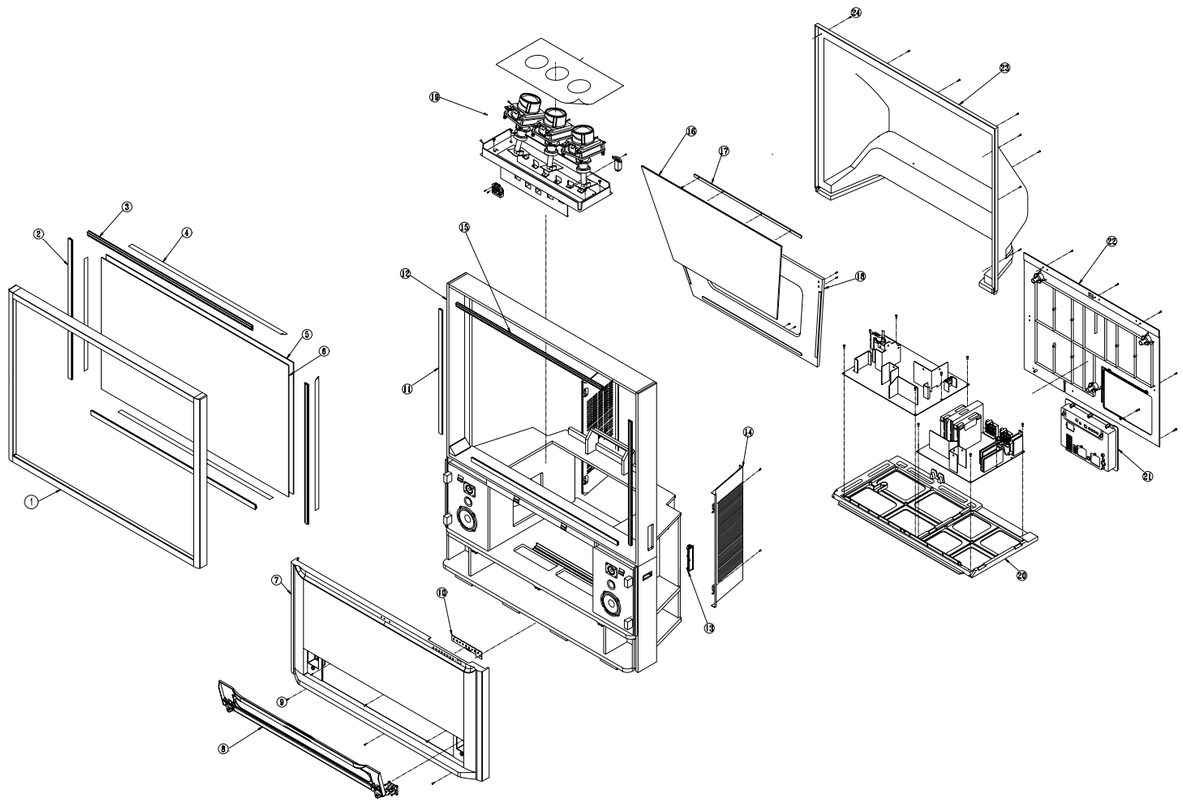

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	BP96-00291C	ASSY COVER P-FRONT MASK;62T8,HIPS,HB,G43		1	T0076	
2		SPACER-SCREEN,OPTION		2		
3		SPACER-SCREEN,OPTION		2		
4	AA67-00131A	SUN SCREEN-AG;62J8,1283*973*,T=82%,G=110		1	T0110	
5	AA67-00201A	SCREEN-TINT;62,1281*971,T=0.7,P		1	T0056	
6	AA67-00117B	SCREEN FRESNEL;62,1283*973,T2		1	T0053	
7	BP64-00246A	CABINET-WOOD;62T8,WOOD,SILVER(SDE8336R),		1		S.N.A
8	BP64-00194A	CABINET-FRONT BOT;62T8,HIPS HB GRY,SV012		1	T0002	S.N.A
9	BP94-00502L	ASSY PCB MISC-CONTROL;SP54T8,J54A,CONTRO		1	T0098	
10	BP94-00502E	ASSY PCB MISC-A/V FRONT;54/62T8,J54A		1	T0100	
11	BP64-00193A	CABINET-BACK SIDE;62T8,HIPS HB BLK,,,,,,		2		S.N.A
12	AA64-01380B	CABINET-BACK,TOP;61J8,HIPS,-,-,-,HB,BLK,		1	T0112	
13	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A		11	HC+CW	S.N.A
14	AA61-00357B	HOLDER-MIRROR;PCJ612R,ABS,-,-,-,BLK,HB,L		1		S.N.A
15		COVER-WOOD,ASSY				
16	AA67-00081A	MIRROR-BACK;62J8,GLASS,1187*725*830,T3.0		1	T0108	
17	AA63-00348B	COVER-DUCT;54,62J8,HIPS,-,-,-,HB,BLK,-		2		S.N.A
18	AA26-00101A	TRANS FBT-H/V DISTRIBUTOR;FWZ50A001E/FFA		1	T0118	
19	BP59-00005A	MODULE-FOCUS PACK ASS'Y;PJT TV,F301-P03A		1	T0103	
20	BP91-00819C	ASSY CPT-R;SP55W3HCX/FES,J54A		1	T0026	
21	BP91-00819D	ASSY CPT-G;SP55W3HCX/FES,J54A		1	T0027	
22	BP91-00819E	ASSY CPT-B;SP55W3HCX/FES,J54A		1	T0028	
23	AA61-01127A	HOLDER-CHASSIS;COMMANDO,HIPS V0,G4309		1	T0070	S.N.A
24	BP94-00445A	ASSY PCB MAIN;SP43T6HCX/FES,J54A,C2.0		1	T0073	
25		ASSY PCB MISC-PWR-DEF				
26	AA64-02266B	CABINET-BACK,BOT;PJTV,HIPS,HB,BLK,P55A		1	T0112	
27	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A		9	HC+CW	S.N.A
28	BP94-00370A	ASSY PCB MISC-SPK TERMINAL;SP43T7HFX/SAP		1	T0130	

2-3 SP54T8HCX/BWT

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

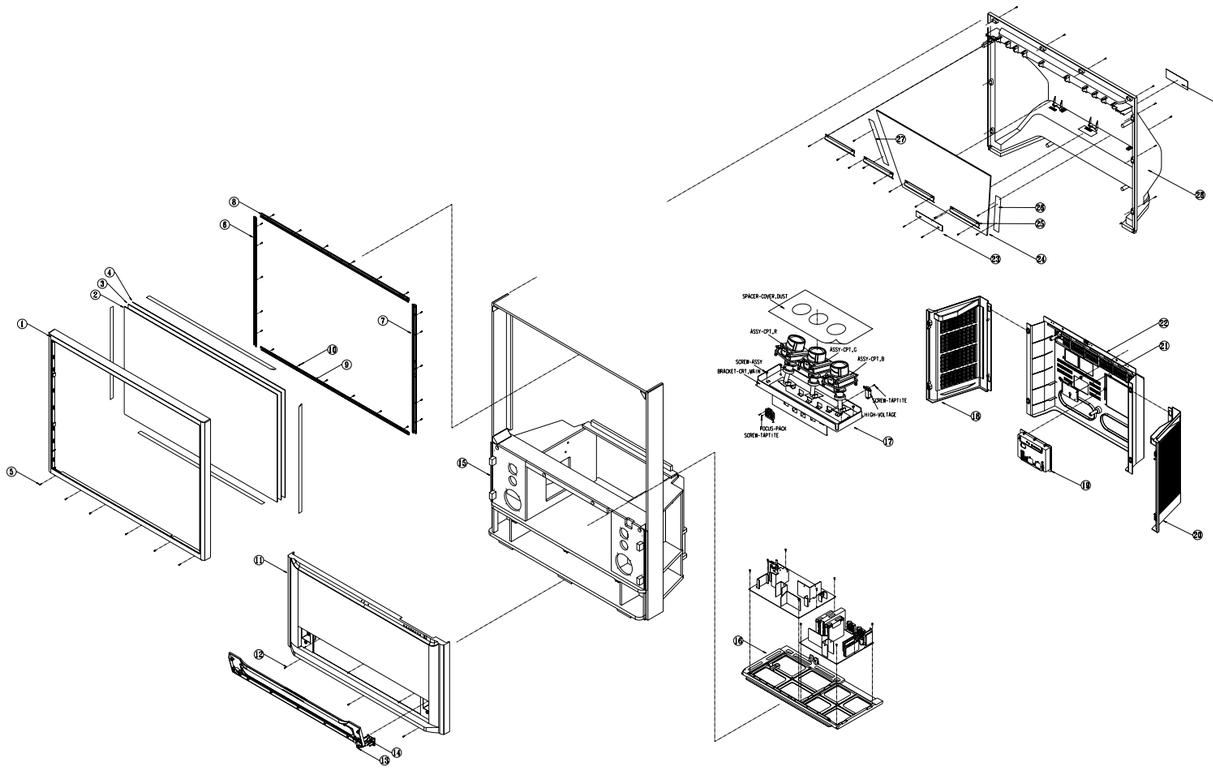

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	BP96-00229C	ASSY COVER P-FRONT	MASK;54T8,HIPS,HB,GRY	1	T0076	
2	AA67-00130A	SUN SCREEN-AG	54J8,1125*853*,T=82%,G=110	1	T0110	
3	AA67-00199A	SCREEN-TINT	54,1123*852,P=0.5,DNP	1	T0056	
4	AA67-00116B	SCREEN FRESNEL	53,1125*854,T2	1	T0053	
5	6005-001003	SCREW-WOOD	HH,+,M4,L19,ZPC(BLK),SWRCH18A	6		S.N.A
6	BP96-00228A	ASSY MISC P-BRKT SCREEN R	54T8,SECC T1.0	1		S.N.A
7	BP96-00228B	ASSY MISC P-BRKT SCREEN L	54T8,SECC T1.0	1		S.N.A
8	BP96-00227A	ASSY MISC P-BRKT SCREEN TOP	54T8,SECC T1	1		S.N.A
9	BP96-00227B	ASSY MISC P-BRKT SCREEN BOT	54T8,SECC T1	1		S.N.A
10	6009-001296	SCREW-SPECIAL	BH,+,-,M4,L12(11),ZPC(BLK)	22	HC+CW	
11	BP96-00230C	ASSY COVER P-FRONT BOT	54T8,HIPS,HB,G430	1	T0071	
12	6005-001003	SCREW-WOOD	HH,+,M4,L19,ZPC(BLK),SWRCH18A	6		S.N.A
13	BP96-00232A	ASSY MISC P-DOOR RACK	54T8,MOLD+GLASS+BR	1	T0269	
14	6002-000522	SCREW-TAPPING	TH,+,2,M4,L15,ZPC(BLK),SWR	3	T0081	
15	BP96-00226B	ASSY COVER P-WOOD	54T8,WOOD,J54A,ASIA	1		S.N.A
16	BP94-00413A	ASSY PCB MAIN	SP43T6HF1X/BWT,J54A	1	T0073	
17	BP91-00587A	ASSY PRT	SP47W3HCX/FES,J54A,C2.0 S100-50	1		S.N.A
18	BP64-00153A	CABINET-BACK,SIDE R	54T8,HIPS,HB,BLK	1	T0014	
19	AA65-00023A	TERMINAL-BOARD,ANT;	HIPS V0,BLK	1		S.N.A
20	BP64-00153B	CABINET-BACK SIDE L	54T8,HIPS,,,,HB,BLK,	1	T0015	
21	BP61-00180C	HOLDER-POWER	HIPS,T8,Q7,V0,BLK	1	T0062	S.N.A
22	BP64-00152A	CABINET-BACK,BOT	54T8,HIPS,HB,BLK	1	T0112	
23	AA61-01134A	HOLDER-MIRROR,BOT	43,54T6,HIPS HB,BLK	1		S.N.A
24	AA67-00080A	MIRROR-BACK	54J8,GLASS,940.5*684.5*674.5	1	T0108	
25	AA91-00489B	ASSY-BRKT,MIRROR	-,-,SECC-1 T1.0,54J8	4	T0068	
26	AA91-00887A	ASSY-HOLDER,MIRROR(R);	HIPS HB BLK,INLAY	1		S.N.A
27	AA91-00887B	ASSY-HOLDER,MIRROR(L);	HIPS HB BLK,INLAY	1		S.N.A
28	AA64-01379B	CABINET-BACK,TOP	54J8,HIPS,-,-,-,HB,BLK,	1	T0112	
29	AA64-60449B	INLAY-COVER	SP-434JMF,PS,T0.5,149.3X69.5	1	CBT	S.N.A

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

3. Electrical Parts List

3-1 SP43T7HFM/XST

Loc. No.		Code No.	Description ; Specification	Remark

ASSY SKD PART

1		AA92-07151A	ASSY SKD PART;SP43T7HFS/XST,J54A,C2.0
2		AA26-00101A	TRANS FBT-H/V DISTRIBUTOR;FWZ50A001E/FFA
2		AA39-30007A	CBF IF;-,T,100mm,1365#26
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,
2		AA65-30104C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,
2		AA65-30105C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,
2		AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,
2		AA68-00227A	LABEL-CUSTOMS;T/P 90(G),-,THAILAND,-,L53
2		AA68-50067B	LABEL-RATING;ART PAPER(90),ALL MODEL,LAM
2		AA68-50418D	LABEL-STICKER;A/P100(G),-,THAILAND,-,L53
2		AA68-50523A	LABEL-BACK,DOLBY;A/P 100(G),CW764AHD,DOL
⚠ 2		AA96-20112G	ASSY POWER CORD;-,EP2/NO,H/S 150MM,KJ10,
3		3811-000401	WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22
3		AA39-10006K	CBF POWER CORD;-,KJ-10,SPT-2 2/18AWG,240
4		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-
3		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002

ASSY K/D-SKD P/MATERIAL

1		AA98-01629A	ASSY K/D-SKD P/MATERIAL;SKD FORMAT-3
2	SMALL	0203-001269	TAPE-OPP MASKING;#301,T0.06,W75,L50000,N
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X
2		AA61-30009A	LOCKER-BAND,CLIP;-,SPC-1,-,-,18MM T0.5,-
2	WOODEN	AA63-10007C	BAND-PP;W18,CLEA,1G
2		AA69-01087A	PALLET-CKD;CKD,PAPER,1130,600,130
2	WOODEN	AA69-01088S	PALLET;BOX-PAPER,PAPER,1100,840,130
2	WOODEN	AA69-01574B	PAD-UNICOM;,UNICOM,1082,822,T30
2	WOODEN	AA69-01574C	PAD-UNICOM;,UNICOM,1060,800,T30
2	WOODEN	AA69-01618A	MASTER CARTON-IN;,CB DW-3,YEL,1067,807,5
2	WOODEN	AA69-01619A	MASTER CARTON-OUT;,CB DW-3,YEL,1085,825,
2		AA69-10038A	PAD-PLATE;CB DW-2,YEL,995,685,-,-,-,-
2	SMALL	AA69-10040L	PAD-PLATE;CB SW-3,YEL,550,360,-,B-TYPE,-
2		AA69-10045A	PAD;PS,-,900,360,T18,C=0.016,-,-
2		AA69-10045B	PAD;PS,-,-,-,T36,C=0.016,-,-
2	SMALL	AA69-40004F	MASTER CARTON;-,CB SW-2,-,355,265,255,YE
2		AA69-40008A	MASTER CARTON;-,CB DW-3,-,1095,555,800,Y
2		AA69-40009A	MASTER CARTON;-,CB DW-3,-,1115,580,90,YE
2	SMALL	AA69-40013C	MASTER CARTON;-,CB DW-3,-,560,370,275,YE
2		AA69-40014A	MASTER CARTON;-,CB DW-3,-,765,570,265,YE
2		AA69-90001A	CHEMICALS-SILICAGEL;-,-,-,-,-,M2,5GR,-,-
2		AA02-00013A	TAPE ETC-RIBBON;-,-,-,101CM,250MT,-,-,-
2		AA02-00015A	TAPE ETC-RIBBON;-,-,-,64CM,250MT,-,-,-
2		AA68-01205A	LABEL-SERIAL,NO;ALL MODEL,-,-,8MM,35MM,-

ASSY COVER FRONT

1		BP90-00009C	ASSY COVER FRONT;SP43T7HFS/XST,43T7
2		0201-001030	ADHESIVE-SIL;SE9178,GRY,NON-FLOW,UL94V0
2		0203-001290	TAPE-OPP MASKING;ANT 100C,T0.073,W30,L50
2	SCREEN	0203-001329	TAPE-OPP MASKING;ANT-300P,T0.07,W15.0,L5
2	TB+PCB	6002-000514	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(BLK),SWR
2	CBT+CF	6002-000514	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(BLK),SWR
2	CBBCFB	6002-000514	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(BLK),SWR
2	CBB+TB	6002-000514	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(BLK),SWR
2	BM+CBT	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR
2	PP+CFM	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW
2	FP+BFP	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW
2	CP+KC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW
2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A
2	CFM+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A
2	CBT+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A
2	CBB+HC	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A
2	CBB+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A
2	BCM+CW	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL)
2	BS+CFM	6009-001296	SCREW-SPECIAL;BH,+,-,M4,L12(11),ZPC(BLK)
2		AA60-00072C	SPACER-COVER,DUST;43T7,SPONGE 94HF-1,T3.
2	AC+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,
2	BS+CFM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,
2	HV+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,
2		AA61-00617B	BRACKET-CRT,MAIN;DP,54J7,AA61-00475B
3		0203-001269	TAPE-OPP MASKING;#301,T0.06,W75,L50000,N
3		AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-
3		AA61-30009A	LOCKER-BAND,CLIP;-,SPC-1,-,-,18MM T0.5,-
3		AA63-10007C	BAND-PP;W18,CLEA,1G
3		AA69-01087L	PALLET-CKD;CKD,PAPER,1150,990,130
3	487	AA69-01402A	PAD-PLATE;,CB DW-2,YEL,100,100
3	788	AA69-01410A	MASTER CARTON;,CB DW-3,YEL,100,100,100
2		AA61-00618C	GUIDE-FLOW;54J8,J7,ABS,IVORY,V0
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR
2		AA65-00020A	CLAMPER CORE-WIRE;55W9,NYLON 66
2		AA67-00115B	SCREEN FRESNEL;43N,910*692,T2
2		AA67-00195A	SCREEN-TINT;43,908*690,P,DNP
2		AA98-01574B	ASSY K/D-SPEAKER;SP42W5HPS/XEF,J54A
3		3001-000279	SPEAKER;30W,8OHM,91DB,20HZ
3		3001-001107	SPEAKER;20W,8OHM,95DB,1300HZ
3		AA39-00086A	LEAD CONNECTOR-ASSY;,2.2UF,200MM,REC,REC
3		AA98-00049A	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505
4		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G
3		BP39-00009A	LEAD CONNECTOR-ASSY;P54A/SVP-42W5,UL2547
2		BP61-00016C	BRACKET-SCREEN,TB;DP,43T7,BP61-00109A
2		BP61-00017C	BRACKET-SCREEN,RL;DP,43T7,BP61-00110A
2		BP61-00043B	HOLDER-SENSOR;W9,PC HB,VIOLET
2		BP61-00052A	HOLDER-WIRE;PJTV,NYLON,66,NATURAL
2		BP64-00015C	CABINET-FRONT,BOT;DP,AA64-02732E,43T7 AS
2		BP73-00004A	RUBBER-CAP;42W5,SILICONE,WHT,RUBBER
2		BP96-00016J	ASSY COVER P-MASK;DP, AA64-02733G,43T7,A

ASSY COVER REAR

1		BP90-00010H	ASSY COVER REAR;SP43T7HFS/XEF,43T7
2	CBB+TBA	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR
2		AA63-60122J	SPACER-FELT;SPD-50P3H,FELT,L530,D20,T0.3
2		AA64-60449B	INLAY-COVER;SP-434JMF,PS,T0.5,149.3X69.5
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-
2		AA67-00205D	MIRROR-BACK;DP,43T7,SSM,795*569*554*(78)
2		BP61-00012A	BRACKET-MIRROR;DP,42W5,AA61-01123A,11.8K
2		BP64-00016A	CABINET-BACK,TOP;DP,43T7,AA64-02734A
2		BP64-00017B	CABINET-BACK,BOT;DP,43T7,AA64-02735B
2		BP64-00044A	INLAY-VENT;43T7,PS SHEET,T0.5

ASSY CHASSIS

Loc. No.		Code No.	Description ; Specification	Remark
1		BP91-00245S	ASSY CHASSIS;SP43T7HFS/XST,J54A,C2.0	
2		AA95-01841C	ASSY SUB-PCB,SENSOR;DP,PCL545R,P54A,AA95	
2		BP94-00238A	ASSY PCB MISC-VM;DP,HCM4215W3S/XAA,P55A	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0203-001269	TAPE-OPP MASKING;#301,T0.06,W75,L50000,N	
3		0204-000441	FLUX;JS95TVS,FLUX,20,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
3	RZ120	2008-001097	R-FUSIBLE(S);33OHM,5%,1/2W,AC,BK,2.5X6.5	
3		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
3		6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	
3		AA33-00017A	MAGNET CONVERGENCE;JH 92LT - 29G,-,29.1M	
3	CNZ101	AA39-20055C	LEAD CONNECTOR-ASSY;,6P,500,YBNH025-06,6	
3		AA69-00081A	PAD-PLATE;CB SW-2,YEL,510,310,-,-,K54A,-	
3		AA69-01834E	MASTER CARTON;,CB DW-3,YEL,520,350,390	
3		AA69-01907B	PAD-CROSS;,CB DW-2,YEL,340,70	
3		AA69-01907C	PAD-CROSS;,CB DW-2,YEL,510,70	
3	QZ102	AA96-00243L	ASSY H/S;-,CRT,AA62-000450A,2SC2344,HERC	
4		0205-000129	GREASE-SILICON;SC102,JAPAN	
4		0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	
4		AA62-00065A	HEAT SINK-PS;DP,-,-,-,AA62-00045A,-,-,-,	
3	QZ101	AA96-00243M	ASSY H/S;-,AMP,AA62-000450A,2SA1011,HERC	
4		0205-000129	GREASE-SILICON;SC102,JAPAN	
4		0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	
4		AA62-00065A	HEAT SINK-PS;DP,-,-,-,AA62-00045A,-,-,-,	
3	A	AA97-07230M	ASSY AUTO-VM;COMMANDO	
4	DZ106	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
4	DZ105	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
4	DZ102	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
4	DZ104	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	DZ103	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	DZ101	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	QZ103	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
4	QZ106	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	RZ122	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
4	RZ109	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ102	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ101	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ108	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ118	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ117	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ107	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ116	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ119	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ121	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ115	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ110	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RZ104	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
4	RZ105	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	RZ106	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	RZ114	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
4	RZ103	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
4	RZ111	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
4	RZ123	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
4	RZ113	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
4	RZ112	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
4	RFZ101	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
4	CZ106	2201-000193	C-CERAMIC,DISC;0.01NF,0.25PF,50V,C0G,TP,	
4	CZ104	2201-000193	C-CERAMIC,DISC;0.01NF,0.25PF,50V,C0G,TP,	
4	CZ105	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
4	CZ103	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
4	CZ110	2201-000604	C-CERAMIC,DISC;0.056NF,+100-0%,500V,SL,T	
4	CZ111	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
4	CZ112	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
4	CZ102	2401-001157	C-AL;33uF,20%,160V,GP,TP,12.5x20,5	
4	CZ108	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
4	CZ109	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
4	CZ101	2401-001495	C-AL;47uF,20%,16V,GP,TP,5x11,5	
4	CZ107	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
4	LZ101	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
4	CNZ104	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
4	CNZ103	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
4	CNZ102	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
4	JZ102	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
4	JZ101	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
4	PCB	AA41-00611A	PCB-VM;HCM4215W,FR-1,1L,A,1.6T,245X245,P	
2		BP94-00239A	ASSY PCB MISC-DY-JACK;DP,HCM4215W3S/XAA,	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0203-001269	TAPE-OPP MASKING;#301,T0.06,W75,L50000,N	
3		0204-000441	FLUX;JS95TVS,FLUX,20,-	
3		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
3	GT13	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	
3	GT09	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	
3	GT05	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	
3	GT01	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	
3		AA61-01197A	HOLDER-PCB,DY;COMANDO,ABS V0,BLK	
3		AA69-01367X	PAD-PLATE;,CB SW-2,YEL,560,330	
3		AA69-01834H	MASTER CARTON;,CB DW-3,YEL,570,340,390	
3		AA69-01907H	PAD-CROSS;,CB DW-2,YEL,560,70	
3		AA69-01907J	PAD-CROSS;,CB DW-2,YEL,330,70	
3	A	AA97-07230N	ASSY AUTO;COMMANDO	
4	R301	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
4	R302	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
4	R303	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
4	PCB	AA41-00632A	PCB-DY CONNECTION;HCM4215W,FR-1,1L,A,1.6	
2		BP94-00252A	ASSY PCB CRT-PCB;DP,SP43T7HFS,J54,C2.0	
2		BP94-00328A	ASSY PCB MISC-CONTROL POWER;DP,SP43T7HPS	
2		BP94-00329A	ASSY PCB MISC-CONTROL SIDE;DP,SP43T7HPS/	
2		BP94-00353C	ASSY PCB MISC-SIDE A/V;DP, BP96-00011F,4	
2		BP94-00382A	ASSY PCB MISC-SUB AMP;DP,SP43T7HFS,J54A,	
2		BP94-00383A	ASSY PCB MISC-CG-AMP;DP,SP43T7HFS,J54A,C	
2		BP94-00442C	ASSY PCB MISC-SPK TERMINAL;DP, BP96-0003	

ASSY CPT

1		BP91-00490A	ASSY CPT;SP43T6HPS/SMA,J54A
2		BP91-00482A	ASSY PRT-PACK;SP43T6HPS/SMA,J54A

ASSY BOX

1		BP92-00010C	ASSY BOX;SP43T7HFS/XST,43T7
2		BP69-00021A	PACKING-COVER,BOT;43T7,H-3 AB,C3,YEL,965
2		BP69-00011B	PACKING CASE-OUT;43T7(TSE),H-3 AB,C3,,,,
2		AA68-01204B	LABEL BOX;DOMESTIC ,A/P,70,200,WHITE
2		AA02-00012A	TAPE ETC-RIBBON;-,-,-,54CM,250MT,-,-,-

ASSY P/MATERIAL

1		BP92-00011D	ASSY P/MATERIAL;SP43T7HPS/XST,43T7
2	BOX	0203-001100	TAPE-OPP MASKING;OPP/W75/CLR,T0.05,W75,L
2	ACCERY	0203-001269	TAPE-OPP MASKING;#301,T0.06,W75,L50000,N
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X
2		AA61-00049B	HOLDER-BOX;-,PP,-,-,-,NTR,V0,AA61-20285A
3		0203-001269	TAPE-OPP MASKING;#301,T0.06,W75,L50000,N
3		AA61-20285A	HOLDER-BOX;3456,PP,-,-,-,WHT,VO
3		AA69-10026X	PAD-PLATE;CB DW-2,YEL,550,360,-,-,-,-
3		AA69-40013C	MASTER CARTON;-,CB DW-3,-,560,370,275,YE
2		AA63-10007C	BAND-PP;W18,CLEA,1G
2		AA69-00744F	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1400,H1
2		AA69-01652A	CUSHION-SET;43T7,PS FOAMED,C=0.02

ASSY ACCESSORY

1	A	BP92-00409A	ASSY ACCESSORY;SP43T7HFS/XST,J54A,C2.0
2		4301-000120	BATTERY-MN;1.5V,-,AA,14.5x50mm,-
2		AA39-40001B	CABLE RCA;1500MM

Loc. No.	Code No.	Description ; Specification	Remark
2	AA68-02269A	CARD WARRANTY;DOMESTICS,COPY,W/P 120G,93	
2	AA69-30002A	BAG-SHEET;LDPE,T0.05,W240,L400,-,L-TYPE,	
2	BP59-00008A	REMOCON;,TM65A,COMMOANDO,J54A,49,L/GRAY,	
2	BP68-00025B	MANUAL USERS;SP43T7HFX/XST,,THI,,W/P100G	
2	BP68-00027A	MANUAL USERS;SP43T6HPX/SAP,ENG,W/P100G,J	
2	BP68-00051A	MANUAL-S/D;SP42W5HP,THA,W/P100G,J54A,A4	

Loc. No.	Code No.	Description ; Specification	Remark

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

3-2 SP62T8HCX/HAC

ASSY COVER FRONT

Loc. No.		Code No.	Description ; Specification	Remark
1	M0001	BP90-00149D	ASSY COVER FRONT;SP62T8HCX/XFA,J54A	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001315	SCREW-TAPTITE;BH,+,B,M4,L20,ZPC(YEL),SWR	S.N.A
..2	T0081	6003-001324	SCREW-TAPTITE;BH,+,B,M4,L16,NI PLT,SWRCH	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001004	SCREW-WOOD;HH,+,M4,L27,BLK,SWRCH18A	S.N.A
..2	HC+CW	6005-001005	SCREW-WOOD;HH,+,M4.0,L19,NI PLT,SWRCH18A	S.N.A
..2	B/C/M+	6006-001094	SCREW-ASSY WOOD;WW,HH,+,M7,L32,ZPC(YEL)	S.N.A
..2	T0118	AA26-00101A	TRANS FBT-H/V DISTRIBUTOR;FWZ50A001E/FFA	
..2		AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE 94HF	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2		AA61-00357B	HOLDER-MIRROR;PCJ612R,ABS,-,-,-,BLK,HB,L	S.N.A
..2	T0115	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-	
..2		AA61-00618C	GUIDE-FLOW;54J8,J7,ABS,IVORY,V0	S.N.A
..2		AA63-00386B	COVER-MIRROR,WOOD ASSY;62T6,PB12T+SHEET,	S.N.A
...3	HC+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3		AA61-00357C	HOLDER-MIRROR;PCJ612R,ABS,-,-,-,BLK,HB,L	S.N.A
...3		AA63-00387B	COVER-MIRROR,WOOD;62T6,PB12T+SHEET	S.N.A
..2	T0069	AA63-60002V	SPACER-FELT;-,FELT,-,-,-,BLK,T0.3,-,60X4	S.N.A
..2	T0069	AA63-60131A	SPACER-FELT;SVP403J,FELT,-,-,-,BLK,T0.5,	S.N.A
..2	CFB	AA65-00011C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
..2		AA65-00016A	CLAMPER CORE-CABLE;PJTV,NYLON,NTR,6/6	S.N.A
..2	T0053	AA67-00117B	SCREEN FRESNEL;62,1283*973,T2	
..2	T0110	AA67-00131A	SUN SCREEN-AG;62J8,1283*973*,T=82%,G=110	
..2	T0056	AA67-00201A	SCREEN-TINT;62,1281*971,T=0.7,P	
..2	T0102	BP73-00004A	RUBBER-CAP;42W5,SILICONE,WHT,RUBBER	
..2	T0269	BP96-00232A	ASSY MISC P-DOOR RACK;54T8,MOLD+GLASS+BR	
...3	T0081	6003-001323	SCREW-TAPTITE;BH,+,B,M4,L12,NI PLT,SWRCH	S.N.A
...3	T0081	6003-001374	SCREW-TAPTITE;FH,+,B,M4,L12,NI PLT,SWRCH	
...3		AA61-01116A	BRACKET-HINGE;55W9,SECC,T2.0	S.N.A
...3		BP61-00181A	BRACKET-DOOR,RACK;54T8,SECC,T1.0	S.N.A
...3	CIS1	BP64-00154A	CABINET-DOOR,RACK;54T8,HIPS,HB,GRAY	
...3		BP64-00208A	WINDOW-DOOR RACK;54T8,GLASS,T3.0,,,,BR,	S.N.A
..2		BP96-00290A	ASSY COVER P-WOOD;62T8,WOOD,SDE8336R(SIL	S.N.A
...3	T0082	3001-000153	SPEAKER;20W,8ohm,93dB,1.3KHz	
...3	T0082	3001-000176	SPEAKER;30W,8OHM,93DB,65HZ	
...3	HC+CW	6005-001004	SCREW-WOOD;HH,+,M4,L27,BLK,SWRCH18A	S.N.A
...3	T0076	AA39-00042C	LEAD CONNECTOR-ASSY;,1.75UF,350MM,REC,RE	
...3	T0076	AA39-00284B	LEAD CONNECTOR-ASSY;SVP-55W3HD,UL2547#26	
...3	HC+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3	HC+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3	HC+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3	HC+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3	HC+CW	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,-,-	S.N.A
...3		AA61-00094C	HOLDER-RAIL;PCJ533R,ABS,-,-,-,BLK,HB,480	S.N.A
...3		AA61-00097A	HOLDER-WIRE;-,NYLON 6/6,-,-,-,NTR,-	S.N.A
...3		AA61-00458B	CASTER;-,TP4020-05 PLY,-,OH56,-,-,SR44.4	S.N.A
...3		AA61-00506B	HOLDER-CRT,MAIN;43,54,62J8,HIPS,-,-,-,BL	S.N.A
...3		AA61-00507B	HOLDER-CABINET,WOOD;43,54,62J8,ABS,-,-,-	S.N.A
...3		AA61-00508D	HOLDER-JERSEY;W3,ABS V0,GRAY,G4309	S.N.A
...3		AA61-00550B	HOLDER-PLATE,MIRROR;43,53,62J8,ABS,-,-,-	S.N.A
...3		AA61-00556B	HOLDER-PLATE,MIRROR;43,53,62J8,ABS,-,-,-	S.N.A
...3		AA61-00858C	BRACKET-FRAME;,SECC,T2.0,NO-R PJTV	S.N.A
...3	T0245	AA61-00864A	HOLDER-PCB;W3,HIPS,V0,BLK	S.N.A
...3		AA61-01115A	HOLDER-VENT;55W9,HIPS HB,BLK	S.N.A
...3		AA63-00348B	COVER-DUCT;54,62J8,HIPS,-,-,-,HB,BLK,-	S.N.A
...3		AA64-02536A	CABINET-HANDLE,WOOD;47H1,HIPS HB,G4309,S	S.N.A
...3		AA64-02859A	CABINET-BOSS,RACK;55W9,HIPS,HB,NTR	S.N.A
...3		AA65-00017A	CLAMPER CORE-WIRE;ALL MODEL,NYLON6.6,BLK	S.N.A
...3		AA98-00049B	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505	S.N.A
....4	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3		BP61-00075A	HOLDER-JERSEY,ASSY;W3,ABS V0,GRAY,63-000	S.N.A
....4	T0069	AA63-00099C	SPACER-FELT;47W3,FELT,BLK,T0.35,30*30	S.N.A
....4		AA61-00508D	HOLDER-JERSEY;W3,ABS V0,GRAY,G4309	S.N.A
...3		BP61-00204A	HOLDER-SENSOR;62T8,PC BLK,,,,,	S.N.A
...3		BP61-00205A	HOLDER-SCREEN;62T8,ABS HB BLK,,,,,	S.N.A
...3		BP64-00246A	CABINET-WOOD;62T8,WOOD,SILVER(SDE8336R),	S.N.A
...3		AA60-00078A	SPACER-DUAL,LOCK;54J8,#250,-,-,-,-,-,-4	S.N.A
...3		BP61-00205B	HOLDER-SCREEN S;ABS,62T8,HB,BLK	S.N.A
..2	T0076	BP96-00291C	ASSY COVER P-FRONT MASK;62T8,HIPS,HB,G43	
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0018	BP64-00191B	CABINET-MASK BOT;62T8,HIPS,HB,G4309,SV01	S.N.A
...3		BP64-00191E	CABINET-MASK TOP;62T8,HIPS,HB,G4309,SV01	S.N.A
...3		BP64-00192A	CABINET-MASK SIDE;62T8,HIPS HB G4309,SV0	S.N.A
...3	T0102	BP73-00004A	RUBBER-CAP;42W5,SILICONE,WHT,RUBBER	
..2	T0071	BP96-00292C	ASSY COVER P-FRONT BOT;62T8,HIPS,HB,G430	
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	CIS7	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	S.N.A
...3		BP60-00004A	SPACER-BUMPON;55W9,RUBBER,5MM	S.N.A
...3		BP60-00017A	SPACER-DUAL.LOCK;62T6,#400,BLK,19*40	S.N.A
...3		BP61-00027A	BRACKET-FRONT;PTH5498,SECC,T1.0	S.N.A
...3		BP61-00108A	GUIDE-KONB,CONTROL;42W4,G3676,42W4,ABS H	S.N.A
...3		BP64-00078A	WINDOW REMOCON-LED;42W4,PC,42W4,PC,CLEAR	N.A
...3	T0022	BP64-00165A	KNOB CONTROL;54T8,ABS,HB,GRAY,G3676	
...3	T0023	BP64-00166A	KNOB POWER;54T8,ABS,HB,GRAY,G3676	
...3	T0057	BP64-00178A	BADGE-BRAND;ALL,AL,T1.5,78,13.0,,BLK,SIL	S.N.A
...3	T0002	BP64-00194A	CABINET-FRONT BOT;62T8,HIPS HB GRY,SV012	S.N.A
..2	T0067	AA60-00069G	SPACER-SCREEN;43,53,61J8,ABS,-,-,-,BLK,-	S.N.A

ASSY COVER REAR

1	M0002	BP90-00162D	ASSY COVER REAR;SP62T8HCX/HAC,J54A	S.N.A
..2	T0112	AA64-01380B	CABINET-BACK,TOP;61J8,HIPS,-,-,-,HB,BLK,	
..2	T0112	AA64-02266B	CABINET-BACK,BOT;PJTV,HIPS,HB,BLK,P55A	
...3		0103-000161	RESIN-HIPS;BASFK456M,BLK,-,V0	S.N.A
..2	CBT	AA64-60449B	INLAY-COVER;SP-434JMF,PS,T0.5,149.3X69.5	S.N.A
..2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	S.N.A
..2	T0108	AA67-00081A	MIRROR-BACK;62J8,GLASS,1187*725*830,T3.0	
..2		BP64-00193A	CABINET-BACK SIDE;62T8,HIPS HB BLK,,,,,,	S.N.A

ASSY FIXING

1		BP91-00807G	ASSY FIXING;J54A,CP2/ AA96-20109F	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0076	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
..2	T0070	AA61-01127A	HOLDER-CHASSIS;COMMANDO,HIPS V0,G4309	S.N.A
..2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	S.N.A
..2		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
..2		AA65-30111A	CLAMPER CORE-WIRE;ALL MODEL,NYLON,V0,-,W	S.N.A
⚠ ..2	T0066	AA96-20109F	ASSY POWER CORD;-,CP2/NO(4.0),H/C 150mm,	S.N.A
...3		3811-000401	WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22	S.N.A
...3	T0077	AA39-10006X	CBF POWER CORD;-,KKP419C,KLCE-2F,2.286MT	
...3		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	S.N.A
..2		BP39-00036A	LEAD CONNECTOR;J54A/SP42W5HP,UL2547#26,U	

ASSY PRT

1		BP91-00809P	ASSY PRT;SP62T8HFX/XSA,J54A	S.N.A

Loc. No.		Code No.	Description ; Specification	Remark
..2	T0026	BP91-00819C	ASSY CPT-R;SP55W3HCX/FES,J54A	
...3		AA03-00307A	CRT MONO;P16QDU11RJA(S),FREE,0.78MH,7.0M	S.N.A
...3	T0117	AA26-30006F	TRANS FBT-ANODE CAP ASSY;-,FWZ-50A001C,	
...3	T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3	T0079	AA33-00016A	MAGNET CONVERGENCE;JH 92LT - 29F,-,29.1M	
...3	T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3		AA61-00806B	CASE-COUPLER,R;PROJ,ALDC,T8,BLK	S.N.A
...3		AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3		AA63-00076B	SPACER-LENS;FELT,W7,BLK,T0.8	S.N.A
...3	T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
....4	T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
....4		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
....4		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3	T0051	BP67-00055A	LENS;LENS,PRO 50 RED C ELEMENT	S.N.A
...3	T0298	BP67-00055D	LENS-PLATE;,PRO 50 SHAING PLATE	S.N.A
...3	T0109	BP67-00058A	LENS-ASSY;,PRO 50-60 GREEN/RED	S.N.A
..2	T0027	BP91-00819D	ASSY CPT-G;SP55W3HCX/FES,J54A	
...3		AA03-00308A	CRT MONO;P16QDU11GHA(S),FREE,0.78MH,7.0M	S.N.A
...3	T0117	AA26-30006F	TRANS FBT-ANODE CAP ASSY;-,FWZ-50A001C,	
...3	T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3	T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3		AA61-00807B	CASE-COUPLER,G;PROJ,ALDC,T8,BLK	S.N.A
...3		AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3		AA63-00076B	SPACER-LENS;FELT,W7,BLK,T0.8	S.N.A
...3	T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
....4	T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
....4		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
....4		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3	T0051	BP67-00055B	LENS;LENS PRO 50,GREEN C ELEMENT	S.N.A
...3	T0298	BP67-00055D	LENS-PLATE;,PRO 50 SHAING PLATE	S.N.A
...3	T0109	BP67-00058A	LENS-ASSY;,PRO 50-60 GREEN/RED	S.N.A
..2	T0028	BP91-00819E	ASSY CPT-B;SP55W3HCX/FES,J54A	
...3		AA03-00309A	CRT MONO;P16QDU11BEA(S),FREE,0.78MH,7.0M	S.N.A
...3	T0117	AA26-30006F	TRANS FBT-ANODE CAP ASSY;-,FWZ-50A001C,	
...3	T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3	T0079	AA33-00018A	MAGNET CONVERGENCE;JH 92LT - 36F,-,29.1M	
...3	T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3		AA61-00808B	CASE-COUPLER,B;PROJ,ALDC,T8,BLK	S.N.A
...3		AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3		AA63-00076B	SPACER-LENS;FELT,W7,BLK,T0.8	S.N.A
...3	T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
....4	T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
....4		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
....4		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3	T0051	BP67-00055C	LENS;LENS PRO 50,CLEAR C ELEMENT	S.N.A
...3	T0298	BP67-00055D	LENS-PLATE;,PRO 50 SHAING PLATE	S.N.A
...3	T0109	BP67-00058B	LENS-ASSY;,PRO 50-60 BLUE	S.N.A

ASSY CHASSIS

1	M0017	BP91-00915P	ASSY CHASSIS;SP62T8HCX/HAC,J54A,IRAN	S.N.A
..2	T0098	AA94-08268A	ASSY PCB MISC-VM;COMMANDO	

Loc. No.		Code No.	Description ; Specification	Remark
...3	RZ120	2008-001097	R-FUSIBLE(S);33OHM,5%,1/2W,AC,BK,2.5X6.5	
...3		AA97-07230M	ASSY AUTO-VM;COMMANDO	S.N.A
....4	DZ106	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	DZ105	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	DZ102	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	QZ103	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	QZ106	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	RZ122	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4	R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RZ110	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ104	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ105	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ106	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ114	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
....4	RZ103	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4	RZ111	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4	RZ123	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4	RZ113	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4	RZ112	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4	RFZ101	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
....4	C598	2201-000193	C-CERAMIC,DISC;0.01NF,0.25PF,50V,C0G,TP,	
....4	C598	2201-000193	C-CERAMIC,DISC;0.01NF,0.25PF,50V,C0G,TP,	
....4	C598	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
....4	C598	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
....4	C598	2201-000604	C-CERAMIC,DISC;0.056NF,+100-0%,500V,SL,T	
....4	C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4	C701	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4	C701	2401-001157	C-AL;33uF,20%,160V,GP,TP,12.5x20,5	
....4	C701	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4	C701	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4	C701	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
....4	C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4	LZ101	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
....4	CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	PCB	AA41-00611A	PCB-VM;HCM4215W,FR-1,1L,A,1.6T,245X245,P	S.N.A
...3	QZ101	AA96-00243M	ASSY H/S;-,AMP,AA62-000450A,2SA1011,HERC	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
....4	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4		AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
...3	QZ102	AA96-00243L	ASSY H/S;-,CRT,AA62-000450A,2SC2344,HERC	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
....4	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4		AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	T0079	AA33-00017A	MAGNET CONVERGENCE;JH 92LT - 29G,-,29.1M	
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0076	AA39-20055C	LEAD CONNECTOR-ASSY;,6P,500,YBNH025-06,6	
..2	T0105	AA94-08270A	ASSY PCB MISC-DY JACK;COMMANDO	
...3		AA97-07230N	ASSY AUTO;COMMANDO	S.N.A
....4	R301	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4	R302	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4	R303	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4	PCB	AA41-00632A	PCB-DY CONNECTION;HCM4215W,FR-1,1L,A,1.6	S.N.A
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	GT01	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3	GT05	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3	GT09	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
...3 GT13	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3	AA61-01197A	HOLDER-PCB,DY;COMANDO,ABS V0,BLK	S.N.A
..2 T0101	BP94-00134E	ASSY PCB MISC-SENSOR ASSY;SENSOR	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	
...3	BP97-00208A	ASSY SMD;0	S.N.A
....4 Q01	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
....4 PCB	AA41-00853A	PCB-SERSOR;SVP-42W5HRC,FR-4,2L,A,1.6T,24	S.N.A
....4 D01	BP32-00001A	SENSOR PHOTO;BCS5030G1,-40 TO +85,0.42 U	
....4 R01	2007-000305	R-CHIP;10Mohm,5%,1/10W,TP,1608	
....4 R02	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
....4 R03	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
....4	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
..2 CIS	BP94-00220A	ASSY PCB MISC-MASTER S/W;SVP-55W9HRTC,P5	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 SWP01	3403-001130	SWITCH-PUSH;250VAC,5A,SPST,OFF-ON-OFF,-	
...3 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
...3	AA61-00719B	HOLDER-MASTER;T6,W3,HIPS V0,BLK,J52A	S.N.A
...3	BP97-00134A	ASSY AUTO-MASTER S/W;SVP-55W9HRTC,P55A	S.N.A
....4 PCB	AA41-00784A	PCB-POWER S/W;SVP-55W9HRTC,CEM-1,1L,A,1.	S.N.A
....4 EY02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 GT01	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT02	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
...3 CNW01	BP39-00048A	LEAD CONNECTOR;P55A/SVP-47W3HRT,UL1617#2	
..2	BP94-00260A	ASSY PCB CRT-PCB;SP62T6HCX/TAW,J54A,C2.0	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 VR561	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 VR531	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 VR501	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3 V561	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 V531	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 V501	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
...3 CN906	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
...3 CN906	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN906	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3 SG301	4715-001050	SURGE ABSORBER;2.4kV,20%,1500A,-,DISC-RA	
...3 SG562	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 SG532	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 T0076	AA39-00112A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,10	
...3 T0076	AA39-00120F	LEAD CONNECTOR-ASSY;SIR-T165,UL1007#26,U	
...3 T0076	AA39-00198A	LEAD CONNECTOR-ASSY;,3P,900/600MM,YFH800	
...3 T0076	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,400,YFH800-01,S,	
...3 T0076	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,400,YFH800-01,S,	
...3 T0076	AA39-20010E	LEAD CONNECTOR-ASSY;,1P,800,YFH800-01,S,	
...3 T0076	AA39-20010E	LEAD CONNECTOR-ASSY;,1P,800,YFH800-01,S,	
...3 T0076	AA39-20027D	LEAD CONNECTOR-ASSY;,6P,600,67096-006,S,	
...3 T0076	AA39-20031G	LEAD CONNECTOR-ASSY;,9P,800,67096-009,S,	
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3 Q371	AA96-00244H	ASSY H/S;SCREW,2SC4636(2),CRT,SLICON-OIL	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0090	0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00046A	HEAT SINK-PS;-,-,T1.0,-,D1(DREAM) 60X25X	S.N.A
...3 IC561	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
...3 IC531	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
...3 IC501	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
....4 T0074	1201-001131	IC-VIDEO AMP;6111,SIP,9P,-,SINGLE,-,PLAS	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	S.N.A
...3 T0076	BP39-00004B	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3 T0076	BP39-00004C	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3 T0076	BP39-00004C	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3 T0103	BP59-00005A	MODULE-FOCUS PACK ASSY;PJT TV,F301-P03A	
...3	BP97-00219A	ASSY AUTO;SP43T6HPX/SAP,J54A	S.N.A
....4 D510	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D509	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D504	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D372	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D361	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D362	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 D371	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 Q563	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q534	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q533	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q361	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q362	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L,	
....4 Q502	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R584	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R554	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R524	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R580	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R550	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R520	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R517	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R547	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R577	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R366	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R125	2001-000232	R-CARBON;1.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000319	R-CARBON;120KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R566	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R536	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R506	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R581	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R551	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R521	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R371	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R370	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R369A	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R367	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R368	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R369	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R567	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R537	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R507	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R381	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R361	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R372	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R373	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R374	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R377	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R375	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R365	2001-001120	R-CARBON(S);3.3OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R574	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R544	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R514	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R583	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R582	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R553	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R552	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R523	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R522	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R589	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R559	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R529	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R575	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R545	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R579	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R578	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R549	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R548	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R519	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R518	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R588	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R538	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R508	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R573	2008-000204	R-FUSIBLE(S);0.22ohm,10%,1/2W,AF,TP,2.5x	
....4 R543	2008-000204	R-FUSIBLE(S);0.22ohm,10%,1/2W,AF,TP,2.5x	
....4 R513	2008-000204	R-FUSIBLE(S);0.22ohm,10%,1/2W,AF,TP,2.5x	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4 C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4 C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4 C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4 C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4 C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4 C565	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C535	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C505	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C507	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C537	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C567	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C361	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 C701	2401-001621	C-AL;6.8uF,20%,450V,GP,TP,13x20,5	
....4 L531	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L561	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
....4 SG533	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG561	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG563	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG501	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG503	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG531	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 EL06	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EL03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EL563	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL537	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL536	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL535	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL564	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL565	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL566	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL567	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL534	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL02	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL04	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL05	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL533	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL505	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL504	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL503	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 GT537	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT536	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT535	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT534	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT533	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT561	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT568	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT567	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT564	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT563	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT562	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT532	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT375	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT374	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT373	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT372	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT371	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT501	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT531	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT506	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT504	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT503	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT502	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 R382	2002-001014	R-COMPOSITION;6.8Kohm,10%,1/2W,AA,TP,3.7	
....4 PCB	AA41-00600E	PCB-CRT;HCM4215W,FR-1,1L,E,1.6T,245X197(	S.N.A
....4 T0083	0402-000243	DIODE-RECTIFIER;RC2-V1,2000V,0.2A,DO-201	
..2 T0146	BP94-00301A	ASSY PCB MISC-SUB AMP;SP43T7HFX/XEF,J54A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 C701	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3 CN906	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
...3 T0076	AA39-20029D	LEAD CONNECTOR-ASSY;,7P,500,67096-007,S,	
...3 IC601	AA96-00623E	ASSY H/S;SCREW,MAIN,AA62-00056A,TDA7265,	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0124	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-00056A	HEAT SINK-PS;-,-,T1.0,-,41*35*70,D2,-,-	S.N.A
...3	BP97-00195A	ASSY AUTO;0	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS612	2001-001050	R-CARBON(S);1.5KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS624	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RS611	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RS609	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS608	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS607	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS606	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS605	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS604	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS603	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS602	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 CS613	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 CS614	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 CS612	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CS611	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CS610	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
....4 PCB	AA41-00614B	PCB-SUB AMP;SVP-47W3HRT,FR-1,1L,B,1.6T,2	S.N.A
....4 EL01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EL02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
..2 T0130	BP94-00370A	ASSY PCB MISC-SPK TERMINAL;SP43T7HFX/SAP	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 JA101	3716-001192	TERMINAL-BLOCK;-,6P,5MM,-,-	
...3 ESP+TB	6006-001095	SCREW-ASSY TAPT;WP,BH,+,M4,L12,ZPC(YEL)	S.N.A
...3 T0076	AA39-20052D	LEAD CONNECTOR-ASSY;,4P,700,YBNH025-04,Y	
...3 PCB	AA41-00811A	PCB-SPK TERMINAL;SP42W5HC,FR-1,1L,A,1.6T	S.N.A
...3 T0092	BP96-00038L	ASSY COVER P-TERMINAL,ANT;43T7HF,HIPS VO	
....4	AA64-02840B	INLAY-TERMINAL,PAL;42W5,COMMANDO,PS SHEES	N.A
....4	AA65-00023A	TERMINAL-BOARD,ANT;,HIPS V0,BLK	S.N.A
...3	AA61-20129A	HOLDER-WIRE;-,NYLON-66,-,-,-,NTR,DAFC-25	S.N.A
..2 T0146	BP94-00379A	ASSY PCB MISC-SUB;SP43T7HFX/SMA,J54A,FRE	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 T0083	0402-000236	DIODE-RECTIFIER;GI824,400V,5A,-,TP	
...3 T0083	0402-000250	DIODE-RECTIFIER;RG4C,1000V,1A,-	
...3 DZS801	0406-001007	DIODE-TVS;P6KE180A,171/180/189V,600W,CAS	
...3 T0090	0502-000405	TR-POWER;-,NPN,70W,TO-220,BK,10	
⚠ ...3 PC811S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
⚠ ...3 PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
...3 DU410	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV	
...3 IC012	1203-000162	IC-POSI.ADJUST REG.;317,TO-220,3P,-,PLAS	
...3 T0086	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
...3 T0123	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
...3 IC851	1203-001400	IC-POWER PRESCALER;SE110N,T0-220(SIP),3P	
...3 T0086	1203-002177	IC-PWM CONTROLLER;VIPER12ADIP,DIP,8P,300	
⚠ ...3 NT801S	1404-001195	THERMISTOR-NTC;5.1ohm,15%,2900,27mW/C,BK	
⚠ ...3 VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
...3 C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
...3 C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
...3 C598	2201-000987	C-CERAMIC,DISC;2.2NF,20%,400V,Y5U,TP,12.	
...3 C598	2201-000987	C-CERAMIC,DISC;2.2NF,20%,400V,Y5U,TP,12.	
...3 C814	2301-001041	C-FILM,PPF;15nF,5%,1.6KV,TP,29x14x21.5,2	
⚠ ...3 CR471S	2301-001091	C-FILM,MPPF;470nF,5%,400V,TP,26x21.5x14.	
⚠ ...3 CR430S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ ...3 CR431S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ ...3 CR436S	2306-000235	C-FILM,MPPF;560nF,5%,400V,TP,26*22.5*14,	
⚠ ...3 CX802S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
⚠ ...3 CX803S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
⚠ ...3 CR473S	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
...3 C491	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
⚠ ...3 CR474S	2306-000326	C-FILM,MPPF;4.7nF,5%,1.6KV,TP,28.5x16x9m	
...3 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
...3 C701	2401-000787	C-AL;220uF,20%,160V,GP,TP,16x31.5mm	
...3 C701	2401-001675	C-AL;820uF,20%,200V,GP,BK,25x50mm,1	
...3 C701	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM,7.5	

Loc. No.	Code No.	Description ; Specification	Remark
...3 C701	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM,7.5	
...3 C701	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM,7.5	
...3 C701	2401-003465	C-AL;680UF,20%,450V,GP,BK,35X60MM,22.5	
⚠ ...3 FP801S	3601-001007	FUSE-CARTRIDGE;250V,6.3A,TIME-LAG,GLASS,	
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
⚠ ...3 T432	AA26-00053A	TRANS;-,-,-,1.2mH,-,-,-,-,-,-,31.5KHZ,-,	
⚠ ...3 T481	AA26-00091A	TRANS-HV-STORAGE;4mH,-,14P,830uH,180V,10	
⚠ ...3 T444S	AA26-00100A	TRANS FBT;FFA97513L,CT29A7DR,0.3mH,-,-,-	
⚠ ...3 T431	AA26-50001U	TRANS-HORIZ.DRIVE;-,-,-,28mH,-,-,105uH,-	
⚠ ...3 T461	AA26-50001V	TRANS-HORIZ.DRIVE;-,-,-,6.0mH,-,-,113uH,	
...3 L432	AA27-00056A	COIL HORIZ. WIDTH;-,600uH,YL9N 15x27.5 C	
...3 L863	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L862	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L864	AA27-10002L	COIL CHOKE;-,24uH,K,-,2A,-,24UH-K,10x10m	
⚠ ...3 LR401S	AA27-30003M	COIL LINEARITY;-,5uH,OWA14x15,USRC0.1x60	
⚠ ...3 LX801S	AA29-30002L	FILTER LINE NOISE;-,10mHMIN,5A,AC90~260V	
⚠ ...3 LX802S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
⚠ ...3 LX803S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
...3 T0076	AA39-00180A	LEAD CONNECTOR-ASSY;,14P,100MM,YBNH250-1	
...3 GT01	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
⚠ ...3 D856	AA96-00243E	ASSY H/S;-,SOUND,AA62-00045A,FMG-G26S	S.N.A
⚠ ...3 D855	AA96-00243E	ASSY H/S;-,SOUND,AA62-00045A,FMG-G26S	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0083	0402-000231	DIODE-RECTIFIER;FMG-G26S,600V,4A,TO-220F	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-	S.N.A
...3 Q433	AA96-00243H	ASSY H/S;-,POWER,AA62-00045A,KSD73Y,C17A	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0090	0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,120	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-	S.N.A
⚠ ...3 IC831S	AA96-00275N	ASSY H/S;,AA62-00051A,STR-X6459,SP42WHP	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4 CIS	AA62-00051A	HEAT SINK-PS;-,-,-,SILVER,HOLE 31mm,ALL,	S.N.A
....4 IC063	BP13-00004A	IC HYBRID;STR-X6459A,COMMANDO,7,-20 TO +	
⚠ ...3 D811S	AA96-00276A	ASSY H/S;-,BRIDGE,AA62-00052A,RBV606,WAS	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0083	0402-000549	DIODE-BRIDGE;RBV606,600V,6A,-,BK	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA60-30003A	WASHER;T1.5,SBHG-1	S.N.A
....4	AA62-00052A	HEAT SINK-PS;-,-,-,SILVER,HOLE 18.5mm, 2	S.N.A
...3 IC421	AA96-00475B	ASSY H/S;SILICON-OIL,FMLG-12S(4),AA62-00	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0083	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
....4 IC012	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	S.N.A
...3 IC301	AA96-00623A	ASSY H/S;-,POWER,AA62-00056A,LA7845	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0088	1204-000517	IC-VERTICAL DEF.;LA7845,SIP,7P,-,PLASTIC	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-00056A	HEAT SINK-PS;-,-,T1.0,-,41*35*70,D2,-,-,	S.N.A
...3 Q431	BH99-00033H	ASSY HEAT/SINK;BH62-00038A,SPRING,FJL692	S.N.A
....4 T0083	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
....4 T0060	BH61-70003A	SPRING ETC;CVT4857,STS304-W1/2H,W3.8,-,L	S.N.A
....4 T0090	0502-001230	TR-POWER;FJL6920YDTU,N,200000MW,TO-264 F	
....4 CIS	BH62-00038B	HEAT SINK-FBT;COMMANDO,A1050S,T2.0,85*80	S.N.A
....4 CIS	BH73-00028A	SILICON/RUBBER-HS;CDT ALL,SILICON,26*33*	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
⚠ ...3 TS801S	BP26-00001A	TRANS SWITCHING-POWER;19B012,P55A,HCM421	
...3 T801S	BP26-00006A	TRANS SWITCHING;EER5345,P55A,HCM4215W,80	
...3 T0076	BP39-00014A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1007	
...3	BP39-00017A	LEAD CONNECTOR;P55A/HCM4215W,UL1617#22,U	
....4 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	BP97-00315A	ASSY AUTO-SUB;SP43T7HFX/SMA,J54A,FREE-VO	S.N.A
....4 D477	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D478	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D479	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 DR401S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 DR402S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D301	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D385	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D436	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D442	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D443	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DS804	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	

Loc. No.	Code No.	Description ; Specification	Remark
....4 DS802	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
....4 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 T0083	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-001286	DIODE-RECTIFIER;RP1H,2000V,.1A,-,TP	
....4 T0083	0402-001443	DIODE-RECTIFIER;EGP20K,800V,2A,DO-15,TP	
....4 DZ016	0403-000704	DIODE-ZENER;TZP7.5B,7.5V,7.5-8.4V,1W,DO-	
....4 DZ016	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
....4 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4 DZ016	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
....4 DZ016	0403-001167	DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	
....4 DZ016	0403-001167	DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	
....4 DZ016	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
....4 DZ016	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
....4 DZ016	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
....4 DZ016	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
....4 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ016	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
....4 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DZ016	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
....4 DZ016	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
....4 DS805	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
⚠ 4 QR401S	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q482	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q432	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q461	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q471	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q474	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q481	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q851	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QS801	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QS802	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q301	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q381	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q382	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q401	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q451	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q421	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q402	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 IC012	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
⚠ 4 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
....4 R811	2001-000002	R-CARBON(S);200KOHM,5%,1/2W,AA,TP,6.4X2.	
....4 R812	2001-000002	R-CARBON(S);200KOHM,5%,1/2W,AA,TP,6.4X2.	
....4 R125	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
....4 R125	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R308	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4 R470	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R422	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R836	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R496	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS808	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS804	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R855	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS803	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R439	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R438	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R834	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000745	R-CARBON;4.7OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS807	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
⚠ 4 RR401S	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R854	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R839	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R413	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R497	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R434	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R408	2001-001103	R-CARBON(S);20KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R837	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS802	2001-001124	R-CARBON(S);3.9OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R431	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R410	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS806	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R459	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R851	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP,2.4X6.	
⚠ 4 RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 4 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
....4 R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R425	2003-000417	R-METAL OXIDE(S);1.2Kohm,5%,3W,AA,TP,6x1	
....4 R832	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
....4 R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R429	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R801	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4 R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
....4 R310	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
....4 R460	2003-002044	R-METAL OXIDE(S);100ohm,5%,1W,AF,TP,2.5x	
....4 R427A	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
....4 R427	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
....4 R426	2003-002153	R-METAL OXIDE;4.7OHM,5%,2W,AG,TP,6X16MM	
....4 R443A	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
....4 R443	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
....4 R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP,4.3X12	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R421	2003-002159	R-METAL OXIDE;150OHM,5%,1W,AG,TP,4.3X12M	
....4 R466	2004-000531	R-METAL;20Kohm,1%,1/2W,AA,TP,3.3x9mm	
....4 R024	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R024	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R024	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R024	2004-001408	R-METAL(S);91Kohm,1%,1/2W,AA,TP,2.4x6.4m	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
....4 R024	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
....4 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R024	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-004029	R-METAL(S);10Kohm,1%,1/2W,AA,TP,2.5x6.5m	
....4 R024	2004-004029	R-METAL(S);10Kohm,1%,1/2W,AA,TP,2.5x6.5m	
....4 R024	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
....4 R465	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R449	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R447	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R445	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R442A	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R442	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R441	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R440	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
....4 R424	2008-000289	R-FUSIBLE(S);1ohm,5%,1W,AA,TP,3.9x10mm	
....4 R306	2008-000290	R-FUSIBLE(S);2.4ohm,5%,2W,AF,TP,3.9x10mm	
....4 R307	2008-000290	R-FUSIBLE(S);2.4ohm,5%,2W,AF,TP,3.9x10mm	
....4 R486	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
....4 R838	2008-001053	R-FUSIBLE;22ohm,5%,1/2W,AF,TP,2.5x6.5mm	
....4 R437	2008-001087	R-FUSIBLE(S);1.8ohm,5%,2W,AG,TP,3.9x12mm	
....4 R485	2008-001137	R-FUSIBLE(S);3.3ohm,5%,1W,AF,TP,3.9x10mm	
....4 R462	2008-001145	R-FUSIBLE;4.7OHM,5%,1/2W,AF,TP,2.5X6.5MM	
....4 R833	2009-001096	R-METAL PLATE;0.07ohm,5%,5W,CL,BK,5x14x1	
....4 R405	2009-001109	R-TEMPERATURE;240ohm,5%,1/4W,AA,TP,2.3x6	
....4 RR471S	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
....4 RR402S	2103-001086	VR-SEMI;100KOHM,25%,0.3W,TOP	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000146	C-CERAMIC,DISC;0.1NF,5%,50V,SL,TP,5X3.5M	
....4 C598	2201-000146	C-CERAMIC,DISC;0.1NF,5%,50V,SL,TP,5X3.5M	
....4 C598	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
....4 C598	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
....4 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
....4 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
....4 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000370	C-CERAMIC,DISC;0.22NF,10%,50V,Y5P,TP,4X3	
....4 C598	2201-000406	C-CERAMIC,DISC;0.27NF,10%,2KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000558	C-CERAMIC,DISC;0.47NF,10%,50V,Y5P,TP,5X3	
....4 C598	2201-000991	C-CERAMIC,DISC;0.56NF,10%,2KV,Y5P,TP,7.5	
....4 C478	2301-000020	C-FILM,PEF;27nF,5%,100V,TP,7.3x4x12.5mm,	
....4 C479	2301-000200	C-FILM,PEF;2.2nF,5%,200V,TP,11.0x6.0x9.0	
....4 C477	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
....4 CS801	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
....4 C493	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
....4 C412	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C831	2301-001216	C-FILM,PPF;47nF,5%,630V,TP,20x14.5x22,7.	
....4 C432	2303-000002	C-FILM,PPF;8.2nF 5% 400V TP 19X18X7,7.5m	
....4 C438	2303-000002	C-FILM,PPF;8.2nF 5% 400V TP 19X18X7,7.5m	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C460	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7,7.	
....4 C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C487	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
....4 C309	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
....4 C871	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
....4 C865	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4 C303	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4 C301	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4 C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
....4 C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C428	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
....4 C701	2401-000164	C-AL;1000uF,20%,25V,WT,TP,12.5x20,5	
....4 C701	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
....4 C701	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
....4 C701	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000698	C-AL;2200uF,20%,16V,WT,TP,12.5x25,5	
....4 C701	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
....4 C701	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
....4 C701	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
....4 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
....4 C701	2401-001486	C-AL;47uF,20%,160V,HR,TP,13x20mm,5m	
....4 C701	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
....4 C701	2401-001622	C-AL;6.8uF,20%,50V,BP,TP,16x25mm,7.	
....4 C701	2401-001625	C-AL;6.8uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-001655	C-AL;680uF,20%,25V,GP,TP,10x20,5	
....4 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-002211	C-AL;1000uF,20%,35V,LZ,TP,13x25mm,5	
....4 C701	2401-002216	C-AL;2200uF,20%,35V,GP,TP,16x25,7.5	
....4 C701	2401-002216	C-AL;2200uF,20%,35V,GP,TP,16x25,7.5	
....4 C701	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
....4 C701	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
....4 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-003114	C-AL;4.7uF,20%,250V,WT,TP,10x16,5	
....4 J152	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
....4 J130	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
....4 L431	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
....4 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
⚠ 4 FD801S	3601-000120	FUSE-AXIAL LEAD;125V,2.5A,FAST-ACTING,GL	
⚠ 4 FD871S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FD854S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FD805S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FD855S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
⚠ 4 FD802S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
....4 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	

Loc. No.	Code No.	Description ; Specification	Remark
....4 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
....4 EY52	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY53	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY54	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY55	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY51	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY42	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY41	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY40	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY63	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY62	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY61	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY60	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY59	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY58	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY57	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY56	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL08	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL07	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL06	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL05	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL04	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL03	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL02	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY39	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL16	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL15	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL14	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL10	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL11	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL12	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL13	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY38	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY37	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY36	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY67	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY66	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY65	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY64	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY50	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY49	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY35	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY25	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY24	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY23	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY22	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY21	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY20	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY19	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY34	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY31	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY30	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY29	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY28	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY27	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY26	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY70	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY92	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY91	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY90	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY89	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY88	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY87	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY86	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY99	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY98	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY97	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY96	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY95	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY94	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY93	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY85	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY77	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY76	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY75	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY74	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 EY73	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY72	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY71	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY84	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY83	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY82	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY81	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY80	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY79	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY78	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY18	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY119	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY118	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY117	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY116	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY115	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY114	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY113	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY126	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY125	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY124	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY123	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY122	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY120	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY12	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY11	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY102	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY101	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY100	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY10	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY08	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY109	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY108	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY107	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY106	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY105	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY104	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY103	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY127	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY150	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY15	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY149	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY148	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY147	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY142	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY141	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY17	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY16	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY155	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY154	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY153	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY152	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY151	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY140	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY133	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY132	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY131	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY130	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY13	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY129	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY128	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY14	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY139	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY138	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY137	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY134	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY135	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY136	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 GT433	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT805	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT806	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT810	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT811	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 GT404	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT14	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT15	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT16	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT17	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT33	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT34	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT35	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 R831	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
....4 C701	2401-001190	C-AL;330uF,20%,50V,GP,TP,10x20mm,5m	
⚠ 4 RS801S	3601-000102	FUSE-AXIAL LEAD;125V,1A,FAST-ACTING,GLAS	
....4 PCB	AA41-00824C	PCB-SUB;SP42W5HC,CEM-1,1L,B,1.6T,330X245	S.N.A
....4 Q409	0505-001723	FET-SILICON;FQP630TSTU,N,200V,9A,0.4OHM,	
....4 Q409	0505-001723	FET-SILICON;FQP630TSTU,N,200V,9A,0.4OHM,	
....4 C838	2305-000411	C-FILM,MPEF;470nF,5%,50V,TP,7.3x4.8x5.5m	
....4 C598	2201-000138	C-CERAMIC,DISC;0.1NF,10%,50V,Y5P,TP,4X4M	
....4 R024	2004-005051	R-METAL(S);2.2KOHM,1%,1/2W,AA,TP,2.4X6.4	
...3	AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3	AA65-00011B	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3 R384	2002-001079	R-COMPOSITION;470Kohm,5%,1/2W,AA,TP,4x10	
...3 C832	2301-001418	C-FILM,MPPF;1.5nF,5%,2kV,TP,29x7x13.5mm,	
...3 Q473	BP96-00006B	ASSY HEAT SINK P;HS,SCREW,IRF640B,2SC412	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 T0090	0502-001100	TR-POWER;2SC4125,NPN,70W,TO-3PML,BK,8-	
....4 Q409	0505-001722	FET-SILICON;IRFS640B,N,200V,18A,0.18OHM,	
....4 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4 CIS	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
....4 CIS	BP62-00001A	HEAT SINK;COMMANDO,A1050P,T2.0,W62.0,H50	S.N.A
..2 T0094	BP94-00392A	ASSY PCB MISC-CG AMP;ST43T8HF,J54A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003046	CONNECTOR-HEADER;BOX,9P,1R,2.5MM,STRAIGH	
...3	AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3 T0076	BP39-00005A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL2547	
...3 T0076	BP39-00015A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1185	
...3	BP61-00076A	HOLDER-PUSH,A;42W5,NYLON6.6,NATURAL	S.N.A
...3	BP61-00077A	HOLDER-PUSH,B;42W5,NYLON6.6,NATURAL	S.N.A
...3 CZ101	BP96-00005A	ASSY HEAT SINK P;BP62-00002A,SCREW,STK39	S.N.A
....4 T0081	6003-001021	SCREW-TAPTITE;RH,+,B,M3,L15,ZPC(YEL),SWR	S.N.A
....4 CIS	BP62-00002A	HEAT SINK;COMMANDO,A1050P,T2.0,W62.0,H14	S.N.A
....4 CIS	BP62-00008A	HEAT SINK;COMMANDO CG AMP,AL6063,T2.0,W1	S.N.A
....4 CIS	BP73-00002A	SILICON/RUBBER;COMMANDO CG AMP,SILICON ,	S.N.A
....4 T0074	1201-001225	IC-VIDEO AMP;392,SIP,22P,-,TRIPLE,-,PLAS	
...3	BP97-00380A	ASSY AUTO;0	S.N.A
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ109	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ108	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ107	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ106	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ105	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ104	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R857	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RZ142	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ143	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ144	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ145	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ146	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ147	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ123	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ124	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ125	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ128	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ127	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ126	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ132	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ132A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ148	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ148A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ129	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ129A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RFZ50	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ51	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ52	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ53	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ19	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ20	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ21	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ22	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 CZ114	2202-000561	C-CERAMIC,MLC-RADIAL;0.68NF,5%,50V,C0G,T	
....4 CZ113	2202-000561	C-CERAMIC,MLC-RADIAL;0.68NF,5%,50V,C0G,T	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C701	2401-000183	C-AL;1000uF,20%,35V,WT,TP,12.5x25,5	
....4 C701	2401-000183	C-AL;1000uF,20%,35V,WT,TP,12.5x25,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 LZ112	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ111	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ110	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ109	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ108	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ107	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
⚠ 4 FD101S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FD102S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
....4 ELZ01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 ELZ02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 ELZ03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 0	AA41-00601C	PCB;HCM4215W,PCB,CEM-1,1L,C,1.6,245X245,	S.N.A
....4 SGZ101	4715-000106	SURGE ABSORBER;300V,210-390V,-,-,AXIAL	S.N.A
..2 T0073	BP94-00445A	ASSY PCB MAIN;SP43T6HCX/FES,J54A,C2.0	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 IC802	1203-000119	IC-NEGA.FIXED REG.;7905,TO-220,3P,-,PLAS	
...3 IC012	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	

Loc. No.	Code No.	Description ; Specification	Remark
...3 C701	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3 C701	2401-001068	C-AL;3300uF,20%,50V,GP,BK,22x40,10	
...3 CN902	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
...3 CN902	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
...3 CN902	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
...3 CN902	3703-001187	CONNECTOR-BACK PANEL;64P,2R,FEMALE,STRAI	
...3 CN906	3711-003046	CONNECTOR-HEADER;BOX,9P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3 CN906	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
...3 CN906	3711-004946	CONNECTOR-HEADER;BOX,15P,1R,2.5MM,STRAIG	
...3 JA702	3722-000183	JACK-SCART;21P,4mm,SN,BLK,NO	
...3 JA703	3722-001163	JACK-VHS;4P,12mm,AU,BLK,N	
...3 JA701	3722-001426	JACK-PIN;9P,3.4mm,NI,BLK,-	
...3 JA704	3722-001754	JACK-PIN;5P(10P),-,NI,GRN/BLU/RED/WHT/RE	
...3 JA705	3722-001802	JACK-PIN;2P,8.3PI,NI,WHT/RED,-	
...3 L802	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L801	AA29-00004A	FILTER LINE NOISE;-,20UH,3A,AC80-260V,TQ	
...3	AA39-30007A	CBF IF;-,T,100mm,1365#26	
...3 TU03	AA40-00083A	TUNER;TCLS3101PD16A(S),PAL B/G,D/K,I,M,1	
...3 TU02	AA40-00084A	TUNER;TCPS3000PC16B(S),PAL ,181CH,38.9MH	
...3 MICOM	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 CG	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 CG	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 MICOM	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 PROSCA	AA63-00608A	SHIELD CASE;HERCULES TOP,SPTE,T0.5,W140.	S.N.A
...3 PROSCA	AA63-00610A	SHIELD CASE;COMMANDO,SPTE,T0.5,W141.5,H1	S.N.A
...3 IC801	AA96-00475C	ASSY H/S;SILICON-OIL,KA278R09,KA7808,AA6	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0087	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
....4 T0123	1203-002003	IC-VOLTAGE REGULATOR;278R09,TO-220,4P,-,	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	S.N.A
....4 T0123	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
...3 IC601	AA96-00623E	ASSY H/S;SCREW,MAIN,AA62-00056A,TDA7265,	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0124	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-00056A	HEAT SINK-PS;-,-,T1.0,-,41*35*70,D2,-,-,	S.N.A
...3 T0104	BP95-00058C	ASSY SUB PCB-MICOM;SP43T6HCX/FES,J54A,FE	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 T0083	0402-000274	DIODE-RECTIFIER;UF4004,400V,1A,DO-41,TP	
....4 Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
....4 Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
....4 IC902	1102-001130	IC-EPROM;M27W201-80F6,256KX8BIT,DIP,32P,	
....4 IC904	1203-001943	IC-VOL. DETECTOR;7025,TO-92,3P,-,PLASTIC	
....4 X901	2801-004071	CRYSTAL-UNIT;6MHZ,30PPM,28-AAM,20PF,40OH	
....4 CN902	3703-001175	CONNECTOR-BACK PANEL;64P,2R,MALE,ANGLE,A	
....4	AA97-07276A	ASSY SMD;1 , , , ,	S.N.A
.....5 D905	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 D906	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 D920	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 D923	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 D602	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 D901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 D902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5 DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5 DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5 DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5 DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5 DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5 DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5 Q920	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q908	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q902	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q914	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q915	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q916	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 IC112	1103-000180	IC-EEPROM;24C16,2Kx8Bit,SOP,8P,150MIL,10	
.....5 T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....5 IC901	1204-001912	IC-DECODER;SDA5550M,P-MQFP,100P,-,PLASTI	
.....5 R964	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R960	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R959	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R965	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R940	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R969	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R970	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R972	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R907	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R909	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R916	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R918	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R939	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R923	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R922	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R988	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R952	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R953	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R917	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....5 R911	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....5 R963	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 R901	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 R930	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R933	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R936	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R974	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R905	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R921	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R924	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R925	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R915	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....5 R912	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....5 R958	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R971	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R976	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R978	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R955	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R903	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R904	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R906	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R908	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R927	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R928	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R954	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R934	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R985	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R986	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R957	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R944	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R919	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R987	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R926	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5 R975	2007-000121	R-CHIP;820ohm,5%,1/10W,TP,1608	
.....5 R941	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
.....5 R914	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
.....5 R962	2007-000583	R-CHIP;22Kohm,1%,1/10W,TP,1608	
.....5 R966	2007-000710	R-CHIP;3.9KOHM,5%,1/10W,DA,TP,2012	
.....5 R961	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....5 C120	2203-000748	C-CERAMIC,CHIP;0.03NF,5%,50V,C0G,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C120	2203-000748	C-CERAMIC,CHIP;0.03NF,5%,50V,C0G,TP,2012	
.....5 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
.....5 C950	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C936	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C921	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C918	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C915	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C913	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C917	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5 C912	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5 C911	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5 L905	2703-001245	INDUCTOR-SMD;8.2uH,10%,2x1.25x1.25mm	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 R945	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 R946	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 R948	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 R949	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 R950	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 R951	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 PCB	AA41-00599B	PCB-MICOM;HCM4215W,FR-4,2L,B,1.6T,180X24	S.N.A
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3 T0095	BP95-00093A	ASSY SUB-PRO SCAN;SP43T7HFX/SAP,J54A	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 FC48	2305-000011	C-FILM,MPEF;470nF,5%,250V,TP,21.5X13.0X7	
....4 FC59	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
....4 FC58	2301-001664	C-FILM,MPE-PPF;100nF,3%,50V,TP,20x16x8.5	
....4 EX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
....4 T0122	2802-001177	RESONATOR-CERAMIC;2.696MHZ,0.4%,BK,10X4.	
....4 CN902	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
....4 CN902	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
....4 CN906	3711-001164	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,ANGLE,-	
....4	BP97-00181A	ASSY SMD;SP43T7HFX/SAP,J54A,PRO-SCAN	S.N.A
.....5 FD13	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD14	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD15	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD16	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD17	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD10	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD07	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD08	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD09	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 DZ016	0403-000746	DIODE-ZENER;RLZ3.9B,3.89-4.16V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5 FQ13	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 FQ04	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 FQ03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 FQ02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 FQ08	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 FQ09	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 FQ12	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 PQ01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 FQ06	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 FQ05	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 FQ07	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5 IC104	0801-000662	IC-CMOS LOGIC;74HC123,MULTIVIBATOR,SOP,1	
.....5 IC06	1203-001211	IC-VOL. DETECTOR;7027,SOT-89,3P,-,PLASTI	
.....5 T0087	1203-002186	IC-POSI.FIXED REG.;18,DPAK,3P,240MIL,PLA	
.....5 T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....5 IC01A	1204-001938	IC-DECODER;VSP9407B-B11,MQFP,80P,14X14MM	
.....5 IC118	1204-001989	IC-VIDEO PROCESS;CXA2165Q,QFP,64P,20X14M	
.....5 EL04	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	
.....5 EL05	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	
.....5 EL06	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	
.....5 EL07	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 EC32	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	
.....5 EC33	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	
.....5 EC34	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	
.....5 EQ13	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	
.....5 EQ14	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	
.....5 EQ15	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	
.....5 FR57	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....5 FR78	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....5 FR79	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....5 FR80	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....5 FR88	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....5 ER18	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 ER19	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 FR07	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 FR35	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 FR76	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 FR96	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 ER17	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 CR83	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 CR84	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 EC31	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 ER06	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 ER05	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 ER04	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 SC54	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 SC55	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 SR67	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 SR70	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 SR71	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 FR71	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR56	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR54	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR39	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR74	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 YR45	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 YR44	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 YR43	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR75	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR82	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR81	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR75	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR38	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR18	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR17	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR01	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR19	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR37	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR34	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR33	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR32	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR31	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR21	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR20	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR74	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 FR66	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 FR40	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 FR72	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....5 FR73	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....5 FR62	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....5 FR45	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 FR44	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 ER92	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 ER91	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 FR42	2007-000086	R-CHIP;5.6Kohm,5%,1/10W,TP,1608	
.....5 FR41	2007-000086	R-CHIP;5.6Kohm,5%,1/10W,TP,1608	
.....5 PR01	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 FR60	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 FR22	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 FR09	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 FR58	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	
.....5 PR02	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5 FR77	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5 FR63	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	
.....5 FR70	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 FR46	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 FR47	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 FR15	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5 FR14	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5 FR13	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5 FR10	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5 FR11	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5 FR12	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5 SR73	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	
.....5 FR36	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
.....5 FR43	2007-000869	R-CHIP;4.7Kohm,1%,1/10W,TP,1608	
.....5 ER01	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER14	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER70	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER71	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER72	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 EC40	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 EC38	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 EC39	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER03	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER08	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER09	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER10	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER11	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER15	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER16	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,

Loc. No.	Code No.	Description ; Specification	Remark
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4 CIS	AA62-00045B	HEAT SINK;COMMANDO,AL1050,T1.0,H45.0	S.N.A
....4 IC012	1203-000203	IC-POSI.ADJUST REG.;3050,TO-220,5P,-,PLA	
...3	BP97-00193A	ASSY AUTO;SP42W5HPX/SAP,J54A	S.N.A
....4 D607	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D608	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D609	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D605	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D604	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D603	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D602	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D601	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ016	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
....4 DZ016	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
....4 DZ016	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
....4 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4 Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q602	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q603	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 R125	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R808	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R810	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R811	2001-000107	R-CARBON(S);150KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R805	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-001000	R-CARBON;82KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R801	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R677	2001-001103	R-CARBON(S);20KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R674	2001-001103	R-CARBON(S);20KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R682	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R681	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R814	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
....4 R024	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
....4 R024	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
....4 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
....4 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
....4 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
....4 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
....4 C695	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 C694	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 C689	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C687	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C682	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
....4 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
....4 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-001261	C-AL;4.7uF,20%,50V,BP,TP,5x11mm,5mm	
....4 C701	2401-001261	C-AL;4.7uF,20%,50V,BP,TP,5x11mm,5mm	
....4 C701	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C701	2401-003578	C-AL;1000uF,20%,10V,GP,TP,8x20mm,5	
....4 C701	2401-003578	C-AL;1000uF,20%,10V,GP,TP,8x20mm,5	
....4 C701	2401-003578	C-AL;1000uF,20%,10V,GP,TP,8x20mm,5	
....4 C701	2401-003578	C-AL;1000uF,20%,10V,GP,TP,8x20mm,5	
....4 L105	2701-000106	INDUCTOR-AXIAL;1.5uH,10%,3x7mm	
....4 L118	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L117	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L116	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L115	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L121	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L122	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L128	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L129	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L107	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L108	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L109	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L110	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L114	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L113	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L112	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L111	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L703	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L127	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L106	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L104	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L706	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
....4 L705	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
....4 L102	2701-001040	INDUCTOR-AXIAL;10uH,10%,4.5x14mm	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
....4 GT04	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT03	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT02	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT01	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	BP97-00160A	ASSY SMD;SP42W5HPX/SAP,J54A	S.N.A
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5 Q702	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q703	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q704	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q707	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q708	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q709	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q102	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q104	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q105	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q107	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q108	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q701	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q605	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q604	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 IC101	0904-001031	IC-I/O SUPPORT CHIP;8574,8BIT,SOP,16P,-,	
.....5 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
.....5 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
.....5 IC605	1001-001178	IC-AUDIO SWITCH;TEA6422D,AUDIO SWITCH ,S	
.....5 IC705	1002-001048	IC-A/D&D/A CONVERTER;PCF8591T,8BIT,SOP,1	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 IC704	1002-001048	IC-A/D&D/A CONVERTER;PCF8591T,8BIT,SOP,1	
.....5 DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
.....5 DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
.....5 R733	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R708	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R706	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R196	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R734	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R904	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R79B	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R791	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R788	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R735	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R195	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R146	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R144	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R129	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R117	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R147	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R194	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R193	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R188	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R187	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R170	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R626	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R627	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R646	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R647	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R625	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R624	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R602	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R601	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R199	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R703	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R773	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R772	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R757	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R756	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R724	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R722	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R711	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R709	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R707	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R116	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R114	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R113	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R112	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R111	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R108	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R107	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R103	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R102	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R122	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R180	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R179	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R178	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R177	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R172	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R123	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R124	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R128	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R171	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R730	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....5 R720	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....5 R718	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....5 R163	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 R160	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 R154	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 R654	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R653	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R652	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R651	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R650	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R648	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R643	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R798	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R797	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R793	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R790	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R787	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R728	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R655	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R632	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R631	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R630	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R603	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R189	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R175	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R106	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R642	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R641	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R640	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R638	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R637	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R636	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R633	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R190	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 R176	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 R621	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R688	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R750	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R755	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R771	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R774	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R780	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R181	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R182	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R183	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R184	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R614	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R611	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R604	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R770	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R749	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R748	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R747	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R746	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R191	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	
.....5 R185	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	
.....5 R744	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....5 R743	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....5 R741	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....5 R162	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....5 R161	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....5 R159	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....5 R158	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....5 R153	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....5 R152	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....5 R716	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5 R704	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5 R110	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
.....5 R105	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
.....5 R745	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....5 R742	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....5 R740	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....5 R739	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....5 R738	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....5 R622	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....5 R619	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....5 R612	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....5 R607	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....5 R115	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 R616	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....5 R615	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....5 R609	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....5 R608	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....5 R758	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	
.....5 R104	2007-000828	R-CHIP;39Kohm,1%,1/16W,DA,TP,1608	
.....5 R109	2007-000828	R-CHIP;39Kohm,1%,1/16W,DA,TP,1608	
.....5 R751	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5 R752	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5 R753	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5 R754	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R605	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5 R610	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5 R617	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5 R620	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5 R717	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R719	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R721	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R723	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R715	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R714	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R713	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R712	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R799	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R792	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R789	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R731	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R729	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R727	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R726	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R725	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R121	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R120	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R119	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R118	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R710	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R702	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R701	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R174	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R138	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R139	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R141	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R173	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R623	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....5 R618	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....5 R613	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....5 R606	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....5 C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000332	C-CERAMIC,CHIP;0.012NF,5%,50V,C0G,TP,160	
.....5 C120	2203-000332	C-CERAMIC,CHIP;0.012NF,5%,50V,C0G,TP,160	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5 L701	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L707	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L708	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L901	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L902	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L604	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L125	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L126	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L601	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L602	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L603	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 PCB	AA41-00809B	PCB-MAIN;SP42W5,FR-4,2L,B,1.6T,245X245,P	S.N.A
.....5 C727	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	
.....5 IC602	1204-002054	IC-SOUND PROCESSOR;MSP3452G-B3,PQFP,80P,	
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3 X601	2801-004020	CRYSTAL-UNIT;18.432MHz,30ppm,28-AAM,12pF	
...3 T0093	BP95-00146F	ASSY SUB PCB-CONV MOD;,J54A,CG MOD	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 L01	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
....4 CN902	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
....4 CN906	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
....4	BP97-00513D	ASSY SMD;,P55A,CG MOD	S.N.A
.....5 D13	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D12	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D11	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D10	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D14	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D15	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D16	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D17	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 D18	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D01	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D02	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D03	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D04	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D05	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D09	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D08	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D07	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D06	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 Q02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 Q03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 Q10	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.....5 Q04	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.....5 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5 IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....5 IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....5 IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....5 IC08	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	
.....5 IC13	1001-001155	IC-ANALOG MULTIPLEX;NC7SB3157P6X,CMOS,SC	
.....5 IC112	1103-001195	IC-EEPROM;24C64,8Kx8Bit,SOP,8P,150MIL,10	
.....5 DU410	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
.....5 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5 T0074	1201-001520	IC-VIDEO AMP;EL2250CS,SOIC,8P,150MIL,DUA	
.....5 IC03	1203-001824	IC-VOL. DETECTOR;7042,SOT-89,3P,-,PLASTI	
.....5 T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....5 IC17	1209-001163	IC-PLL;TLC2932IPWLE,SOP,14P,-,PLASTIC	
.....5 R36	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....5 R35	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....5 R31	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....5 R30	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....5 R143	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R144	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R25	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R122	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R123	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R141	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R136	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R15	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R24	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R45	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R46	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R09	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R10	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R129	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R134	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R135	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R59	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R65	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R71	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R77	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R91	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R17	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R20	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R47	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R62	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R64	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R68	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R58	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R56	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R52	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R70	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R98	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R94	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R82	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R80	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R76	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R74	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R38	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R37	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R110	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R11	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R101	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R03	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R39	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R50	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R44	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R43	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R42	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R41	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R40	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R128	2007-000079	R-CHIP;1.8Kohm,5%,1/10W,TP,1608	
.....5 R81	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 R75	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 R69	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 R51	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 R57	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 R63	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 R109	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....5 R66	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R61	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R60	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R55	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R54	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R79	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R78	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R73	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R72	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R67	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R49	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R08	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R07	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R06	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R04	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R01	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R48	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R133	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R121	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R119	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R118	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R86	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R92	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R93	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R96	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R97	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R85	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R113	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R114	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R115	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R83	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R84	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R125	2007-000091	R-CHIP;12Kohm,5%,1/10W,TP,1608	
.....5 R05	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
.....5 R127	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
.....5 R100	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	
.....5 R32	2007-000119	R-CHIP;560ohm,5%,1/10W,TP,1608	
.....5 R34	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 R29	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 R28	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 R117	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 R107	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 R33	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 R120	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 R90	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....5 R89	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....5 R88	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....5 R87	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....5 R108	2007-000381	R-CHIP;13Kohm,5%,1/10W,TP,1608	
.....5 R139	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....5 R138	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....5 R137	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....5 R99	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
.....5 R95	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R126	2007-000857	R-CHIP;4.3Kohm,1%,1/16W,DA,TP,1608	
.....5 R27	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R26	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R116	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....5 RN04	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RN05	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RN06	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RN01	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RN02	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RN03	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.....5 C120	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.....5 C120	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.....5 C120	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.....5 C120	2203-001245	C-CERAMIC,CHIP;0.082nF,5%,50V,NP0,TP,201	
.....5 C38	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C40	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C70	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C84	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C14	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C06	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C03	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C01	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C80	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5 OSC01	2804-001479	OSCILLATOR-CLOCK;24MHZ,100PPM,50PF,TP,5V	
.....5 F103	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
.....5 F103	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
.....5 F103	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
.....5 F103	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 T0119	AA09-00032A	IC MICOM;,TSC87251G2D-OTP,4.5 TO 5.5V,-	S.N.A
.....5 1	AA41-00717D	PCB (FR 4) 4L(AU);CONVERGENCE,FR-4,4,1.6	S.N.A
.....5 IC125	BP13-00003A	IC ASIC;SDC12,128,-0.3 TO +3.8,0 TO 70,Q	
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
..2 T0100	BP94-00502E	ASSY PCB MISC-A/V FRONT;54/62T8,J54A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 SW101	3404-000208	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
...3 CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	
...3 CN906	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
...3 JK101	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3 JK102	3722-001164	JACK-PIN;3P,3.4mm,SN,WH:YE:RE,#16-22	
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 T0076	AA39-00260A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	
...3	AA97-07426A	ASSY AUTO-A/V FRONT;SP42W5HCX/XTT,J54A,C	S.N.A
....4 R125	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
....4 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 PCB	AA41-00499B	PCB-FRONT A/V;SVP-54T6SR,FR-1,1L,A,1.6T,	S.N.A
...3 CNW01A	BP39-00016B	LEAD CONNECTOR;HCL4715WB,UL2547#26,UL/CS	
...3 T0147	AA91-00762S	ASSY-JACK SIDE;54/62T8,SV704P,ASIA	
....4	AA61-00793E	HOLDER-SIDE AV;47H1,ABS HB,GRAY,SV-704P	S.N.A
....4 T0150	AA64-02085F	DOOR-AV;H1,ABS HB,GRAY,SV-704P	
....4	AA64-02086U	INLAY-AV;43T7,PS SHEET,T0.5,L/GRAY,J54A	S.N.A
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2 T0098	BP94-00502L	ASSY PCB MISC-CONTROL;SP54T8,J54A,CONTRO	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 LEDY01	0601-001381	LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3 SWY08	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY07	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY06	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY05	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY01	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY03	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY04	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	
...3 CN906	3711-003353	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,ANGLE,	
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 RMY01	AA32-00012A	MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
...3 T0076	AA39-00223A	LEAD CONNECTOR-ASSY;,11P,800MM,67096-011	
...3 T0076	AA39-00259A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	

Loc. No.	Code No.	Description ; Specification	Remark
...3	BP97-00503V	ASSY AUTO;SP54T8,J54A,CONTROL	S.N.A
....4 DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 QY02	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
....4 QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
....4 RY07	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RY01	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RY09	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY08	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 0	AA41-00768C	PCB CONTROL;ST43T8,1L,1.6T,245x245,J54A,	S.N.A
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	

ASSY ACCESSORY

1 M0016	BP92-00511R	ASSY ACCESSORY;SP43T6HCX/HAC,J54A,C2.0	S.N.A
..2	6801-001063	CARD-REGISTRATION;-,SAMSUNG,ENG+ARAB,MOJ	N.A
..2	6902-000018	BAG PE;LDPE,T0.1,W280,L400,GRY,8,2-	S.N.A
..2 T0116	AA39-40001B	CABLE RCA;,1500MM	
..2 T0113	AA61-20126A	HOLDER-LEG;-,ABS,-,-,-,BLK,HB	
..2	AA68-40020C	CARD WARRANTY;-,-,W/P 100(G),-,-,-,-,WHT	S.N.A
..2	AA69-30009C	BAG-SHEET;LDPE,T0.08,W150,L120,-,-,-	S.N.A
..2 T0074	BP59-00008A	REMOCON;,TM65A,COMMOANDO,J54A,49,L/GRAY,	
...3 T0122	2802-000194	RESONATOR-CERAMIC;8MHz,1.0%,TP,8.5x4.5x5	
...3 T0119	AA09-00371A	IC MICOM;SZTM-839C R-52MX,28PIN,16KBYTE,	
..2 CIS	BP68-00027B	MANUAL USERS;SP54T8HCX/XSG,ENG,W/P 100g,	S.N.A
..2 CIS	BP68-00090A	MANUAL USERS;SP43T7HF,FA,W/P100G,J54A,B5	

ASSY P/MATERIAL

1	BP92-00554A	ASSY P/MATERIAL;SP62T8HFX/XSA,J54A	S.N.A
..2	AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	S.N.A
..2	AA61-20285A	HOLDER-BOX;3456,PP,-,-,-,WHT,VO	S.N.A
..2	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2	AA69-00305A	BAG AIR;ALL,LDPE,1000,500,CLR,	S.N.A
..2	AA69-00306A	BAG AIR;LDPE,-,1800,1000,CLR,ASSY,ALL,-	S.N.A
..2	AA69-30036B	BAG-PE;HDPE,0.02,2500,2000,-,-,HCJ-655W,	S.N.A

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

Loc. No.	Code No.	Description ; Specification

3-3 SP54T8HCX/BWT

ASSY COVER FRONT

Loc. No.		Code No.	Description ; Specification	Remark
1	M0001	BP90-00142M	ASSY COVER FRONT;SP54T8HFX/BWT,J54A	S.N.A
..2	HC+CW	6009-001296	SCREW-SPECIAL;BH,+,-,M4,L12(11),ZPC(BLK)	
..2	T0118	AA26-00101A	TRANS FBT-H/V DISTRIBUTOR;FWZ50A001E/FFA	
..2	T0076	AA39-00284A	LEAD CONNECTOR-ASSY;SVP-47W3HD,UL2547#26	
..2		AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE 94HF	S.N.A
..2	T0069	AA60-00091N	SPACER-FELT;-,FELT,70X10,-,-,BLK,T1.0,-,	S.N.A
..2	T0115	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-	
..2		AA61-00618C	GUIDE-FLOW;54J8,J7,ABS,IVORY,V0	S.N.A
..2	T0069	AA63-60002V	SPACER-FELT;-,FELT,-,-,-,BLK,T0.3,-,60X4	S.N.A
..2	T0069	AA63-60002V	SPACER-FELT;-,FELT,-,-,-,BLK,T0.3,-,60X4	S.N.A
..2	T0069	AA63-60131A	SPACER-FELT;SVP403J,FELT,-,-,-,BLK,T0.5,	S.N.A
..2		AA65-00016A	CLAMPER CORE-CABLE;PJTV,NYLON,NTR,6/6	S.N.A
..2	T0053	AA67-00116B	SCREEN FRESNEL;53,1125*854,T2	
..2	T0110	AA67-00130A	SUN SCREEN-AG;54J8,1125*853*,T=82%,G=110	
..2	T0056	AA67-00199A	SCREEN-TINT;54,1123*852,P=0.5,DNP	
..2	T0102	BP73-00004A	RUBBER-CAP;42W5,SILICONE,WHT,RUBBER	
..2		BP96-00226B	ASSY COVER P-WOOD;54T8,WOOD,J54A,ASIA	S.N.A
...3	T0082	3001-001107	SPEAKER;20W,8OHM,95DB,1300HZ	
...3	T0082	3001-001134	SPEAKER;30W,8OHM,93DB,60HZ	
...3	T0076	AA39-00042A	LEAD CONNECTOR-ASSY;,2.2UF,200MM,REC,REC	
...3		AA61-00094C	HOLDER-RAIL;PCJ533R,ABS,-,-,-,BLK,HB,480	S.N.A
...3		AA61-00458C	CASTER;,URETHANE,OD40,BLK,H47,95'	S.N.A
...3		AA61-00506B	HOLDER-CRT,MAIN;43,54,62J8,HIPS,-,-,-,BL	S.N.A
...3		AA61-00507B	HOLDER-CABINET,WOOD;43,54,62J8,ABS,-,-,-	S.N.A
...3		AA61-00508D	HOLDER-JERSEY;W3,ABS V0,GRAY,G4309	S.N.A
...3	T0245	AA61-00864A	HOLDER-PCB;W3,HIPS,V0,BLK	S.N.A
...3		AA61-01115A	HOLDER-VENT;55W9,HIPS HB,BLK	S.N.A
...3		AA63-00348B	COVER-DUCT;54,62J8,HIPS,-,-,-,HB,BLK,-	S.N.A
...3		AA64-02859A	CABINET-BOSS,RACK;55W9,HIPS,HB,NTR	S.N.A
...3		BP61-00191A	HOLDER-MASK,TOP;54T8,ABS HB,BLK	S.N.A
...3		BP61-00191B	HOLDER-MASK SIDE;54T8,ABS,HB,,,,BLK,	S.N.A
...3		BP64-00207A	CABINET-WOOD;54T8,WOOD,,,,,SILVER(SDE833	S.N.A
...3		AA98-00049A	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505	S.N.A
....4	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	HC+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3		AA61-00097A	HOLDER-WIRE;-,NYLON 6/6,-,-,-,NTR,-	S.N.A
...3		AA61-01133A	VELCRO-B;COMMANDO,BST1 1/4H	S.N.A
...3	HC+CW	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,-,-,	S.N.A
...3		BP61-00284A	HOLDER-MASK CORNER;54T8,ABS HB,BLK	S.N.A
...3		AA61-00856B	BRACKET-DOOR;47W3,SECC,T1.0,BLK	S.N.A
..2		BP96-00227A	ASSY MISC P-BRKT SCREEN TOP;54T8,SECC T1	S.N.A
...3		BP61-00043B	HOLDER-SENSOR;W9,PC HB,VIOLET	S.N.A
...3	T0254	BP61-00189A	BRACKET-SCREEN,TB;54T8,SECC,T1.0,SCREEN	S.N.A
...3		BP65-00004A	CLAMPER CORE-WIRE;52Q7,NYLON	S.N.A
...3	T0069	AA60-00091A	SPACER-FELT;-,FELT,150X10,-,-,BLK,T0.35,	S.N.A
..2		BP96-00227B	ASSY MISC P-BRKT SCREEN BOT;54T8,SECC T1	S.N.A
...3		BP61-00043B	HOLDER-SENSOR;W9,PC HB,VIOLET	S.N.A
...3	T0254	BP61-00189A	BRACKET-SCREEN,TB;54T8,SECC,T1.0,SCREEN	S.N.A
...3		BP65-00004A	CLAMPER CORE-WIRE;52Q7,NYLON	S.N.A
...3	T0064	BP65-00005A	CLAMPER CORE;52Q7,NYLON	S.N.A
...3	T0069	AA60-00091A	SPACER-FELT;-,FELT,150X10,-,-,BLK,T0.35,	S.N.A
..2		BP96-00228A	ASSY MISC P-BRKT SCREEN R;54T8,SECC T1.0	S.N.A
...3		BP61-00043B	HOLDER-SENSOR;W9,PC HB,VIOLET	S.N.A
...3	T0056	BP61-00190A	BRACKET-SCREEN,RL;54T8,SECC,T1.0,SCREEN	S.N.A
...3		BP65-00004A	CLAMPER CORE-WIRE;52Q7,NYLON	S.N.A
...3	T0069	AA60-00091A	SPACER-FELT;-,FELT,150X10,-,-,BLK,T0.35,	S.N.A
..2		BP96-00228B	ASSY MISC P-BRKT SCREEN L;54T8,SECC T1.0	S.N.A
...3		BP61-00043B	HOLDER-SENSOR;W9,PC HB,VIOLET	S.N.A
...3	T0056	BP61-00190A	BRACKET-SCREEN,RL;54T8,SECC,T1.0,SCREEN	S.N.A
...3		BP65-00004A	CLAMPER CORE-WIRE;52Q7,NYLON	S.N.A
...3	T0069	AA60-00091A	SPACER-FELT;-,FELT,150X10,-,-,BLK,T0.35,	S.N.A
..2	T0076	BP96-00229C	ASSY COVER P-FRONT MASK;54T8,HIPS,HB,GRY	
...3		AA65-00020A	CLAMPER CORE-WIRE;55W9,NYLON 66	S.N.A
...3	T0017	BP64-00164C	CABINET FRONT-MASK;54T8,HIPS,HB,G4309,SV	S.N.A
...3	T0102	BP73-00004A	RUBBER-CAP;42W5,SILICONE,WHT,RUBBER	
...3		BP61-00285A	HOLDER-MASK SNAP;54T8,HIPS HB,BLK	S.N.A
..2	T0071	BP96-00230C	ASSY COVER P-FRONT BOT;54T8,HIPS,HB,G430	
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3		AA61-01104A	HOLDER-LOCK;Z7,ABS	S.N.A
...3		BP60-00004A	SPACER-BUMPON;55W9,RUBBER,5MM	S.N.A
...3		BP61-00108A	GUIDE-KONB,CONTROL;42W4,G3676,42W4,ABS HS	S.N.A
...3		BP64-00078A	WINDOW REMOCON-LED;42W4,PC,42W4,PC,CLEAR	N.A
...3		BP64-00151C	CABINET FRONT-BOTTOM;54T8,HIPS,HB,GRY,SV	S.N.A
...3	T0022	BP64-00165A	KNOB CONTROL;54T8,ABS,HB,GRAY,G3676	
...3	T0023	BP64-00166A	KNOB POWER;54T8,ABS,HB,GRAY,G3676	
...3	T0057	BP64-00178A	BADGE-BRAND;ALL,AL,T1.5,78,13.0,,BLK,SIL	S.N.A
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	CIS7	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	S.N.A
...3		AA61-20129A	HOLDER-WIRE;-,NYLON-66,-,-,-,NTR,DAFC-25	S.N.A
...3		AA61-01132A	VELCRO-A;COMMANDO,BST1 1/4H	S.N.A
..2	T0269	BP96-00232A	ASSY MISC P-DOOR RACK;54T8,MOLD+GLASS+BR	
...3	T0081	6003-001323	SCREW-TAPTITE;BH,+,B,M4,L12,NI PLT,SWRCH	S.N.A
...3	T0081	6003-001374	SCREW-TAPTITE;FH,+,B,M4,L12,NI PLT,SWRCH	
...3		AA61-01116A	BRACKET-HINGE;55W9,SECC,T2.0	S.N.A
...3		BP61-00181A	BRACKET-DOOR,RACK;54T8,SECC,T1.0	S.N.A
...3	CIS1	BP64-00154A	CABINET-DOOR,RACK;54T8,HIPS,HB,GRAY	
...3		BP64-00208A	WINDOW-DOOR RACK;54T8,GLASS,T3.0,,,,BR,	S.N.A

ASSY COVER REAR

Loc. No.		Code No.	Description ; Specification	Remark
1	M0002	BP90-00143A	ASSY COVER REAR;SP54T8HGX/SAP,J57A	S.N.A
..2	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2		AA61-01134A	HOLDER-MIRROR,BOT;43,54T6,HIPS HB,BLK	S.N.A
..2	T0112	AA64-01379B	CABINET-BACK,TOP;54J8,HIPS,-,-,-,HB,BLK,	
...3		0103-001229	RESIN-HIPS;HR-1360,GRY,C7425,HB	S.N.A
..2	CBT	AA64-60449B	INLAY-COVER;SP-434JMF,PS,T0.5,149.3X69.5	S.N.A
..2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	S.N.A
..2	T0108	AA67-00080A	MIRROR-BACK;54J8,GLASS,940.5*684.5*674.5	
..2	T0068	AA91-00489B	ASSY-BRKT,MIRROR;-,-,SECC-1 T1.0,54J8	
...3	T0069	AA60-00073A	SPACER-FELT;54J8,FELT,-,-,-,-,T1.0,-,210	S.N.A
...3		AA61-00512B	BRACKET-MIRROR;43,53,61J8,SECC-1,T1.0,-,	S.N.A
..2		AA91-00887A	ASSY-HOLDER,MIRROR(R);,HIPS HB BLK,INLAY	S.N.A
...3		AA61-00873A	HOLDER-MIRROR,R;54J8,HIPS HB,BLK	S.N.A
...3		AA64-00263H	INLAY-FORM;54J8,PVC FORM,T2.0,BLK,220X7	S.N.A
..2		AA91-00887B	ASSY-HOLDER,MIRROR(L);,HIPS HB BLK,INLAY	S.N.A
...3		AA61-00873B	HOLDER-MIRROR,L;54J8,HIPS HB,BLK	S.N.A
...3		AA64-00263H	INLAY-FORM;54J8,PVC FORM,T2.0,BLK,220X7	S.N.A
..2	T0112	BP64-00152A	CABINET-BACK,BOT;54T8,HIPS,HB,BLK	
..2	T0014	BP64-00153A	CABINET-BACK,SIDE R;54T8,HIPS,HB,BLK	
..2	T0015	BP64-00153B	CABINET-BACK SIDE L;54T8,HIPS,,,,HB,BLK,	
..2	T0062	BP61-00180C	HOLDER-POWER;HIPS,T8,Q7,V0,BLK	S.N.A

ASSY PRT

Loc. No.		Code No.	Description ; Specification	Remark
1		BP91-00587A	ASSY PRT;SP47W3HCX/FES,J54A,C2.0 S100-50	S.N.A
..2	T0026	BP91-00778S	ASSY CPT-R;SP47W3HCX/FES,J54A,R,C2.0 S10	

Loc. No.	Code No.	Description ; Specification	Remark
...3	AA03-00307A	CRT MONO;P16QDU11RJA(S),FREE,0.78MH,7.0M	S.N.A
...3 T0117	AA26-30006F	TRANS FBT-ANODE CAP ASS'Y;-,FWZ-50A001C,	
...3 T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3 T0079	AA33-00016A	MAGNET CONVERGENCE;JH 92LT - 29F,-,29.1M	
...3 T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3	AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3	AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3	AA61-00806B	CASE-COUPLER,R;PROJ,ALDC,T8,BLK	S.N.A
...3	AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3 T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3	AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3 T0109	AA67-00140A	LENS-ASSY;,SSM-100-50,CLEAR A/B	
...3 T0051	AA67-00148A	LENS-PALTE;,SSM-100,SHADING PLATE	
...3 T0051	AA67-00151A	LENS;,SSM-100,RED,C-ELEMENT	
...3 T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
....4 T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
....4	AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
....4	AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3	BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
..2 T0027	BP91-00778T	ASSY CPT-G;SP47W3HCX/FES,J54A,G,C2.0 S10	
...3	AA03-00308A	CRT MONO;P16QDU11GHA(S),FREE,0.78MH,7.0M	S.N.A
...3 T0117	AA26-30006F	TRANS FBT-ANODE CAP ASS'Y;-,FWZ-50A001C,	
...3 T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3 T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3	AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3	AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3	AA61-00807B	CASE-COUPLER,G;PROJ,ALDC,T8,BLK	S.N.A
...3	AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3 T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3	AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3 T0109	AA67-00140A	LENS-ASSY;,SSM-100-50,CLEAR A/B	
...3 T0051	AA67-00148A	LENS-PALTE;,SSM-100,SHADING PLATE	
...3 T0051	AA67-00152A	LENS;,SSM-100,GREEN,C-ELEMENT	
...3 T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
....4 T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
....4	AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
....4	AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3	BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
..2 T0028	BP91-00778U	ASSY CPT-B;SP47W3HCX/FES,J54A,B,C2.0 S10	
...3	AA03-00309A	CRT MONO;P16QDU11BEA(S),FREE,0.78MH,7.0M	S.N.A
...3 T0117	AA26-30006F	TRANS FBT-ANODE CAP ASS'Y;-,FWZ-50A001C,	
...3 T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3 T0079	AA33-00018A	MAGNET CONVERGENCE;JH 92LT - 36F,-,29.1M	
...3 T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3	AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3	AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3 T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3	AA61-00808B	CASE-COUPLER,B;PROJ,ALDC,T8,BLK	S.N.A
...3	AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3 T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3	AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3 T0109	AA67-00140A	LENS-ASSY;,SSM-100-50,CLEAR A/B	
...3 T0051	AA67-00148A	LENS-PALTE;,SSM-100,SHADING PLATE	
...3 T0051	AA67-00150A	LENS;,SSM-100,CLEAR,C-ELEMENT	
...3 T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
....4 T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
....4	AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
....4	AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3	BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A

ASSY FIXING

1	BP91-00908A	ASSY FIXING;SP54T8HFX/BWT,J54A	S.N.A
..2 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
..2 T0076	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
..2 T0070	AA61-01127A	HOLDER-CHASSIS;COMMANDO,HIPS V0,G4309	S.N.A
..2	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2	AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	S.N.A
..2	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
..2	AA65-30111A	CLAMPER CORE-WIRE;ALL MODEL,NYLON,V0,-,W	S.N.A
⚠ ..2 T0066	AA96-20130A	ASSY POWER CORD;-,CP2/NO(4.0R),H/C150,KJ	S.N.A
...3	3811-000401	WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22	S.N.A
...3 T0077	AA39-10003B	CBF POWER CORD;-,KJP-140,KLCE-2F,2.4m,HO	
...3	AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	S.N.A
..2	BP39-00036A	LEAD CONNECTOR;J54A/SP42W5HP,UL2547#26,U	

ASSY CHASSIS

1 M0017	BP91-00915T	ASSY CHASSIS;SP54T8HFX/BWT,J54A,RUSSIA	S.N.A
..2 T0098	AA94-08268A	ASSY PCB MISC-VM;COMMANDO	
...3 RZ120	2008-001097	R-FUSIBLE(S);33OHM,5%,1/2W,AC,BK,2.5X6.5	
...3	AA97-07230M	ASSY AUTO-VM;COMMANDO	S.N.A
....4 DZ106	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DZ105	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DZ102	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 QZ103	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 QZ106	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 RZ122	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ110	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ104	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ105	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ106	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ114	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
....4 RZ103	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4 RZ111	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4 RZ123	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4 RZ113	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4 RZ112	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4 RFZ101	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
....4 C598	2201-000193	C-CERAMIC,DISC;0.01NF,0.25PF,50V,C0G,TP,	
....4 C598	2201-000193	C-CERAMIC,DISC;0.01NF,0.25PF,50V,C0G,TP,	
....4 C598	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
....4 C598	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
....4 C598	2201-000604	C-CERAMIC,DISC;0.056NF,+100-0%,500V,SL,T	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4 C701	2401-001157	C-AL;33uF,20%,160V,GP,TP,12.5x20,5	
....4 C701	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4 C701	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4 C701	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 LZ101	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
....4 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 PCB	AA41-00611A	PCB-VM;HCM4215W,FR-1,1L,A,1.6T,245X245,P	S.N.A
...3 QZ101	AA96-00243M	ASSY H/S;-,AMP,AA62-000450A,2SA1011,HERC	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0090	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-	S.N.A
...3 QZ102	AA96-00243L	ASSY H/S;-,CRT,AA62-000450A,2SC2344,HERC	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0090	0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3 T0079	AA33-00017A	MAGNET CONVERGENCE;JH 92LT - 29G,-,29.1M	
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 T0076	AA39-20055C	LEAD CONNECTOR-ASSY;,6P,500,YBNH025-06,6	
..2 T0105	AA94-08270A	ASSY PCB MISC-DY JACK;COMMANDO	
...3	AA97-07230N	ASSY AUTO;COMMANDO	S.N.A
....4 R301	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R302	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R303	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 PCB	AA41-00632A	PCB-DY CONNECTION;HCM4215W,FR-1,1L,A,1.6	S.N.A
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 GT01	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3 GT05	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3 GT09	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3 GT13	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3	AA61-01197A	HOLDER-PCB,DY;COMANDO,ABS V0,BLK	S.N.A
..2 T0101	BP94-00134E	ASSY PCB MISC-SENSOR ASSY;SENSOR	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	
...3	BP97-00208A	ASSY SMD;0	S.N.A
....4 Q01	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
....4 PCB	AA41-00853A	PCB-SERSOR;SVP-42W5HRC,FR-4,2L,A,1.6T,24	S.N.A
....4 D01	BP32-00001A	SENSOR PHOTO;BCS5030G1,-40 TO +85,0.42 U	
....4 R01	2007-000305	R-CHIP;10Mohm,5%,1/10W,TP,1608	
....4 R02	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
....4 R03	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
....4	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
..2 CIS	BP94-00220A	ASSY PCB MISC-MASTER S/W;SVP-55W9HRTC,P5	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 SWP01	3403-001130	SWITCH-PUSH;250VAC,5A,SPST,OFF-ON-OFF,-	
...3 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
...3	AA61-00719B	HOLDER-MASTER;T6,W3,HIPS V0,BLK,J52A	S.N.A
...3	BP97-00134A	ASSY AUTO-MASTER S/W;SVP-55W9HRTC,P55A	S.N.A
....4 PCB	AA41-00784A	PCB-POWER S/W;SVP-55W9HRTC,CEM-1,1L,A,1.	S.N.A
....4 EY02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 GT01	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT02	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
...3 CNW01	BP39-00048A	LEAD CONNECTOR;P55A/SVP-47W3HRT,UL1617#2	
..2	BP94-00256A	ASSY PCB CRT-PCB;SP43T7HFX/XEO,J54A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 VR561	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 VR531	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 VR501	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3 V561	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 V531	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 V501	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
...3 CN906	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
...3 CN906	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN906	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3 SG301	4715-001050	SURGE ABSORBER;2.4kV,20%,1500A,-,DISC-RA	
...3 SG562	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 SG532	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 T0076	AA39-00112A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,10	
...3 T0076	AA39-00120F	LEAD CONNECTOR-ASSY;SIR-T165,UL1007#26,U	
...3 T0076	AA39-00198D	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1617	
...3 T0076	AA39-20010E	LEAD CONNECTOR-ASSY;,1P,800,YFH800-01,S,	
...3 T0076	AA39-20027B	LEAD CONNECTOR-ASSY;,6P,400,67096-006,S,	
...3 T0076	AA39-20031D	LEAD CONNECTOR-ASSY;,9P,500,67096-009,S,	
...3 Q371	AA96-00244H	ASSY H/S;SCREW,2SC4636(2),CRT,SLICON-OIL	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0090	0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00046A	HEAT SINK-PS;-,-,T1.0,-,D1(DREAM) 60X25X	S.N.A
...3 IC501	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
...3 IC531	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
...3 IC561	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 T0074	1201-001131	IC-VIDEO AMP;6111,SIP,9P,-,SINGLE,-,PLAS	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	S.N.A
...3 T0076	BP39-00004B	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3 T0076	BP39-00004C	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3 T0076	BP39-00004C	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3 T0103	BP59-00005A	MODULE-FOCUS PACK ASS'Y;PJT TV,F301-P03A	
...3	BP97-00088A	ASSY AUTO;SP42W5HPX,J54A,CRT-PCB-ASSY	S.N.A
....4 D504	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D509	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D510	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D372	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D361	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D362	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D371	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 Q563	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q534	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q533	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q361	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q362	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L,	
....4 Q502	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 R125	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R584	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R554	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R524	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R580	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R550	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R520	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R577	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R547	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R517	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R366	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R125	2001-000232	R-CARBON;1.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000319	R-CARBON;120KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000938	R-CARBON;680HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R566	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R536	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R506	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R581	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R551	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R521	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R371	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R370	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R369A	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R367	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R368	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R369	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R567	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R537	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R507	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R381	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R361	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R374	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R373	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R372	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R377	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R375	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R365	2001-001120	R-CARBON(S);3.3OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R574	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R544	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R514	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R583	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R582	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R553	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R552	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R522	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R523	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R559	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R589	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R529	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R575	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R545	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R579	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R578	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R549	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R548	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R519	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R518	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R588	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R538	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R508	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R573	2008-000204	R-FUSIBLE(S);0.22ohm,10%,1/2W,AF,TP,2.5x	
....4 R543	2008-000204	R-FUSIBLE(S);0.22ohm,10%,1/2W,AF,TP,2.5x	
....4 R513	2008-000204	R-FUSIBLE(S);0.22ohm,10%,1/2W,AF,TP,2.5x	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4 C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4 C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4 C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4 C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4 C565	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C535	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C505	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C567	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C537	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C507	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C361	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 C701	2401-001621	C-AL;6.8uF,20%,450V,GP,TP,13x20,5	
....4 L531	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L561	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
....4 SG533	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG561	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG563	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG501	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG503	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG531	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 EL06	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EL03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EL563	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL537	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL536	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL535	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL564	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL565	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL566	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL567	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL534	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL02	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL04	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL05	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL533	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL505	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL504	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL503	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 GT537	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT536	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT535	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT534	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT533	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT561	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT568	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT567	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT564	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT563	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT562	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT501	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT374	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT373	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT372	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT371	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT502	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT532	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT531	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT506	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT504	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT503	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT375	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 R382	2002-001014	R-COMPOSITION;6.8Kohm,10%,1/2W,AA,TP,3.7	
....4 PCB	AA41-00600E	PCB-CRT;HCM4215W,FR-1,1L,E,1.6T,245X197(	S.N.A
....4 T0083	0402-000243	DIODE-RECTIFIER;RC2-V1,2000V,0.2A,DO-201	
...3 T0076	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,400,YFH800-01,S,	
...3 T0076	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,400,YFH800-01,S,	
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3 T0076	AA39-20010C	LEAD CONNECTOR-ASSY;,1P,600,YFH800-01,S,	
...3 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
..2 T0146	BP94-00278A	ASSY PCB MISC-SUB;SP43T6HF,J54A,220V	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 T0083	0402-000236	DIODE-RECTIFIER;GI824,400V,5A,-,TP	
...3 T0083	0402-000250	DIODE-RECTIFIER;RG4C,1000V,1A,-	
...3 DZS801	0406-001007	DIODE-TVS;P6KE180A,171/180/189V,600W,CAS	
...3 T0090	0502-000405	TR-POWER;-,NPN,70W,TO-220,BK,10	
⚠ ...3 PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
⚠ ...3 PC811S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
...3 DU410	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV	
...3 IC012	1203-000162	IC-POSI.ADJUST REG.;317,TO-220,3P,-,PLAS	
...3 T0086	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
...3 T0123	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
...3 IC851	1203-001400	IC-POWER PRESCALER;SE110N,T0-220(SIP),3P	
...3 T0086	1203-002177	IC-PWM CONTROLLER;VIPER12ADIP,DIP,8P,300	
⚠ ...3 NT801S	1404-001195	THERMISTOR-NTC;5.1ohm,15%,2900,27mW/C,BK	
⚠ ...3 VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
...3 C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
...3 C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
...3 C598	2201-000987	C-CERAMIC,DISC;2.2NF,20%,400V,Y5U,TP,12.	
...3 C598	2201-000987	C-CERAMIC,DISC;2.2NF,20%,400V,Y5U,TP,12.	
...3 C814	2301-001041	C-FILM,PPF;15nF,5%,1.6KV,TP,29x14x21.5,2	
⚠ ...3 CR471S	2301-001091	C-FILM,MPPF;470nF,5%,400V,TP,26x21.5x14.	
⚠ ...3 CR430S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ ...3 CR431S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ ...3 CX801S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
⚠ ...3 CR436S	2306-000235	C-FILM,MPPF;560nF,5%,400V,TP,26*22.5*14,	
⚠ ...3 CR473S	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
...3 C491	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
⚠ ...3 CR474S	2306-000326	C-FILM,MPPF;4.7nF,5%,1.6KV,TP,28.5x16x9m	
...3 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
...3 C701	2401-000787	C-AL;220uF,20%,160V,GP,TP,16x31.5mm	
...3 C701	2401-001675	C-AL;820uF,20%,200V,GP,BK,25x50mm,1	
...3 C701	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM,7.5	
...3 C701	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM,7.5	
...3 C701	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM,7.5	
...3 C701	2401-003465	C-AL;680UF,20%,450V,GP,BK,35X60MM,22.5	
⚠ ...3 FP801S	3601-001007	FUSE-CARTRIDGE;250V,6.3A,TIME-LAG,GLASS,	
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
⚠ ...3 T432	AA26-00053A	TRANS;-,-,-,1.2mH,-,-,-,-,-,-,31.5KHZ,-,	
⚠ ...3 T481	AA26-00091A	TRANS-HV-STORAGE;4mH,-,14P,830uH,180V,10	
⚠ ...3 T444S	AA26-00100A	TRANS FBT;FFA97513L,CT29A7DR,0.3mH,-,-,-	
⚠ ...3 T431	AA26-50001U	TRANS-HORIZ.DRIVE;-,-,-,28mH,-,-,105uH,-	
⚠ ...3 T461	AA26-50001V	TRANS-HORIZ.DRIVE;-,-,-,6.0mH,-,-,113uH,	
...3 L432	AA27-00056A	COIL HORIZ. WIDTH;-,600uH,YL9N 15x27.5 C	
...3 L862	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L863	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L864	AA27-10002L	COIL CHOKE;-,24uH,K,-,2A,-,24UH-K,10x10m	
⚠ ...3 LR401S	AA27-30003M	COIL LINEARITY;-,5uH,OWA14x15,USRC0.1x60	
⚠ ...3 LX804S	AA29-00011A	FILTER LINE NOISE;CZ32W8,-,0.20MAX,1.5KV	
⚠ ...3 LX803S	AA29-00012A	FILTER LINE NOISE;CS29A6PF8X/HAC,-,0.1MA	
⚠ ...3 LX801S	AA29-30002L	FILTER LINE NOISE;-,10mHMIN,5A,AC90~260V	
...3 T0076	AA39-00180A	LEAD CONNECTOR-ASSY;,14P,100MM,YBNH250-1	
...3 GT01	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3 D856	AA96-00243E	ASSY H/S;-,SOUND,AA62-00045A,FMG-G26S	S.N.A
...3 D855	AA96-00243E	ASSY H/S;-,SOUND,AA62-00045A,FMG-G26S	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0083	0402-000231	DIODE-RECTIFIER;FMG-G26S,600V,4A,TO-220F	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
...3 Q433	AA96-00243H	ASSY H/S;-,POWER,AA62-00045A,KSD73Y,C17A	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0090	0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,120	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
⚠ ...3 D811S	AA96-00276A	ASSY H/S;-,BRIDGE,AA62-00052A,RBV606,WAS	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0083	0402-000549	DIODE-BRIDGE;RBV606,600V,6A,-,BK	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA60-30003A	WASHER;T1.5,SBHG-1	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4	AA62-00052A	HEAT SINK-PS;-,-,-,SILVER,HOLE 18.5mm, 2	S.N.A
⚠ ...3 IC421	AA96-00475B	ASSY H/S;SILICON-OIL,FMLG-12S(4),AA62-00	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0083	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
....4 IC012	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	S.N.A
...3 IC301	AA96-00623A	ASSY H/S;-,POWER,AA62-00056A,LA7845	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0088	1204-000517	IC-VERTICAL DEF.;LA7845,SIP,7P,-,PLASTIC	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-00056A	HEAT SINK-PS;-,-,T1.0,-,41*35*70,D2,-,-,	S.N.A
...3 Q431	BH99-00033H	ASSY HEAT/SINK;BH62-00038A,SPRING,FJL692	S.N.A
....4 T0083	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
....4 T0060	BH61-70003A	SPRING ETC;CVT4857,STS304-W1/2H,W3.8,-,L	S.N.A
....4 T0090	0502-001230	TR-POWER;FJL6920YDTU,N,200000MW,TO-264 F	
....4 CIS	BH62-00038B	HEAT SINK-FBT;COMMANDO,A1050S,T2.0,85*80	S.N.A
....4 CIS	BH73-00028A	SILICON/RUBBER-HS;CDT ALL,SILICON,26*33*	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
⚠ ...3 TS801S	BP26-00001A	TRANS SWITCHING-POWER;19B012,P55A,HCM421	
⚠ ...3 T801S	BP26-00002A	TRANS SWITCHING;EER5345,P55A,160V~280V,P	
...3 T0076	BP39-00014A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1007	
...3	BP39-00017A	LEAD CONNECTOR;P55A/HCM4215W,UL1617#22,U	
....4 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	BP97-00283A	ASSY AUTO;0	S.N.A
....4 D477	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D478	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D479	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 DR401S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 DR402S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D301	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D385	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D436	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D442	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D443	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DS804	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
....4 DS802	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
....4 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 T0083	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-001286	DIODE-RECTIFIER;RP1H,2000V,.1A,-,TP	
....4 T0083	0402-001443	DIODE-RECTIFIER;EGP20K,800V,2A,DO-15,TP	
....4 DZ016	0403-000704	DIODE-ZENER;TZP7.5B,7.5V,7.5-8.4V,1W,DO-	
....4 DZ016	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
....4 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4 DZ016	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
....4 DZ016	0403-001167	DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	
....4 DZ016	0403-001167	DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	
....4 DZ016	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
....4 DZ016	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
....4 DZ016	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
....4 DZ016	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
....4 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ016	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
....4 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DZ016	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	

Loc. No.	Code No.	Description ; Specification	Remark
....4 DZ016	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
....4 DS805	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
⚠ 4 QR401S	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q482	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q432	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q461	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q471	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q474	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q481	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q851	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QS801	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QS802	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q301	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q381	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q382	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q401	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q451	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q421	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q402	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 IC012	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
⚠ 4 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
....4 R811	2001-000002	R-CARBON(S);200KOHM,5%,1/2W,AA,TP,6.4X2.	
....4 R812	2001-000002	R-CARBON(S);200KOHM,5%,1/2W,AA,TP,6.4X2.	
....4 R125	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
....4 R125	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R308	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4 R470	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R422	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R836	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R496	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS808	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS804	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R855	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS803	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R439	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R438	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R834	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000745	R-CARBON;4.7OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS807	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
⚠ 4 RR401S	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R854	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R839	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R413	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R497	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R434	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R408	2001-001103	R-CARBON(S);20KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R837	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS802	2001-001124	R-CARBON(S);3.9OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R431	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R410	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS806	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R459	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R851	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP,2.4X6.	
⚠ 4 RX801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 4 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
....4 R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R425	2003-000417	R-METAL OXIDE(S);1.2Kohm,5%,3W,AA,TP,6x1	
....4 R832	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
....4 R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R429	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
....4 R310	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
....4 R460	2003-002044	R-METAL OXIDE(S);100ohm,5%,1W,AF,TP,2.5x	
....4 R427A	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
....4 R427	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
....4 R426	2003-002153	R-METAL OXIDE;4.7OHM,5%,2W,AG,TP,6X16MM	
....4 R443A	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
....4 R443	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
....4 R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP,4.3X12	
....4 R421	2003-002159	R-METAL OXIDE;150OHM,5%,1W,AG,TP,4.3X12M	
....4 R466	2004-000531	R-METAL;20Kohm,1%,1/2W,AA,TP,3.3x9mm	
....4 R024	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R024	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R024	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R024	2004-001408	R-METAL(S);91Kohm,1%,1/2W,AA,TP,2.4x6.4m	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
....4 R024	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
....4 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R024	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-004029	R-METAL(S);10Kohm,1%,1/2W,AA,TP,2.5x6.5m	
....4 R024	2004-004029	R-METAL(S);10Kohm,1%,1/2W,AA,TP,2.5x6.5m	
....4 R024	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
....4 R465	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R449	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R447	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R445	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R441	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R442	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R442A	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R440	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
....4 R424	2008-000289	R-FUSIBLE(S);1ohm,5%,1W,AA,TP,3.9x10mm	
....4 R307	2008-000290	R-FUSIBLE(S);2.4ohm,5%,2W,AF,TP,3.9x10mm	
....4 R306	2008-000290	R-FUSIBLE(S);2.4ohm,5%,2W,AF,TP,3.9x10mm	
....4 R486	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
....4 R838	2008-001053	R-FUSIBLE;22ohm,5%,1/2W,AF,TP,2.5x6.5mm	
....4 R437	2008-001087	R-FUSIBLE(S);1.8ohm,5%,2W,AG,TP,3.9x12mm	
....4 R485	2008-001137	R-FUSIBLE(S);3.3ohm,5%,1W,AF,TP,3.9x10mm	
....4 R462	2008-001145	R-FUSIBLE;4.7OHM,5%,1/2W,AF,TP,2.5X6.5MM	
....4 R405	2009-001109	R-TEMPERATURE;240ohm,5%,1/4W,AA,TP,2.3x6	
⚠ 4 RR471S	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
⚠ 4 RR402S	2103-001086	VR-SEMI;100KOHM,25%,0.3W,TOP	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000146	C-CERAMIC,DISC;0.1NF,5%,50V,SL,TP,5X3.5M	
....4 C598	2201-000146	C-CERAMIC,DISC;0.1NF,5%,50V,SL,TP,5X3.5M	
....4 C598	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
....4 C598	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
....4 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
....4 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
....4 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000370	C-CERAMIC,DISC;0.22NF,10%,50V,Y5P,TP,4X3	
....4 C598	2201-000379	C-CERAMIC,DISC;22NF,+80-20%,50V,Y5V,TP,9	
....4 C598	2201-000406	C-CERAMIC,DISC;0.27NF,10%,2KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000558	C-CERAMIC,DISC;0.47NF,10%,50V,Y5P,TP,5X3	
....4 C478	2301-000020	C-FILM,PEF;27nF,5%,100V,TP,7.3x4x12.5mm,	
....4 C479	2301-000200	C-FILM,PEF;2.2nF,5%,200V,TP,11.0x6.0x9.0	
....4 C477	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
....4 CS801	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
....4 C493	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
....4 C412	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C831	2301-001216	C-FILM,PPF;47nF,5%,630V,TP,20x14.5x22,7.	
....4 C432	2303-000002	C-FILM,PPF;8.2nF 5% 400V TP 19X18X7,7.5m	
....4 C438	2303-000002	C-FILM,PPF;8.2nF 5% 400V TP 19X18X7,7.5m	
....4 C460	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7,7.	
....4 C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C487	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
....4 C309	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
....4 C871	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
....4 C865	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4 C303	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4 C301	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4 C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
....4 C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C428	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C701	2401-000164	C-AL;1000uF,20%,25V,WT,TP,12.5x20,5	
....4 C701	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
....4 C701	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
....4 C701	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000698	C-AL;2200uF,20%,16V,WT,TP,12.5x25,5	
....4 C701	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
....4 C701	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
....4 C701	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
....4 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
....4 C701	2401-001486	C-AL;47uF,20%,160V,HR,TP,13x20mm,5m	
....4 C701	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
....4 C701	2401-001622	C-AL;6.8uF,20%,50V,BP,TP,16x25mm,7.	
....4 C701	2401-001625	C-AL;6.8uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-001655	C-AL;680uF,20%,25V,GP,TP,10x20,5	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-002211	C-AL;1000uF,20%,35V,LZ,TP,13x25mm,5	
....4 C701	2401-002216	C-AL;2200uF,20%,35V,GP,TP,16x25,7.5	
....4 C701	2401-002216	C-AL;2200uF,20%,35V,GP,TP,16x25,7.5	
....4 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
....4 C701	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
....4 C701	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-003114	C-AL;4.7uF,20%,250V,WT,TP,10x16,5	
....4 J152	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
....4 J130	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
....4 L431	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
....4 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
⚠ 4 FD801S	3601-000120	FUSE-AXIAL LEAD;125V,2.5A,FAST-ACTING,GL	
⚠ 4 FD871S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FD854S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FD805S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FD802S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
⚠ 4 FD855S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
....4 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
....4 EY52	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY53	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY54	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY55	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY51	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY42	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY41	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY40	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY63	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY62	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY61	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY60	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY59	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY58	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY57	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY56	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL08	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL07	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL06	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL05	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL04	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL03	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL02	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY39	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL16	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL15	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL14	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL10	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL11	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL12	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL13	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY38	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY37	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY36	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY67	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY66	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY65	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY64	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY50	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY49	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY35	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 EY25	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY24	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY23	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY22	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY21	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY20	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY19	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY34	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY31	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY30	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY29	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY28	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY27	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY26	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY70	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY92	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY91	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY90	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY89	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY88	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY87	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY86	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY99	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY98	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY97	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY96	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY95	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY94	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY93	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY85	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY77	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY76	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY75	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY74	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY73	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY72	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY71	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY84	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY83	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY82	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY81	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY80	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY79	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY78	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY18	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY119	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY118	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY117	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY116	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY115	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY114	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY113	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY126	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY125	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY124	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY123	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY122	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY120	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY12	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY11	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY102	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY101	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY100	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY10	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY08	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY109	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY108	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY107	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY106	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY105	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY104	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY103	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY127	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY150	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY15	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 EY149	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY148	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY147	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY142	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY141	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY17	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY16	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY155	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY154	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY153	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY152	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY151	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY140	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY133	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY132	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY131	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY130	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY13	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY129	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY128	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY14	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY139	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY138	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY137	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY134	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY135	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY136	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 GT404	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT805	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT806	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT810	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT811	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT14	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT15	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT16	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT17	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT33	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT34	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT35	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT433	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 R801	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4 C598	2201-000991	C-CERAMIC,DISC;0.56NF,10%,2KV,Y5P,TP,7.5	
....4 R831	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
....4 C701	2401-001190	C-AL;330uF,20%,50V,GP,TP,10x20mm,5m	
⚠ 4 RS801S	3601-000102	FUSE-AXIAL LEAD;125V,1A,FAST-ACTING,GLAS	
....4 PCB	AA41-00824C	PCB-SUB;SP42W5HC,CEM-1,1L,B,1.6T,330X245	S.N.A
....4 R833	2009-001096	R-METAL PLATE;0.07ohm,5%,5W,CL,BK,5x14x1	
....4 Q409	0505-001723	FET-SILICON;FQP630TSTU,N,200V,9A,0.4OHM,	
....4 Q409	0505-001723	FET-SILICON;FQP630TSTU,N,200V,9A,0.4OHM,	
....4 C598	2201-000138	C-CERAMIC,DISC;0.1NF,10%,50V,Y5P,TP,4X4M	
....4 R024	2004-005051	R-METAL(S);2.2KOHM,1%,1/2W,AA,TP,2.4X6.4	
⚠ ...3 CX802S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
⚠ ...3 CX803S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
⚠ ...3 IC831S	AA96-00275N	ASSY H/S;,AA62-00051A,STR-X6459,SP42WHP	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4 CIS	AA62-00051A	HEAT SINK-PS;-,-,-,SILVER,HOLE 31mm,ALL,	S.N.A
....4 IC063	BP13-00004A	IC HYBRID;STR-X6459A,COMMANDO,7,-20 TO +	
...3	AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3	AA65-00011B	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3 C832	2301-001418	C-FILM,MPPF;1.5nF,5%,2kV,TP,29x7x13.5mm,	
...3 R384	2002-001079	R-COMPOSITION;470Kohm,5%,1/2W,AA,TP,4x10	
...3 Q473	BP96-00006B	ASSY HEAT SINK P;HS,SCREW,IRF640B,2SC412	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 T0090	0502-001100	TR-POWER;2SC4125,NPN,70W,TO-3PML,BK,8-	
....4 Q409	0505-001722	FET-SILICON;IRFS640B,N,200V,18A,0.18OHM,	
....4 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4 CIS	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
....4 CIS	BP62-00001A	HEAT SINK;COMMANDO,A1050P,T2.0,W62.0,H50	S.N.A
..2 T0146	BP94-00301A	ASSY PCB MISC-SUB AMP;SP43T7HFX/XEF,J54A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 C701	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3 CN906	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
...3 T0076	AA39-20029D	LEAD CONNECTOR-ASSY;,7P,500,67096-007,S,	
...3 IC601	AA96-00623E	ASSY H/S;SCREW,MAIN,AA62-00056A,TDA7265,	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0124	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-00056A	HEAT SINK-PS;-,-,T1.0,-,41*35*70,D2,-,-	S.N.A
...3	BP97-00195A	ASSY AUTO;0	S.N.A
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS612	2001-001050	R-CARBON(S);1.5KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS624	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RS611	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RS609	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS608	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS607	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS606	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS605	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS604	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS603	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS602	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 CS613	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 CS614	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 CS612	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CS611	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CS610	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
....4 PCB	AA41-00614B	PCB-SUB AMP;SVP-47W3HRT,FR-1,1L,B,1.6T,2	S.N.A
....4 EL01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EL02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
..2 T0130	BP94-00354A	ASSY PCB MISC-SPK TERMINAL;SP42W5HFX/XEF	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 JA101	3716-001192	TERMINAL-BLOCK;-,6P,5MM,-,-	
...3 ESP+TB	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	S.N.A
...3 T0076	AA39-20052D	LEAD CONNECTOR-ASSY;,4P,700,YBNH025-04,Y	
...3 PCB	AA41-00811A	PCB-SPK TERMINAL;SP42W5HC,FR-1,1L,A,1.6T	S.N.A
...3 T0092	BP96-00038K	ASSY COVER P-TERMINAL,ANT;SP43T7HF,HIPS	S.N.A
....4	AA64-02837B	INLAY-TERMINAL,PAL;42W5,COMMANDO,PS SHEE	
S.N.A			
....4	AA65-00023A	TERMINAL-BOARD,ANT;,HIPS V0,BLK	S.N.A
...3	AA61-20129A	HOLDER-WIRE;-,NYLON-66,-,-,-,NTR,DAFC-25	S.N.A
..2 T0094	BP94-00392A	ASSY PCB MISC-CG AMP;ST43T8HF,J54A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003046	CONNECTOR-HEADER;BOX,9P,1R,2.5MM,STRAIGH	
...3	AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3 T0076	BP39-00005A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL2547	
...3 T0076	BP39-00015A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1185	
...3	BP61-00076A	HOLDER-PUSH,A;42W5,NYLON6.6,NATURAL	S.N.A
...3	BP61-00077A	HOLDER-PUSH,B;42W5,NYLON6.6,NATURAL	S.N.A
...3 CZ101	BP96-00005A	ASSY HEAT SINK P;BP62-00002A,SCREW,STK39	S.N.A
....4 T0081	6003-001021	SCREW-TAPTITE;RH,+,B,M3,L15,ZPC(YEL),SWR	S.N.A
....4 CIS	BP62-00002A	HEAT SINK;COMMANDO,A1050P,T2.0,W62.0,H14	S.N.A
....4 CIS	BP62-00008A	HEAT SINK;COMMANDO CG AMP,AL6063,T2.0,W1S	N.A
....4 CIS	BP73-00002A	SILICON/RUBBER;COMMANDO CG AMP,SILICON ,	S.N.A
....4 T0074	1201-001225	IC-VIDEO AMP;392,SIP,22P,-,TRIPLE,-,PLAS	
...3	BP97-00380A	ASSY AUTO;0	S.N.A
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ109	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ108	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ107	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ106	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ105	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ104	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R857	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RZ142	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ143	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ144	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ145	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ146	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ147	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ123	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ124	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ125	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ128	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ127	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ126	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ132	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ132A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ148	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ148A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ129	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ129A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RFZ50	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ51	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ52	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ53	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ19	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ20	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ21	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ22	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 CZ114	2202-000561	C-CERAMIC,MLC-RADIAL;0.68NF,5%,50V,C0G,T	
....4 CZ113	2202-000561	C-CERAMIC,MLC-RADIAL;0.68NF,5%,50V,C0G,T	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C701	2401-000183	C-AL;1000uF,20%,35V,WT,TP,12.5x25,5	
....4 C701	2401-000183	C-AL;1000uF,20%,35V,WT,TP,12.5x25,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 LZ112	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ111	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ110	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ109	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ108	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ107	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
⚠ 4 FD101S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FD102S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
....4 ELZ01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 ELZ02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 ELZ03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 0	AA41-00601C	PCB;HCM4215W,PCB,CEM-1,1L,C,1.6,245X245,	S.N.A
....4 SGZ101	4715-000106	SURGE ABSORBER;300V,210-390V,-,-,AXIAL	S.N.A
..2 T0073	BP94-00413A	ASSY PCB MAIN;SP43T6HF1X/BWT,J54A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 IC106	1001-000223	IC-VIDEO SWITCH;TEA5114A,-,DIP,16P,334MI	
...3 IC802	1203-000119	IC-NEGA.FIXED REG.;7905,TO-220,3P,-,PLAS	
...3 IC012	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
...3 C701	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3 C701	2401-001068	C-AL;3300uF,20%,50V,GP,BK,22x40,10	
...3 X601	2801-004020	CRYSTAL-UNIT;18.432MHz,30ppm,28-AAM,12pF	
...3 CN902	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
...3 CN902	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
...3 CN902	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
...3 CN902	3703-001187	CONNECTOR-BACK PANEL;64P,2R,FEMALE,STRAI	
...3 CN906	3711-003046	CONNECTOR-HEADER;BOX,9P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3 CN906	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
...3 CN906	3711-004946	CONNECTOR-HEADER;BOX,15P,1R,2.5MM,STRAIG	
...3 JA702	3722-000183	JACK-SCART;21P,4mm,SN,BLK,NO	
...3 JA701	3722-000195	JACK-SCART;42P,-,SN,BLK,NO	
...3 JA705	3722-001802	JACK-PIN;2P,8.3PI,NI,WHT/RED,-	
...3 L802	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L801	AA29-00004A	FILTER LINE NOISE;-,20UH,3A,AC80-260V,TQ	
...3	AA39-30007A	CBF IF;-,T,100mm,1365#26	
...3 TU03	AA40-00083A	TUNER;TCLS3101PD16A(S),PAL B/G,D/K,I,M,1	
...3 TU02	AA40-00084A	TUNER;TCPS3000PC16B(S),PAL ,181CH,38.9MH	
...3 CG	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 MICOM	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 MICOM	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 CG	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3	AA63-00608A	SHIELD CASE;HERCULES TOP,SPTE,T0.5,W140.	S.N.A
...3	AA63-00610A	SHIELD CASE;COMMANDO,SPTE,T0.5,W141.5,H1	S.N.A
...3 IC801	AA96-00475C	ASSY H/S;SILICON-OIL,KA278R09,KA7808,AA6	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0087	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
....4 T0123	1203-002003	IC-VOLTAGE REGULATOR;278R09,TO-220,4P,-,	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	S.N.A
....4 T0123	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
...3 IC601	AA96-00623E	ASSY H/S;SCREW,MAIN,AA62-00056A,TDA7265,	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0124	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-00056A	HEAT SINK-PS;-,-,T1.0,-,41*35*70,D2,-,-,	S.N.A
...3 T0104	BP95-00068A	ASSY SUB-MICOM;SVP-47W3HRT,P55A	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
....4 Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
....4	BP97-00159A	ASSY SMD;0	S.N.A
.....5D905	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5D904	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5D903	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5D900	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5D901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5D902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	

Loc. No.	Code No.	Description ; Specification	Remark
.....5Q911	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5Q910	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5Q908	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5Q907	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5Q906	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5Q905	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5Q903	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5IC112	1103-001195	IC-EEPROM;24C64,8Kx8Bit,SOP,8P,150MIL,10	
.....5IC113	1105-001305	IC-DRAM;4S641632,1Mx16x4Bit,TSOP,54P,400	
.....5T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....5T0123	1203-002351	IC-VOLTAGE REGULATOR;LF25C,DPAK,3P,240MI	
.....5R939	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5C949	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R981	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R977	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R963	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R962	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R985	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R986	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R992	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R994	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R996	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R910	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R911	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R921	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R922	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R923	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R949	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R929	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R928	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R924	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R955	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R956	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R944	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R945	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R946	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R947	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R925	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....5R948	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R927	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R907	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R908	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R958	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....5R957	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....5R979	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R978	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R976	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R975	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R974	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R993	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R991	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R983	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R982	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R980	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R973	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R918	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R917	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R913	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R906	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R905	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R972	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R971	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R970	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R933	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R932	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R961	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R968	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R984	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R988	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R995	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R909	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R914	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R915	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R916	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R930	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R936	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R942	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5R943	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R965	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5R964	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5R953	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
.....5R954	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
.....5R931	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5R904	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5R903	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5R967	2007-000129	R-CHIP;27Kohm,5%,1/10W,TP,1608	
.....5R966	2007-000129	R-CHIP;27Kohm,5%,1/10W,TP,1608	
.....5R902	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5R901	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5R997	2007-000857	R-CHIP;4.3Kohm,1%,1/16W,DA,TP,1608	
.....5C950	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000405	C-CERAMIC,CHIP;0.18NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000815	C-CERAMIC,CHIP;0.033NF,5%,50V,C0G,TP,160	
.....5C120	2203-000815	C-CERAMIC,CHIP;0.033NF,5%,50V,C0G,TP,160	
.....5C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5C954	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5C905	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5C909	2402-001086	C-AL,SMD;100UF,20%,16V,WT,TP,6.6X6.6X5.3	
.....5C935	2402-001155	C-AL,SMD;47UF,20%,16V,WT,TP,6.3X5.2MM	
.....5C940	2402-001155	C-AL,SMD;47UF,20%,16V,WT,TP,6.3X5.2MM	
.....5C943	2402-001155	C-AL,SMD;47UF,20%,16V,WT,TP,6.3X5.2MM	
.....5C945	2402-001155	C-AL,SMD;47UF,20%,16V,WT,TP,6.3X5.2MM	
.....5C910	2402-001155	C-AL,SMD;47UF,20%,16V,WT,TP,6.3X5.2MM	
.....5C912	2402-001155	C-AL,SMD;47UF,20%,16V,WT,TP,6.3X5.2MM	
.....5C914	2402-001155	C-AL,SMD;47UF,20%,16V,WT,TP,6.3X5.2MM	
.....5C916	2402-001155	C-AL,SMD;47UF,20%,16V,WT,TP,6.3X5.2MM	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
.....5PCB	BP41-00008A	PCB-MICOM;SP42W5HF,FR-4,2L,A,1.6T,180X24	S.N.A
.....5R951	2007-000643	R-CHIP;270ohm,5%,1/16W,DA,TP,1608	
.....5R952	2007-001002	R-CHIP;510ohm,5%,1/10W,TP,1608	
.....5IC904	1203-001814	IC-VOL. DETECTOR;7025,SOT-89,4P,98MIL,PL	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-001607	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,1608	
.....5R969	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
.....5IC901	1204-002105	IC-DECODER;SDA6001-B12,MQFP,128P,28x28mm	
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 IC902	1102-001126	IC-EPROM;M27V160,2MX8BIT,DIP,42P,570MIL,	
....4 CN902	3703-001175	CONNECTOR-BACK PANEL;64P,2R,MALE,ANGLE,A	
....4 X901	2801-004071	CRYSTAL-UNIT;6MHZ,30PPM,28-AAM,20PF,40OH	
...3 T0095	BP95-00091A	ASSY SUB-PRO SCAN;SP43T7HF,J54A,MAGA TTX	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 FC48	2305-000011	C-FILM,MPEF;470nF,5%,250V,TP,21.5X13.0X7	
....4 FC59	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
....4 FC58	2301-001664	C-FILM,MPE-PPF;100nF,3%,50V,TP,20x16x8.5	
....4 EX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
....4 T0122	2802-001177	RESONATOR-CERAMIC;2.696MHZ,0.4%,BK,10X4.	
....4 CN902	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
....4 CN902	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
....4 CN906	3711-001164	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,ANGLE,-	
....4	BP97-00176A	ASSY SMD;SP43T7HF,J54A,MAGA TTX 2.0	S.N.A
.....5FD13	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5FD14	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5FD15	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5FD16	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5FD17	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5FD10	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5FD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5FD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5FD07	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5FD08	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5FD09	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5DZ016	0403-000746	DIODE-ZENER;RLZ3.9B,3.89-4.16V,500MW,LL-	
.....5DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5FQ13	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5FQ04	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5FQ03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5FQ02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5FQ08	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5FQ09	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5FQ12	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5PQ01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5FQ06	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5EQ13	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5EQ14	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5EQ15	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5FQ05	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5FQ07	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5IC104	0801-000662	IC-CMOS LOGIC;74HC123,MULTIVIBATOR,SOP,1	
.....5IC06	1203-001211	IC-VOL. DETECTOR;7027,SOT-89,3P,-,PLASTI	
.....5T0087	1203-002186	IC-POSI.FIXED REG.;18,DPAK,3P,240MIL,PLA	
.....5T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....5IC01A	1204-001938	IC-DECODER;VSP9407B-B11,MQFP,80P,14X14MM	
.....5IC118	1204-001989	IC-VIDEO PROCESS;CXA2165Q,QFP,64P,20X14M	
.....5EL07	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	
.....5EL06	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	
.....5EL05	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	
.....5EL04	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	
.....5FR57	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....5FR78	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....5FR79	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....5FR80	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....5FR88	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....5ER17	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5ER18	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5ER19	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5ER29	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5FR07	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5FR35	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5FR76	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5FR96	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5CR83	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5CR84	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5EC31	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5EC38	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5ER06	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5ER05	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5ER04	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5EC39	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5SC54	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5SC55	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5SR67	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5SR70	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5SR71	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5FR56	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR71	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR54	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR39	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR74	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5YR45	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5YR44	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5YR43	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5SR75	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR82	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR81	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR75	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR38	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR18	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR17	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR01	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR19	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR37	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR34	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR33	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR32	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR31	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR21	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5FR20	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5ER34	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5SR74	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5FR66	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5ER28	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5ER27	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5ER26	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5FR40	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5FR72	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....5FR73	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....5FR62	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....5FR45	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5FR44	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5ER92	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5ER91	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5FR42	2007-000086	R-CHIP;5.6Kohm,5%,1/10W,TP,1608	
.....5FR41	2007-000086	R-CHIP;5.6Kohm,5%,1/10W,TP,1608	
.....5PR01	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5FR60	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5FR22	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5FR09	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5FR58	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	
.....5PR02	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5ER25	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5ER24	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5ER23	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5ER22	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5ER21	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5ER20	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5FR77	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5FR63	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	
.....5FR70	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5FR46	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5FR47	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5FR15	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5FR14	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5FR13	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5FR12	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5FR11	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5FR10	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5SR73	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	
.....5FR36	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
.....5FR43	2007-000869	R-CHIP;4.7Kohm,1%,1/10W,TP,1608	
.....5ER14	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5ER70	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5ER71	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5ER72	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5EC35	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5EC36	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5EC37	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5ER01	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5ER03	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5ER08	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5ER09	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5ER10	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5ER11	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5ER15	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5ER16	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5C120	2203-000626	C-CERAMIC,CHIP;0.022NF,5%,50V,C0G,TP,160	
.....5C120	2203-000626	C-CERAMIC,CHIP;0.022NF,5%,50V,C0G,TP,160	
.....5C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....5C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....5C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....5C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....5C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....5C120	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
.....5C120	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
.....5C120	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
.....5FC09	2402-000170	C-AL,SMD;1uF,20%,50V,GP,TP,4.3x4.3x5.4,	
.....5PC18	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
.....5FC60	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
.....5FC29	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
.....5SC47	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5PC32	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5PC06	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5FC66	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5PC01	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5PC03	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5FC06	2402-000209	C-AL,SMD;22uF,20%,16V,WT,TP,5.3x5.3mm,1	
.....5FC63	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5FC62	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5FC45	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5FC12	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5FC04	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5PC12	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5PC10	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5PC09	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5PC08	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.2,-	
.....5PC07	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.2,-	
.....5FC31	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.2,-	
.....5CC49	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.2,-	
.....5EL12	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....5CL07	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5FL01	2703-001070	INDUCTOR-SMD;100uH,10%,4.5x3.2x3.2mm	
.....5G101	3301-001082	CORE-FERRITE BEAD;AB,60OHM,3.2X2.5X1.3MM	
.....5G101	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.....5G101	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.....5G101	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
.....5C120	2203-000896	C-CERAMIC,CHIP;4.7nF,10%,50V,X7R,TP,1608	
.....5C120	2203-001140	C-CERAMIC,CHIP;68nF,10%,16V,X7R,TP,1608,	
.....50	AA41-00610E	PCB;HCM4215W,PCB,4L,E,1.6,162*223,140*10	S.N.A
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3 IC808	BP96-00020G	ASSY HEAT SINK P;AA62-00045B,TAPTITE,SI-	S.N.A
....4 CIS	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4 CIS	AA62-00045B	HEAT SINK;COMMANDO,AL1050,T1.0,H45.0	S.N.A
....4 IC012	1203-000203	IC-POSI.ADJUST REG.;3050,TO-220,5P,-,PLA	
...3	BP97-00182A	ASSY AUTO;0	S.N.A
....4 D609	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D608	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D607	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D605	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D604	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D601	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D602	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D603	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ016	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
....4 DZ016	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
....4 DZ016	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
....4 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	

Loc. No.	Code No.	Description ; Specification	Remark
....4 Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q602	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q603	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 R125	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R808	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R810	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R811	2001-000107	R-CARBON(S);150KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R805	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-001000	R-CARBON;82KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R801	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R681	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R682	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R814	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
....4 R024	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
....4 R024	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
....4 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
....4 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
....4 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
....4 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
....4 R024	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
....4 R024	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
....4 C694	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 C695	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 C689	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C687	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C682	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
....4 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
....4 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-001261	C-AL;4.7uF,20%,50V,BP,TP,5x11mm,5mm	
....4 C701	2401-001261	C-AL;4.7uF,20%,50V,BP,TP,5x11mm,5mm	
....4 C701	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-003578	C-AL;1000uF,20%,10V,GP,TP,8x20mm,5	
....4 C701	2401-003578	C-AL;1000uF,20%,10V,GP,TP,8x20mm,5	
....4 C701	2401-003578	C-AL;1000uF,20%,10V,GP,TP,8x20mm,5	
....4 C701	2401-003578	C-AL;1000uF,20%,10V,GP,TP,8x20mm,5	
....4 L105	2701-000106	INDUCTOR-AXIAL;1.5uH,10%,3x7mm	
....4 L113	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L114	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L115	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L116	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L117	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L118	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L107	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L108	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L109	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L112	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L111	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L110	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L128	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L129	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L703	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L106	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L104	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L127	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L706	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	

Loc. No.	Code No.	Description ; Specification	Remark
....4 L705	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
....4 L102	2701-001040	INDUCTOR-AXIAL;10uH,10%,4.5x14mm	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 GT04	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT03	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT02	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT01	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	BP97-00156A	ASSY SMD;0	S.N.A
.....5DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5DZ016	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
.....5DZ016	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
.....5DZ016	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
.....5DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5Q712	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q711	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q709	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q708	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q713	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q714	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q715	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q716	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q707	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q107	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q108	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q701	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q702	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q703	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q704	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q705	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5Q706	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
.....5IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
.....5IC605	1001-001178	IC-AUDIO SWITCH;TEA6422D,AUDIO SWITCH ,S	
.....5IC705	1002-001048	IC-A/D&D/A CONVERTER;PCF8591T,8BIT,SOP,1	
.....5IC704	1002-001048	IC-A/D&D/A CONVERTER;PCF8591T,8BIT,SOP,1	
.....5DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
.....5DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
.....5R778	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R708	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R706	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R196	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R779	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R788	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R791	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R79B	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R904	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R117	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R129	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R170	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R187	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R195	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R194	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R193	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R188	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R908	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R909	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R910	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R911	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R627	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R646	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R647	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R703	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R626	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5R625	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R624	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R602	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R601	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R773	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R772	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R757	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R756	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R724	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R722	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R711	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R709	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R707	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R116	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R114	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R113	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R108	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R107	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R103	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R102	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R172	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R171	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R122	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R123	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R124	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R128	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R111	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R112	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R730	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....5R720	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....5R718	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....5R737	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R781	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R782	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R783	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R736	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R728	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R705	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R653	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R784	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R79A	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R798	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R797	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R793	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R790	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R787	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R786	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R785	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R637	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R636	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R631	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R630	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R603	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R189	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R175	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R106	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R638	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R652	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R651	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R650	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R648	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R640	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R641	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R642	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R643	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R654	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R655	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R755	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R750	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R688	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R771	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R774	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R780	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R611	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R604	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R614	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R621	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5R770	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R769	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R768	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R748	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R746	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R191	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	
.....5R190	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	
.....5R185	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	
.....5R176	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	
.....5R744	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....5R741	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....5R704	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5R716	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5R110	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
.....5R105	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
.....5R612	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....5R607	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....5R622	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....5R619	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....5R115	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5R609	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....5R608	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....5R615	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....5R616	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....5R760	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	
.....5R759	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	
.....5R758	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	
.....5R109	2007-000828	R-CHIP;39Kohm,1%,1/16W,DA,TP,1608	
.....5R104	2007-000828	R-CHIP;39Kohm,1%,1/16W,DA,TP,1608	
.....5R753	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5R751	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5R610	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5R605	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5R617	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5R620	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5R719	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R721	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R723	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R717	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R715	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R714	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R713	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R799	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R792	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R789	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R731	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R729	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R727	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R726	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R135	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R131	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R130	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R121	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R120	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R119	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R118	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R712	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R710	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R702	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R701	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R174	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R173	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R136	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R613	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....5R606	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....5R623	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....5R618	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000332	C-CERAMIC,CHIP;0.012NF,5%,50V,C0G,TP,160	
.....5C120	2203-000332	C-CERAMIC,CHIP;0.012NF,5%,50V,C0G,TP,160	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5L701	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5L704	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5L707	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5L708	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5L901	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5L902	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5L125	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5L126	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5L601	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5L602	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5L603	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5L604	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
.....5Q604	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5Q605	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....5PCB	AA41-00809B	PCB-MAIN;SP42W5,FR-4,2L,B,1.6T,245X245,P	S.N.A
.....5IC602	1204-002054	IC-SOUND PROCESSOR;MSP3452G-B3,PQFP,80P,	
.....5IC101	0904-001031	IC-I/O SUPPORT CHIP;8574,8BIT,S0P,16P,-,	
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
....4 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
....4 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
...3 T0093	BP95-00146F	ASSY SUB PCB-CONV MOD;,J54A,CG MOD	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 L01	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
....4 CN902	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
....4 CN906	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
....4	BP97-00513D	ASSY SMD;,P55A,CG MOD	S.N.A
.....5D13	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D12	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D11	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D10	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D14	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D15	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D16	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D17	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D18	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D01	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D02	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D03	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D04	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D05	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D09	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D08	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D07	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5D06	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5Q02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5Q03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5Q10	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.....5Q04	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.....5Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....5IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....5IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....5IC08	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	
.....5IC13	1001-001155	IC-ANALOG MULTIPLEX;NC7SB3157P6X,CMOS,SC	
.....5IC112	1103-001195	IC-EEPROM;24C64,8Kx8Bit,SOP,8P,150MIL,10	
.....5DU410	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
.....5DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5T0074	1201-001520	IC-VIDEO AMP;EL2250CS,SOIC,8P,150MIL,DUA	
.....5IC03	1203-001824	IC-VOL. DETECTOR;7042,SOT-89,3P,-,PLASTI	
.....5T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	

Loc. No.	Code No.	Description ; Specification	Remark
.....5IC17	1209-001163	IC-PLL;TLC2932IPWLE,SOP,14P,-,PLASTIC	
.....5R36	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....5R35	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....5R31	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....5R30	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....5R143	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R144	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R25	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R122	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R123	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R141	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5R136	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5R15	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5R24	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5R45	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5R46	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5R09	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5R10	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5R129	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5R134	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5R135	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5R59	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R65	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R71	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R77	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R91	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R17	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R20	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R47	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5R62	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R64	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R68	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R58	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R56	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R52	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R70	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R98	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R94	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R82	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R80	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R76	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R74	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R38	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R37	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R110	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R11	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R101	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R03	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R39	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R50	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R44	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R43	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R42	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R41	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R40	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5R128	2007-000079	R-CHIP;1.8Kohm,5%,1/10W,TP,1608	
.....5R81	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5R75	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5R69	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5R51	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5R57	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5R63	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5R109	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....5R66	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R61	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R60	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R55	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R54	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R79	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R78	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R73	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R72	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R67	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R49	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5R08	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R07	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R06	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R04	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R01	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R48	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R133	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R121	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R119	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R118	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5R86	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R92	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R93	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R96	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R97	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R85	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R113	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R114	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R115	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R83	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R84	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5R125	2007-000091	R-CHIP;12Kohm,5%,1/10W,TP,1608	
.....5R05	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
.....5R127	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
.....5R100	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	
.....5R32	2007-000119	R-CHIP;560ohm,5%,1/10W,TP,1608	
.....5R34	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5R29	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5R28	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5R117	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5R107	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5R33	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5R120	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5R90	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....5R89	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....5R88	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....5R87	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....5R108	2007-000381	R-CHIP;13Kohm,5%,1/10W,TP,1608	
.....5R139	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....5R138	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....5R137	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....5R99	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
.....5R95	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
.....5R126	2007-000857	R-CHIP;4.3Kohm,1%,1/16W,DA,TP,1608	
.....5R27	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R26	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5R116	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....5RN04	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RN05	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RN06	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RN01	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RN02	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5RN03	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....5C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5C120	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.....5C120	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.....5C120	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.....5C120	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.....5C120	2203-001245	C-CERAMIC,CHIP;0.082nF,5%,50V,NP0,TP,201	
.....5C38	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5C40	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5C70	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5C84	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5C14	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5C06	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5C03	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5C01	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5C80	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5OSC01	2804-001479	OSCILLATOR-CLOCK;24MHZ,100PPM,50PF,TP,5V	
.....5F103	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
.....5F103	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
.....5F103	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
.....5F103	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5T0119	AA09-00032A	IC MICOM;,TSC87251G2D-OTP,4.5 TO 5.5V,-	S.N.A
.....51	AA41-00717D	PCB (FR 4) 4L(AU);CONVERGENCE,FR-4,4,1.6	S.N.A
.....5IC125	BP13-00003A	IC ASIC;SDC12,128,-0.3 TO +3.8,0 TO 70,Q	
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
..2 T0098	BP94-00502L	ASSY PCB MISC-CONTROL;SP54T8,J54A,CONTRO	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 LEDY01	0601-001381	LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3 SWY08	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY07	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY06	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY05	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY01	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY03	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY04	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	
...3 CN906	3711-003353	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,ANGLE,	
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 RMY01	AA32-00012A	MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
...3 T0076	AA39-00223A	LEAD CONNECTOR-ASSY;,11P,800MM,67096-011	
...3 T0076	AA39-00259A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	
...3	BP97-00503V	ASSY AUTO;SP54T8,J54A,CONTROL	S.N.A
....4 DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 QY02	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
....4 QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
....4 RY07	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RY01	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RY09	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY08	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 0	AA41-00768C	PCB CONTROL;ST43T8,1L,1.6T,245x245,J54A,	S.N.A
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2 T0100	BP94-00558M	ASSY PCB MISC-A/V FRONT;SP54T8HFX/BWT,J5	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 SW101	3404-000208	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
...3 CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	
...3 CN906	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
...3 JK101	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3 JK102	3722-001164	JACK-PIN;3P,3.4mm,SN,WH:YE:RE,#16-22	
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 T0076	AA39-00260A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	
...3	AA97-07426A	ASSY AUTO-A/V FRONT;SP42W5HCX/XTT,J54A,C	S.N.A
....4 R125	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
....4 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 PCB	AA41-00499B	PCB-FRONT A/V;SVP-54T6SR,FR-1,1L,A,1.6T,	S.N.A
...3 CNW01A	BP39-00016B	LEAD CONNECTOR;HCL4715WB,UL2547#26,UL/CS	
...3 T0147	AA91-00762V	ASSY-JACK SIDE;54/62T8,SV704P,GUJU	
....4	AA61-00793E	HOLDER-SIDE AV;47H1,ABS HB,GRAY,SV-704P	S.N.A
....4 T0150	AA64-02085F	DOOR-AV;H1,ABS HB,GRAY,SV-704P	
....4	AA64-02086C	INLAY-AV;W3,PS SHEET,T0.5,J52A PAL	S.N.A
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A

ASSY ACCESSORY

1 M0016	BP92-00511V	ASSY ACCESSORY;SP43T8HFX/BWT,J54A,RUSSIA	S.N.A
..2	6801-001073	CARD-REGISTRATION;RUS,XEV,RUS,MOJO100,-	S.N.A
..2 T0116	AA39-40001B	CABLE RCA;,1500MM	
..2	AA68-00816B	CARD WARRANTY-01;,RUSSINA,2,W/P 120G,BOT	S.N.A
..2 T0269	AA68-01120A	MANUAL SERVICE;-,-,CIS,A4,6PAGE(FOLD),W/	S.N.A
..2	AA68-01402A	MANUAL-GOOD WILL LETTER;,CIS,B5,1PAGE,A/	S.N.A
..2	AA68-02290A	CARD WARRANTY;PJT ALL,W/P100(G),ENG,A5,1	S.N.A
..2 T0074	BP59-00008A	REMOCON;,TM65A,COMMOANDO,J54A,49,L/GRAY,	
...3 T0122	2802-000194	RESONATOR-CERAMIC;8MHz,1.0%,TP,8.5x4.5x5	
...3 T0119	AA09-00371A	IC MICOM;SZTM-839C R-52MX,28PIN,16KBYTE,	

Loc. No.	Code No.	Description ; Specification	Remark
..2	6902-000018	BAG PE;LDPE,T0.1,W280,L400,GRY,8,2-	S.N.A
..2 T0113	AA61-20126A	HOLDER-LEG;-,ABS,-,-,-,BLK,HB	
..2	AA69-30009C	BAG-SHEET;LDPE,T0.08,W150,L120,-,-,-	S.N.A
..2 CIS	BP68-00083A	MANUAL USERS;SP43T7HF,RU,W/P100G,J54A,B5	

ASSY P/MATERIAL

1	BP92-00526A	ASSY P/MATERIAL;SP54T8HGX/SAP,J57A	S.N.A
..2	AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	S.N.A
..2	AA61-20285A	HOLDER-BOX;3456,PP,-,-,-,WHT,VO	S.N.A
..2	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2	AA69-00305A	BAG AIR;ALL,LDPE,1000,500,CLR,	S.N.A
..2	AA69-00306A	BAG AIR;LDPE,-,1800,1000,CLR,ASSY,ALL,-	S.N.A
..2	AA69-00744L	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1650,H1	S.N.A

4. PCB Diagrams

4-1 MAIN PCB

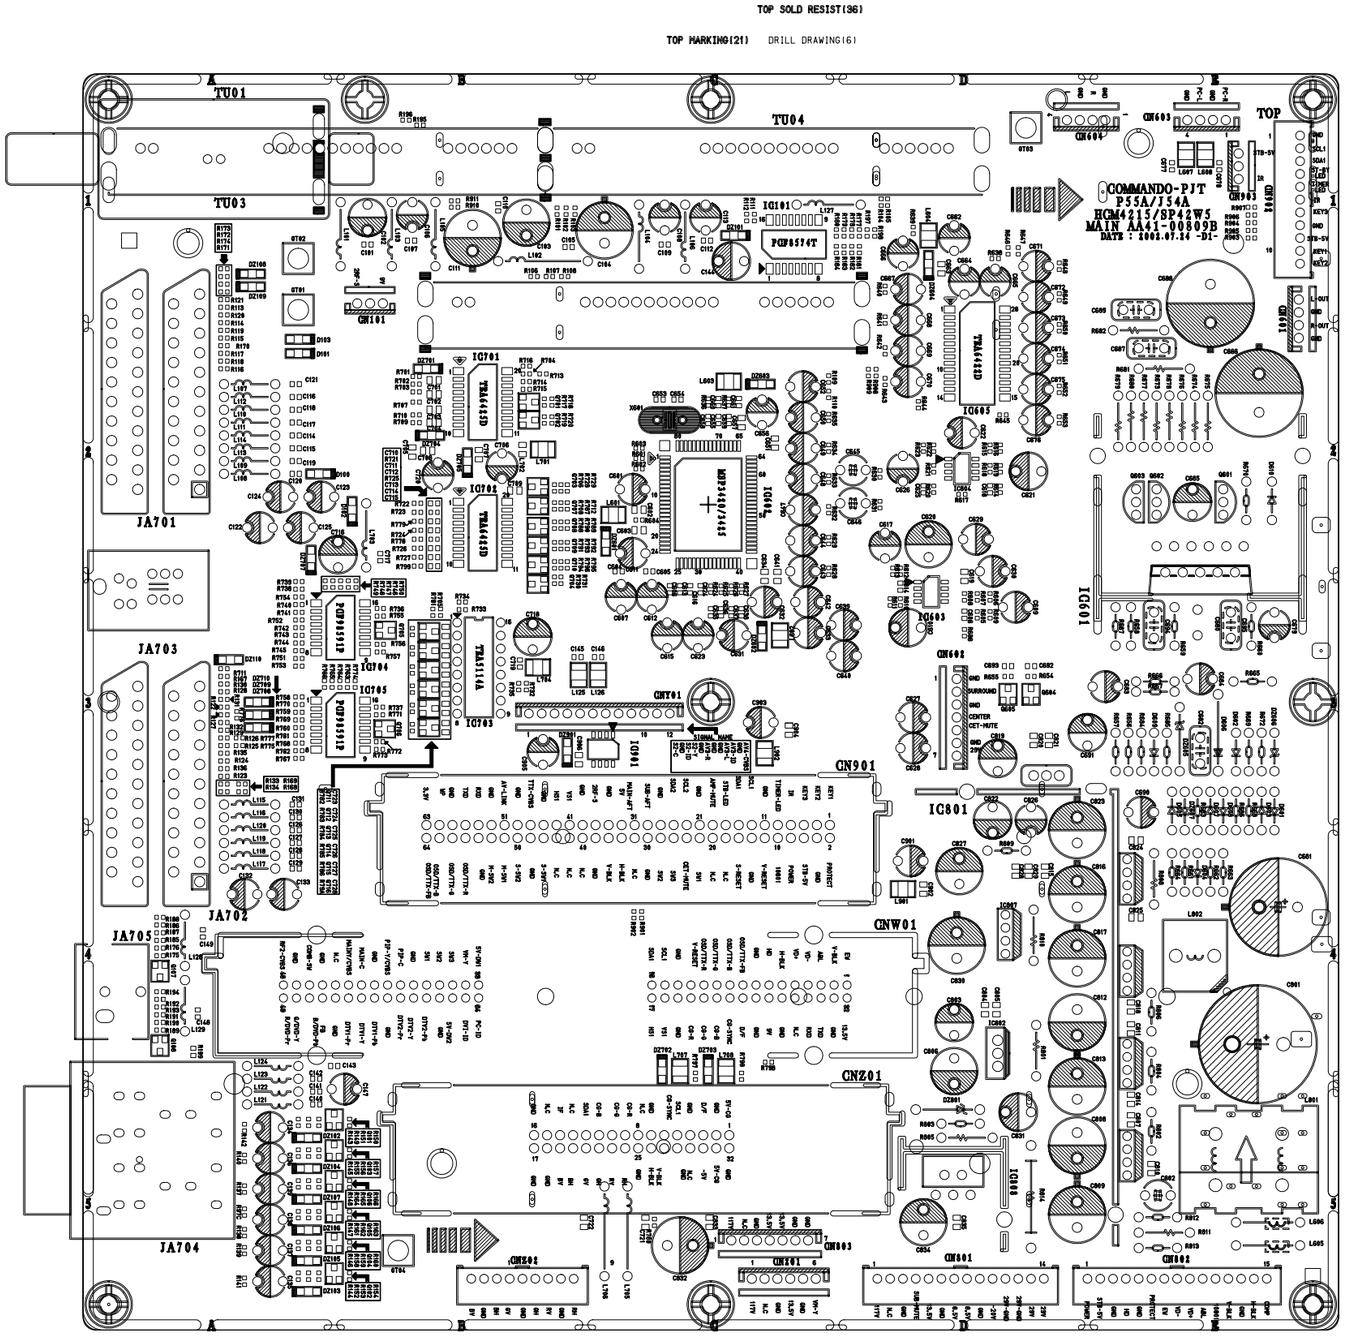

8-2 SUB PDB

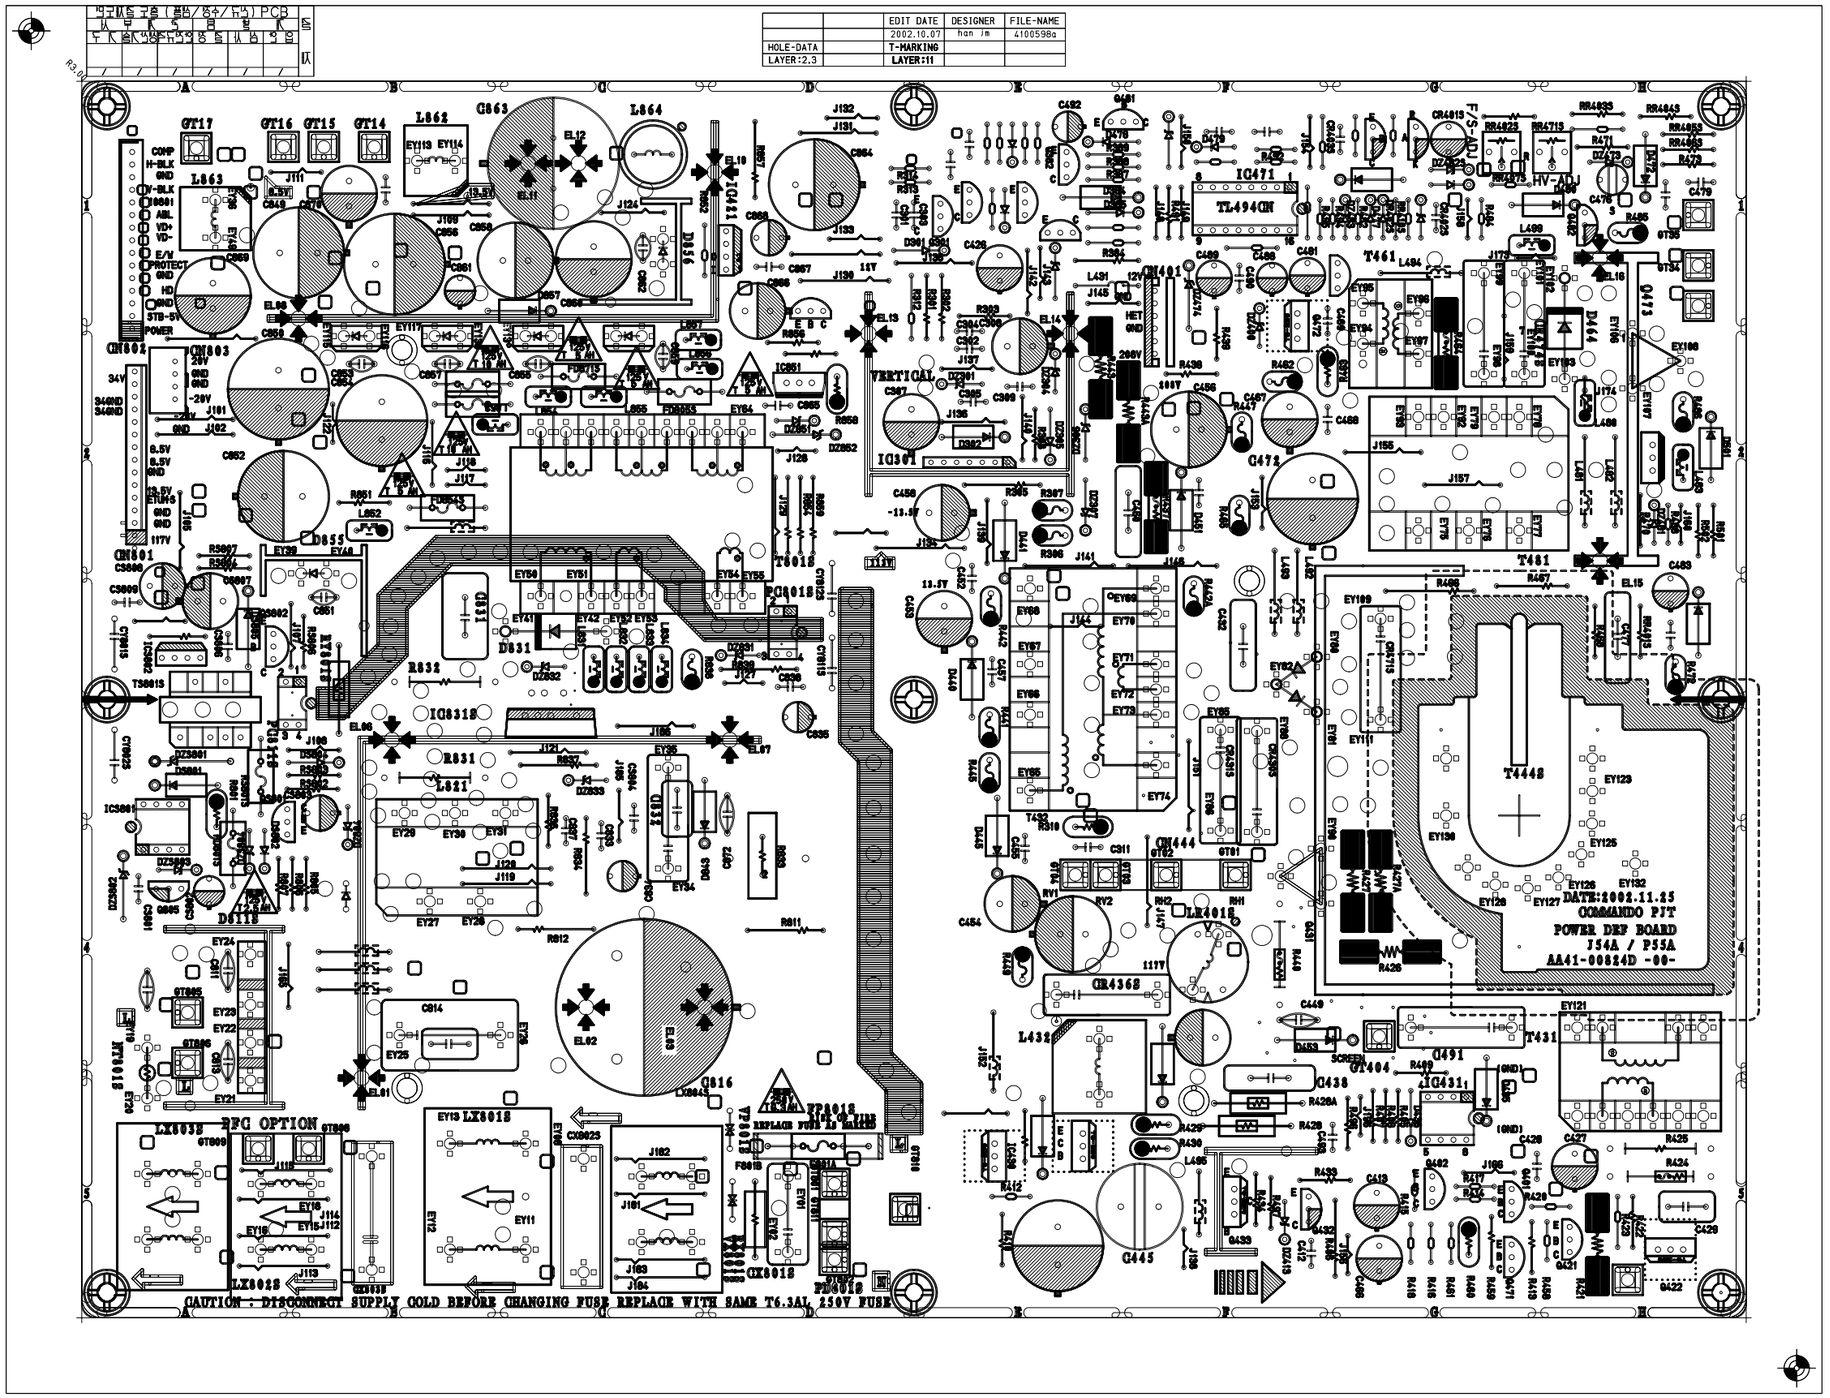
EDIT DATE
DESIGNER
FILE-NAME
2002.10.07
han jm
4100598a
HOLE-DATA
T-MARKING
LAYER:2.3
LAYER:11
IC471
TL494CN
T461
T481
T4448
T431
DATE:2001.11.25
COMMANDO PJT
POWER DEF BOARD
J54A / P55A
AA41-00824D -00-
2PC OPTION
CAUTION : DISCONNECT SUPPLY COLD BEFORE CHANGING FUSE REPLACE WITH SAME T6.3AL 250V FUSE

5. Schematic Diagrams

5-1 MAIN 1

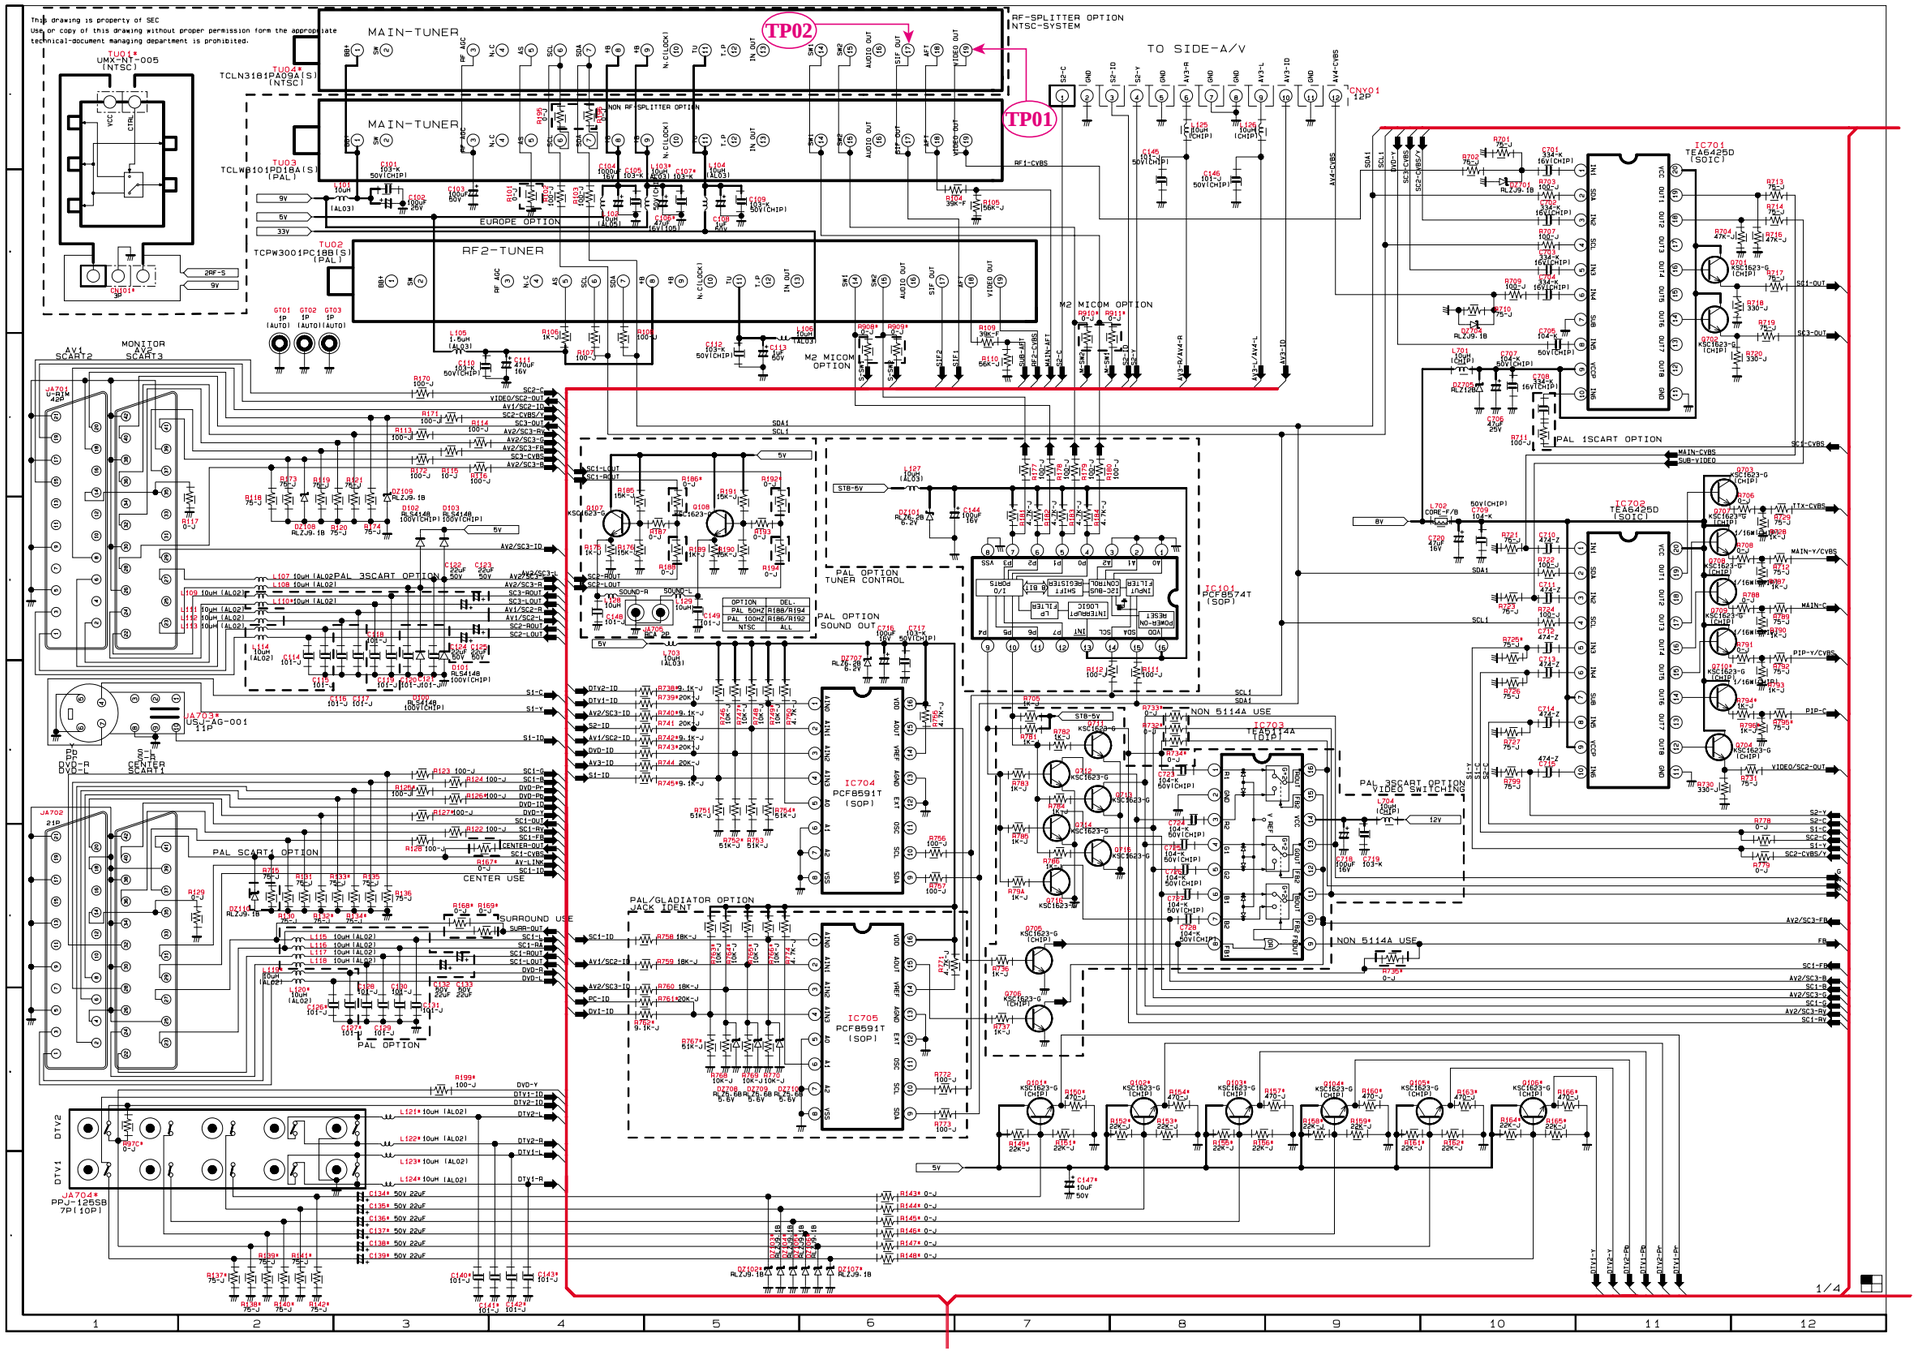

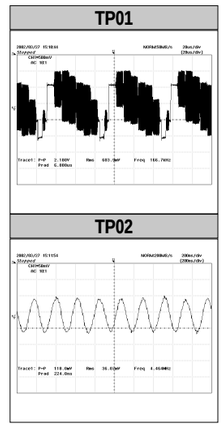

5-2 MAIN 2

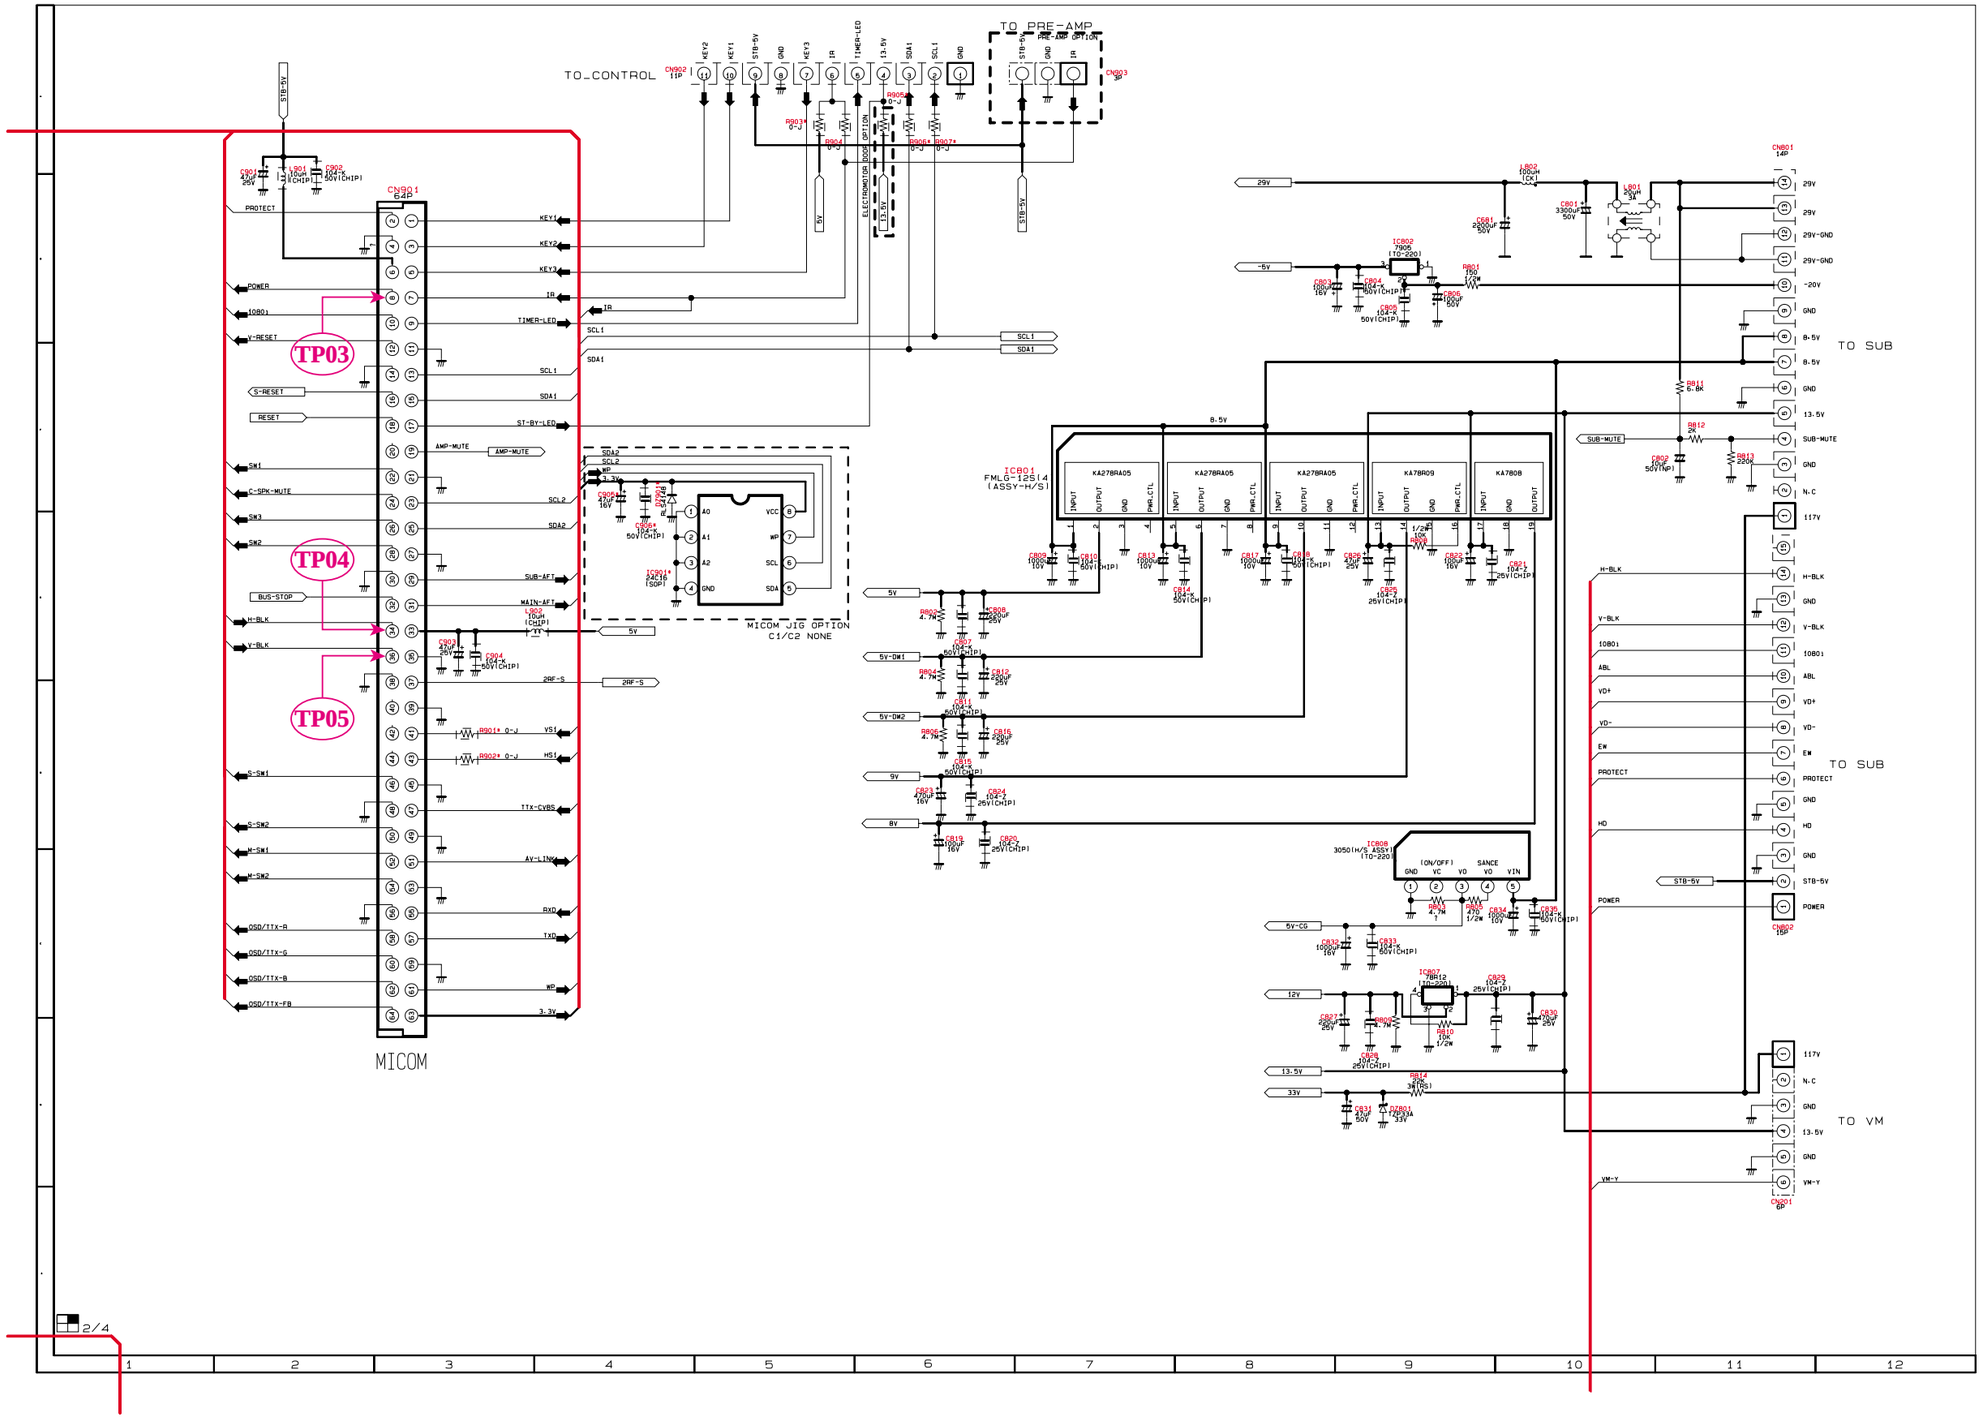

TP03



TP04



TP05



5-3 MAIN 3

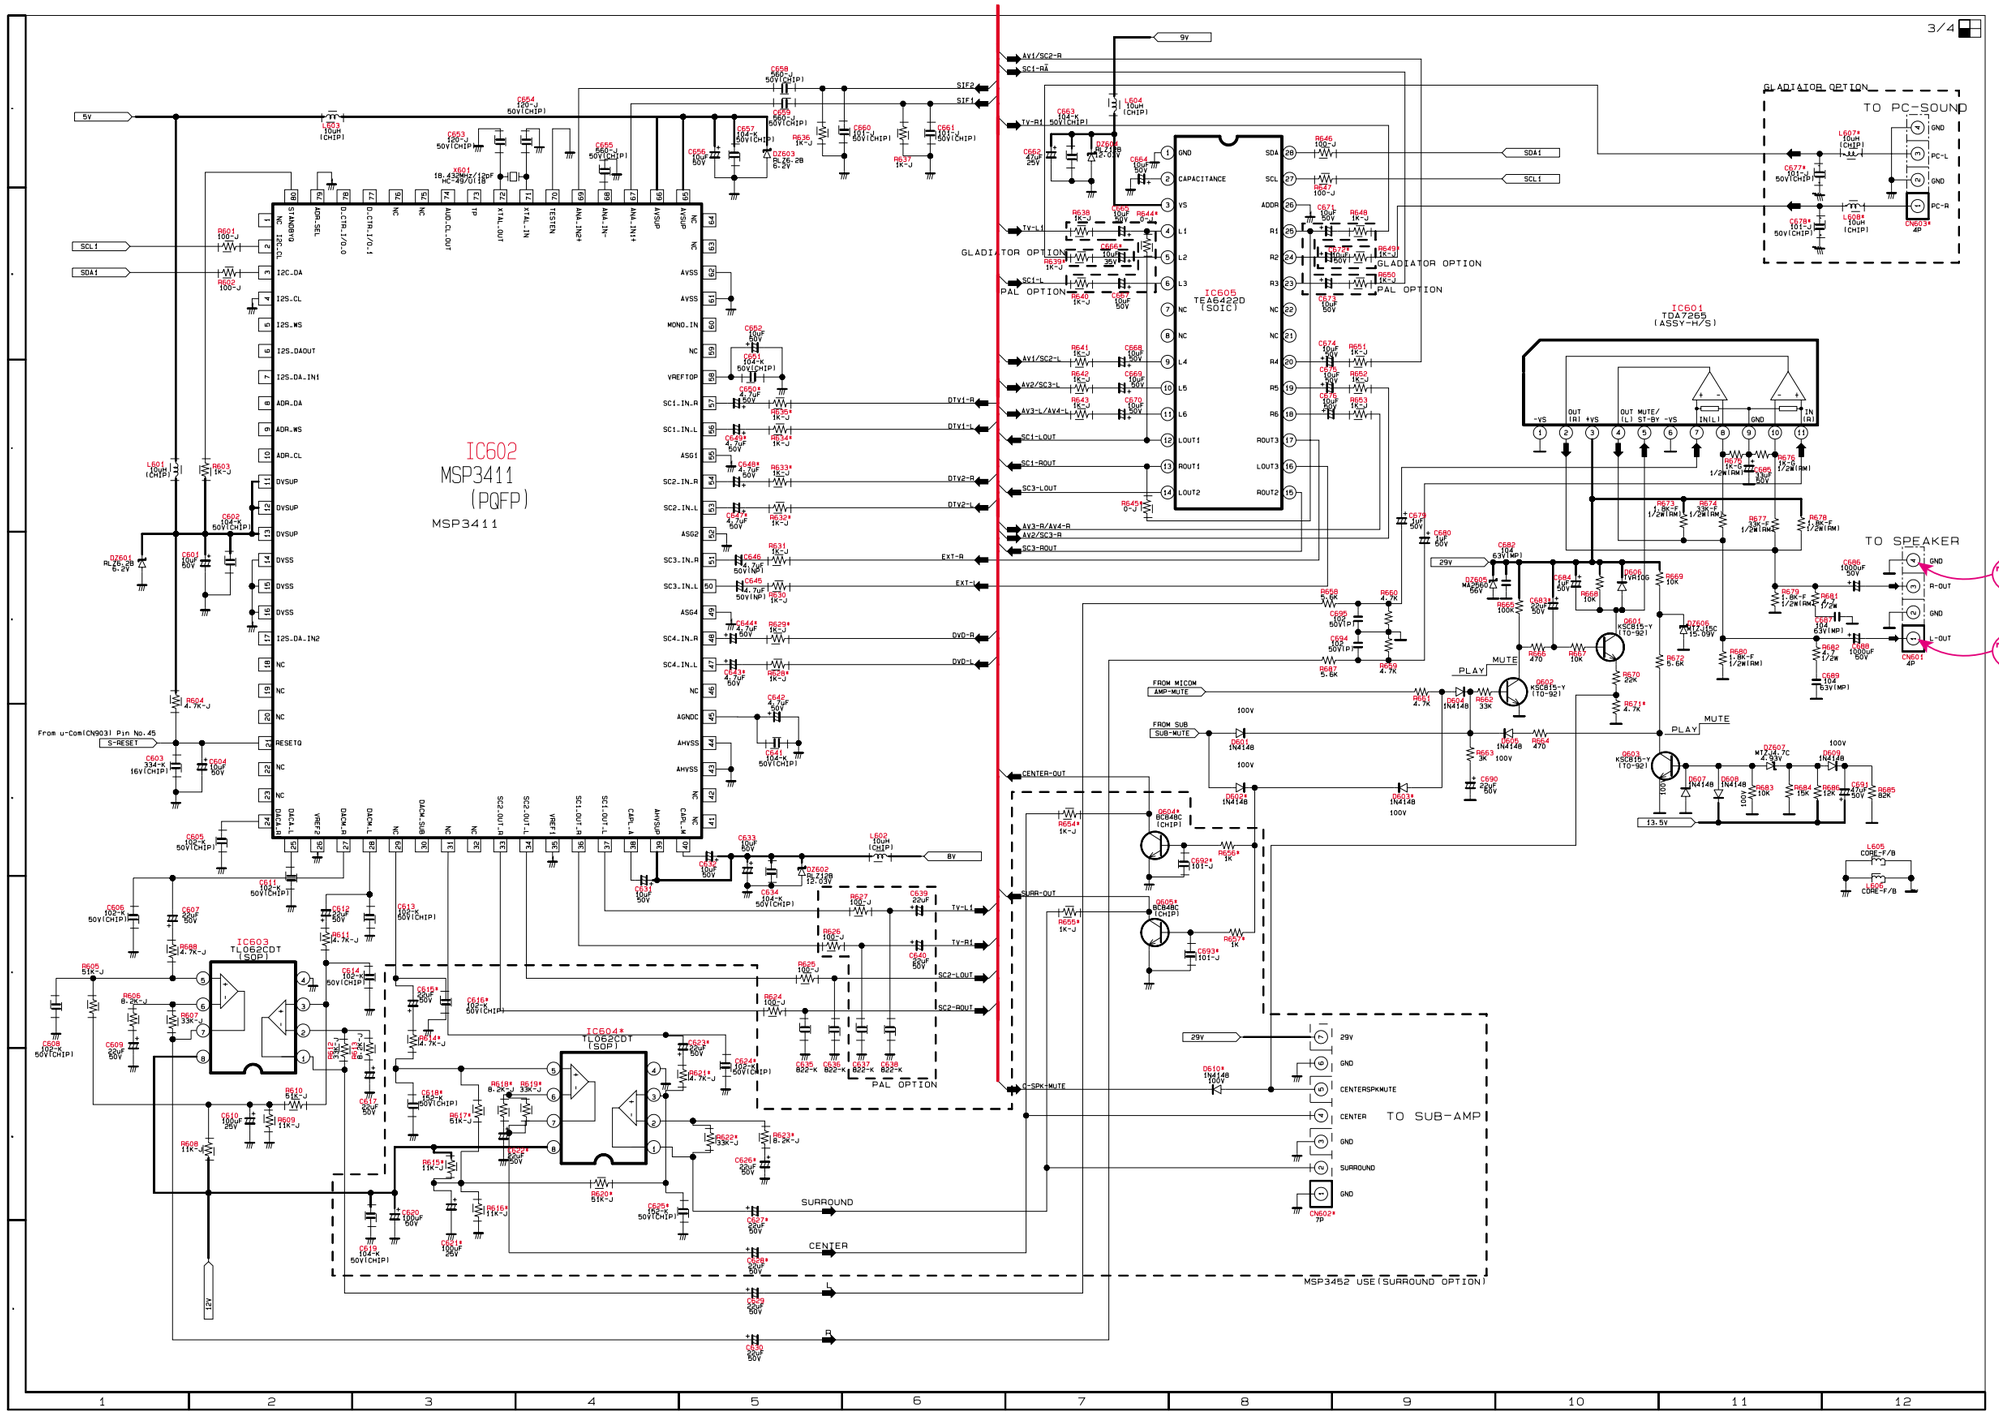
IC602
MSP3411
(PQFP)
MSP3411
IC603
TL062CDT
(SOP)
IC604*
TL062CDT
(SOP)
IC605
TEA6422D
(SOIC)
IC601
TDA7265
(ASSY-H/S)
GLADIATOR OPTION
PAL OPTION
TO PC-SOUND
TO SPEAKER
TO SUB-AMP
MSP3452 USE(SURROUND OPTION)
PLAY
MUTE
FROM MICOM
AMP-MUTE
FROM SUB
SUB-MUTE
From u-Com(CN903) Pin No.45
S-RESET
SURROUND
CENTER
C-SPK-MUTE
CENTER-OUT
SUBA-OUT
TP06
TP07

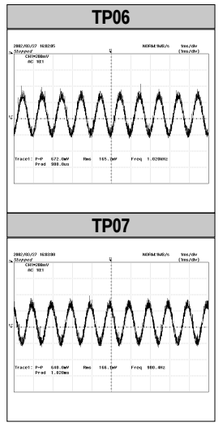
TP06
TP07

5-4 MAIN 4

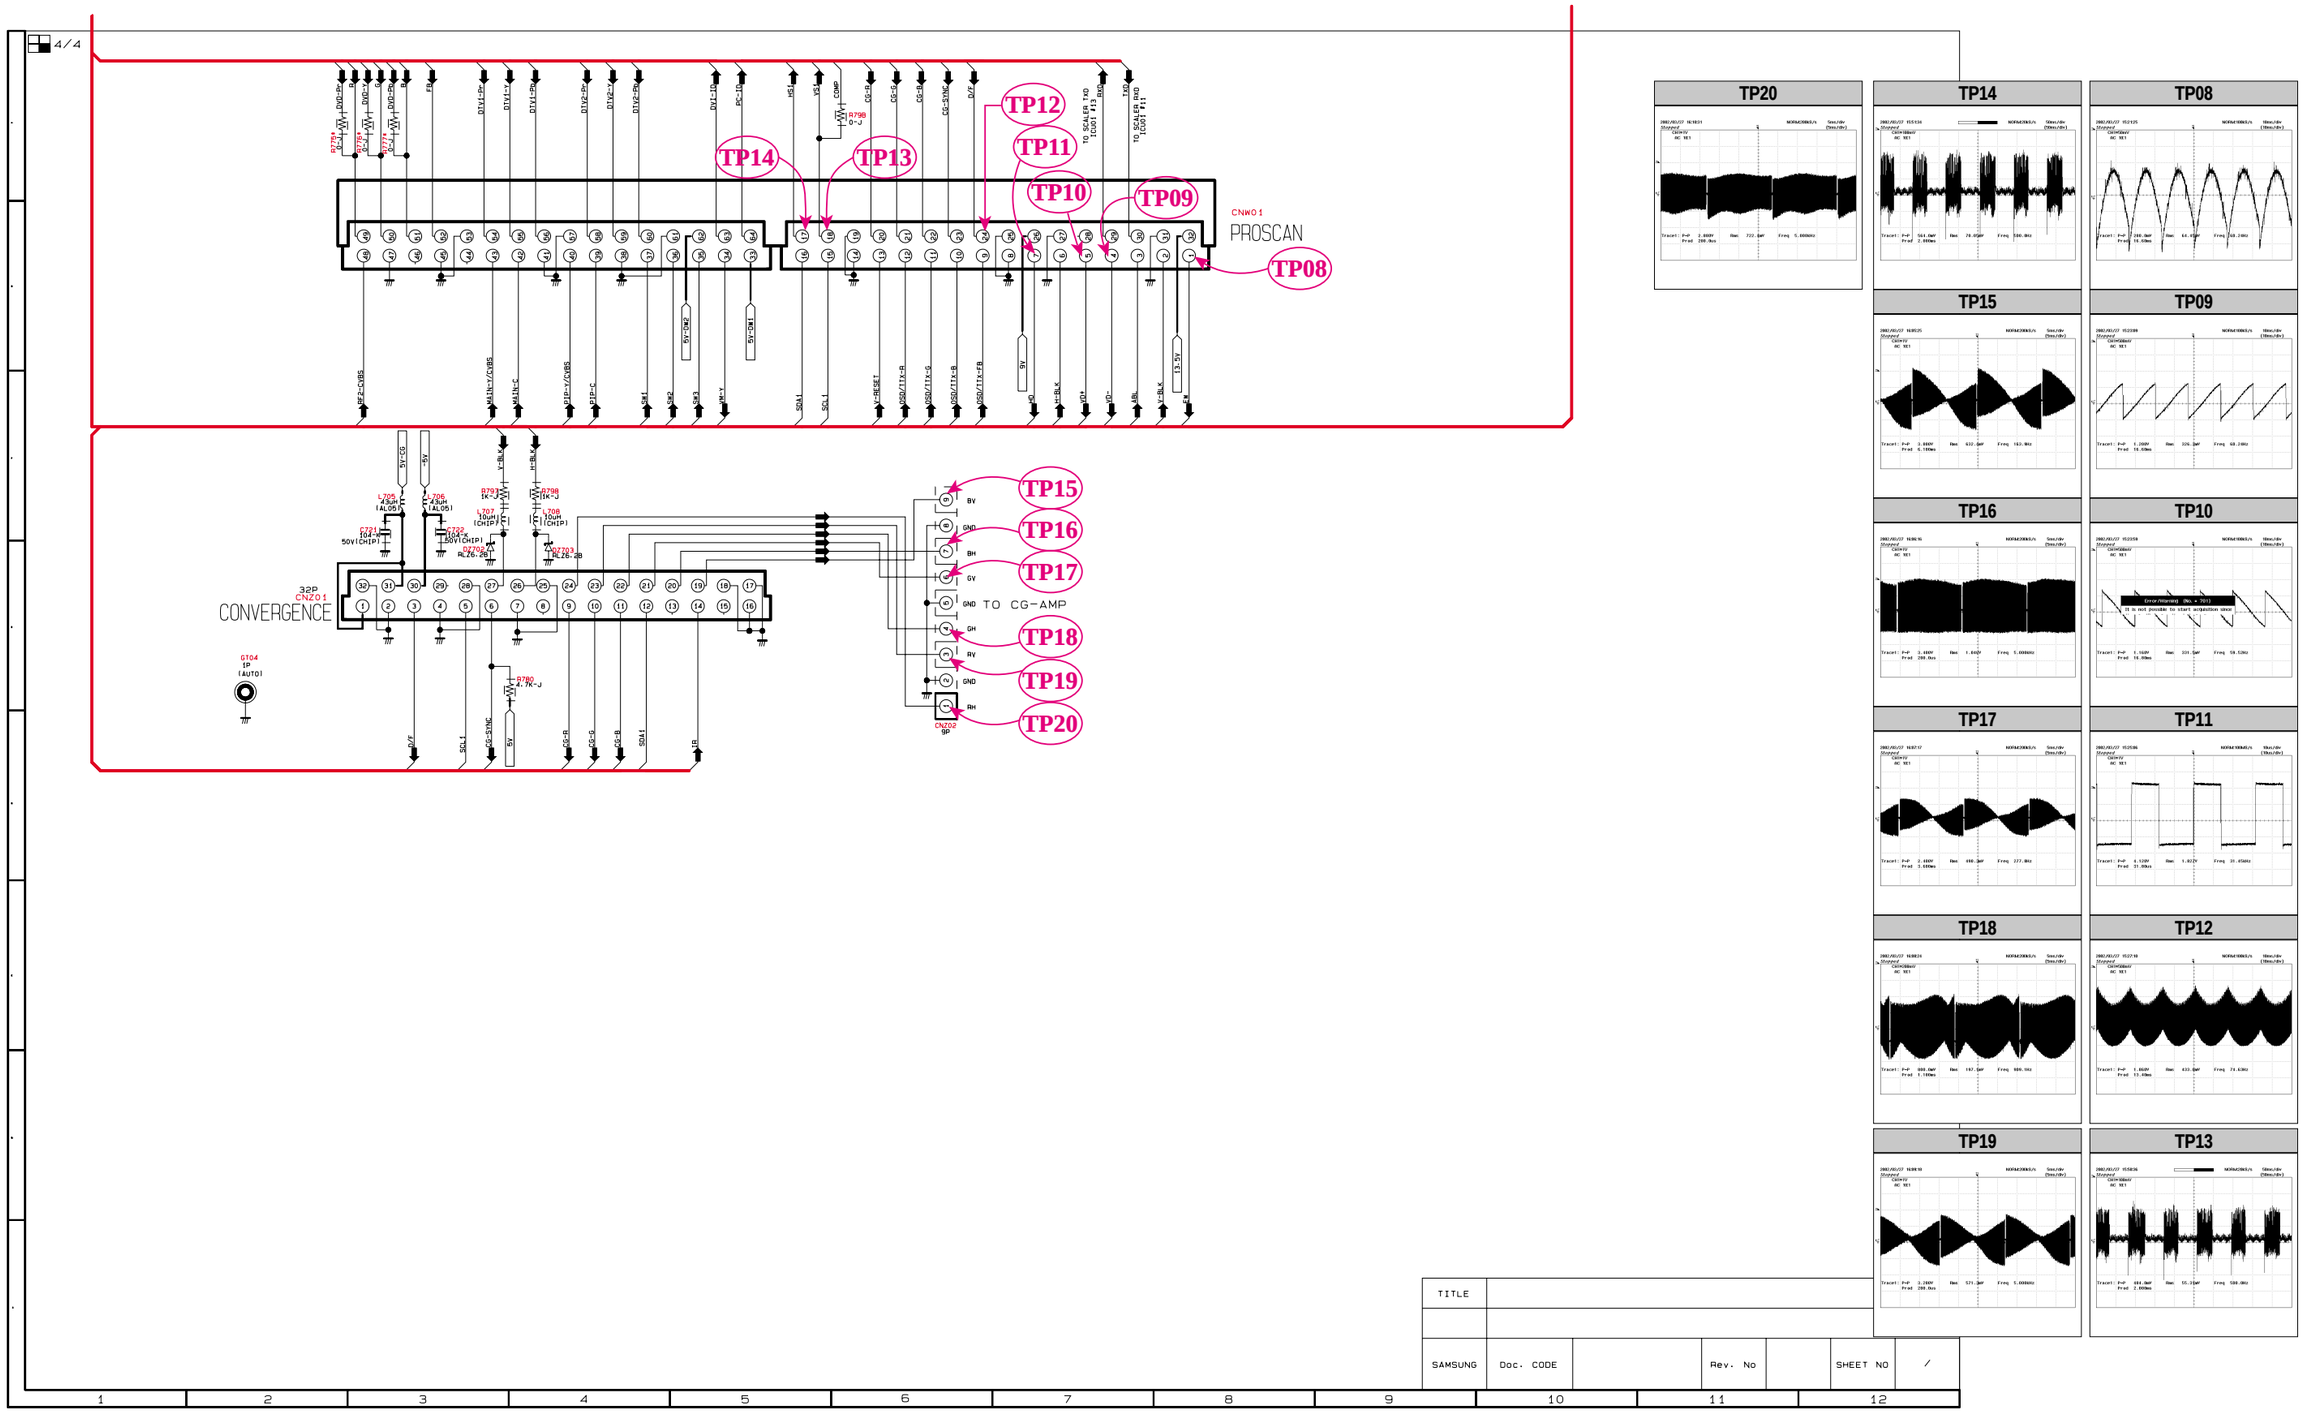

TP20

TP14

TP08

TP15

TP09

TP16

TP10

TP17

TP11

TP18

TP12

TP19

TP13

5-5 T_CM2906_002 MICOM

SCHEMATIC DIAGRAM

CHASSIS NAME : J54A

MODEL NAME : SP-42W5HC

BOARD NAME : M2-MICOM

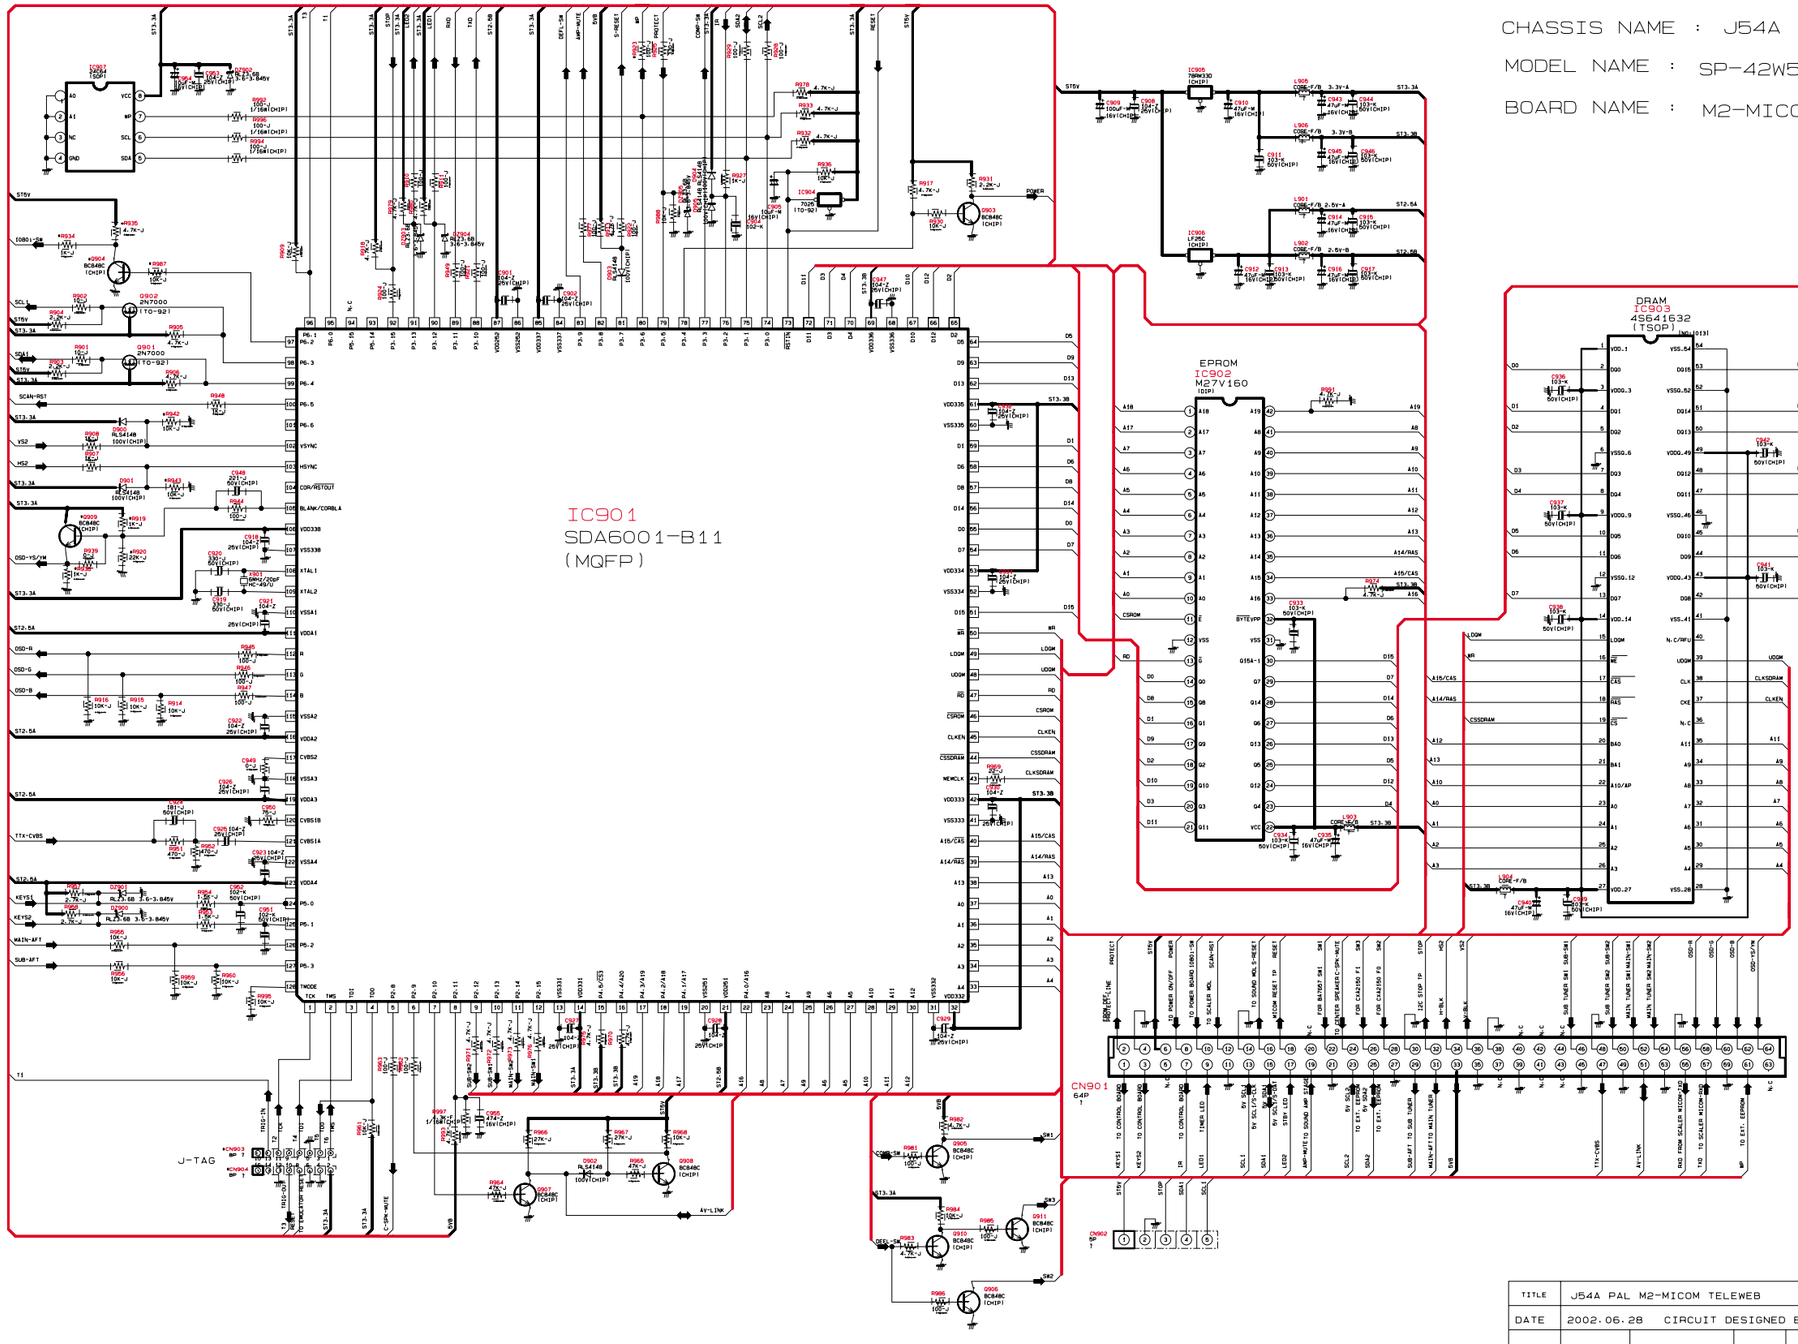

TITLE	J54A PAL M2-MICOM TELEWEB						
DATE	2002.06.28 CIRCUIT DESIGNED BY D.H.JEONG						
SAMSUNG	Doc. CODE	DS020520-0009	Rev. No		SHEET NO	1 / 1	

5-6 T_CMDEAC_XXX MICOM

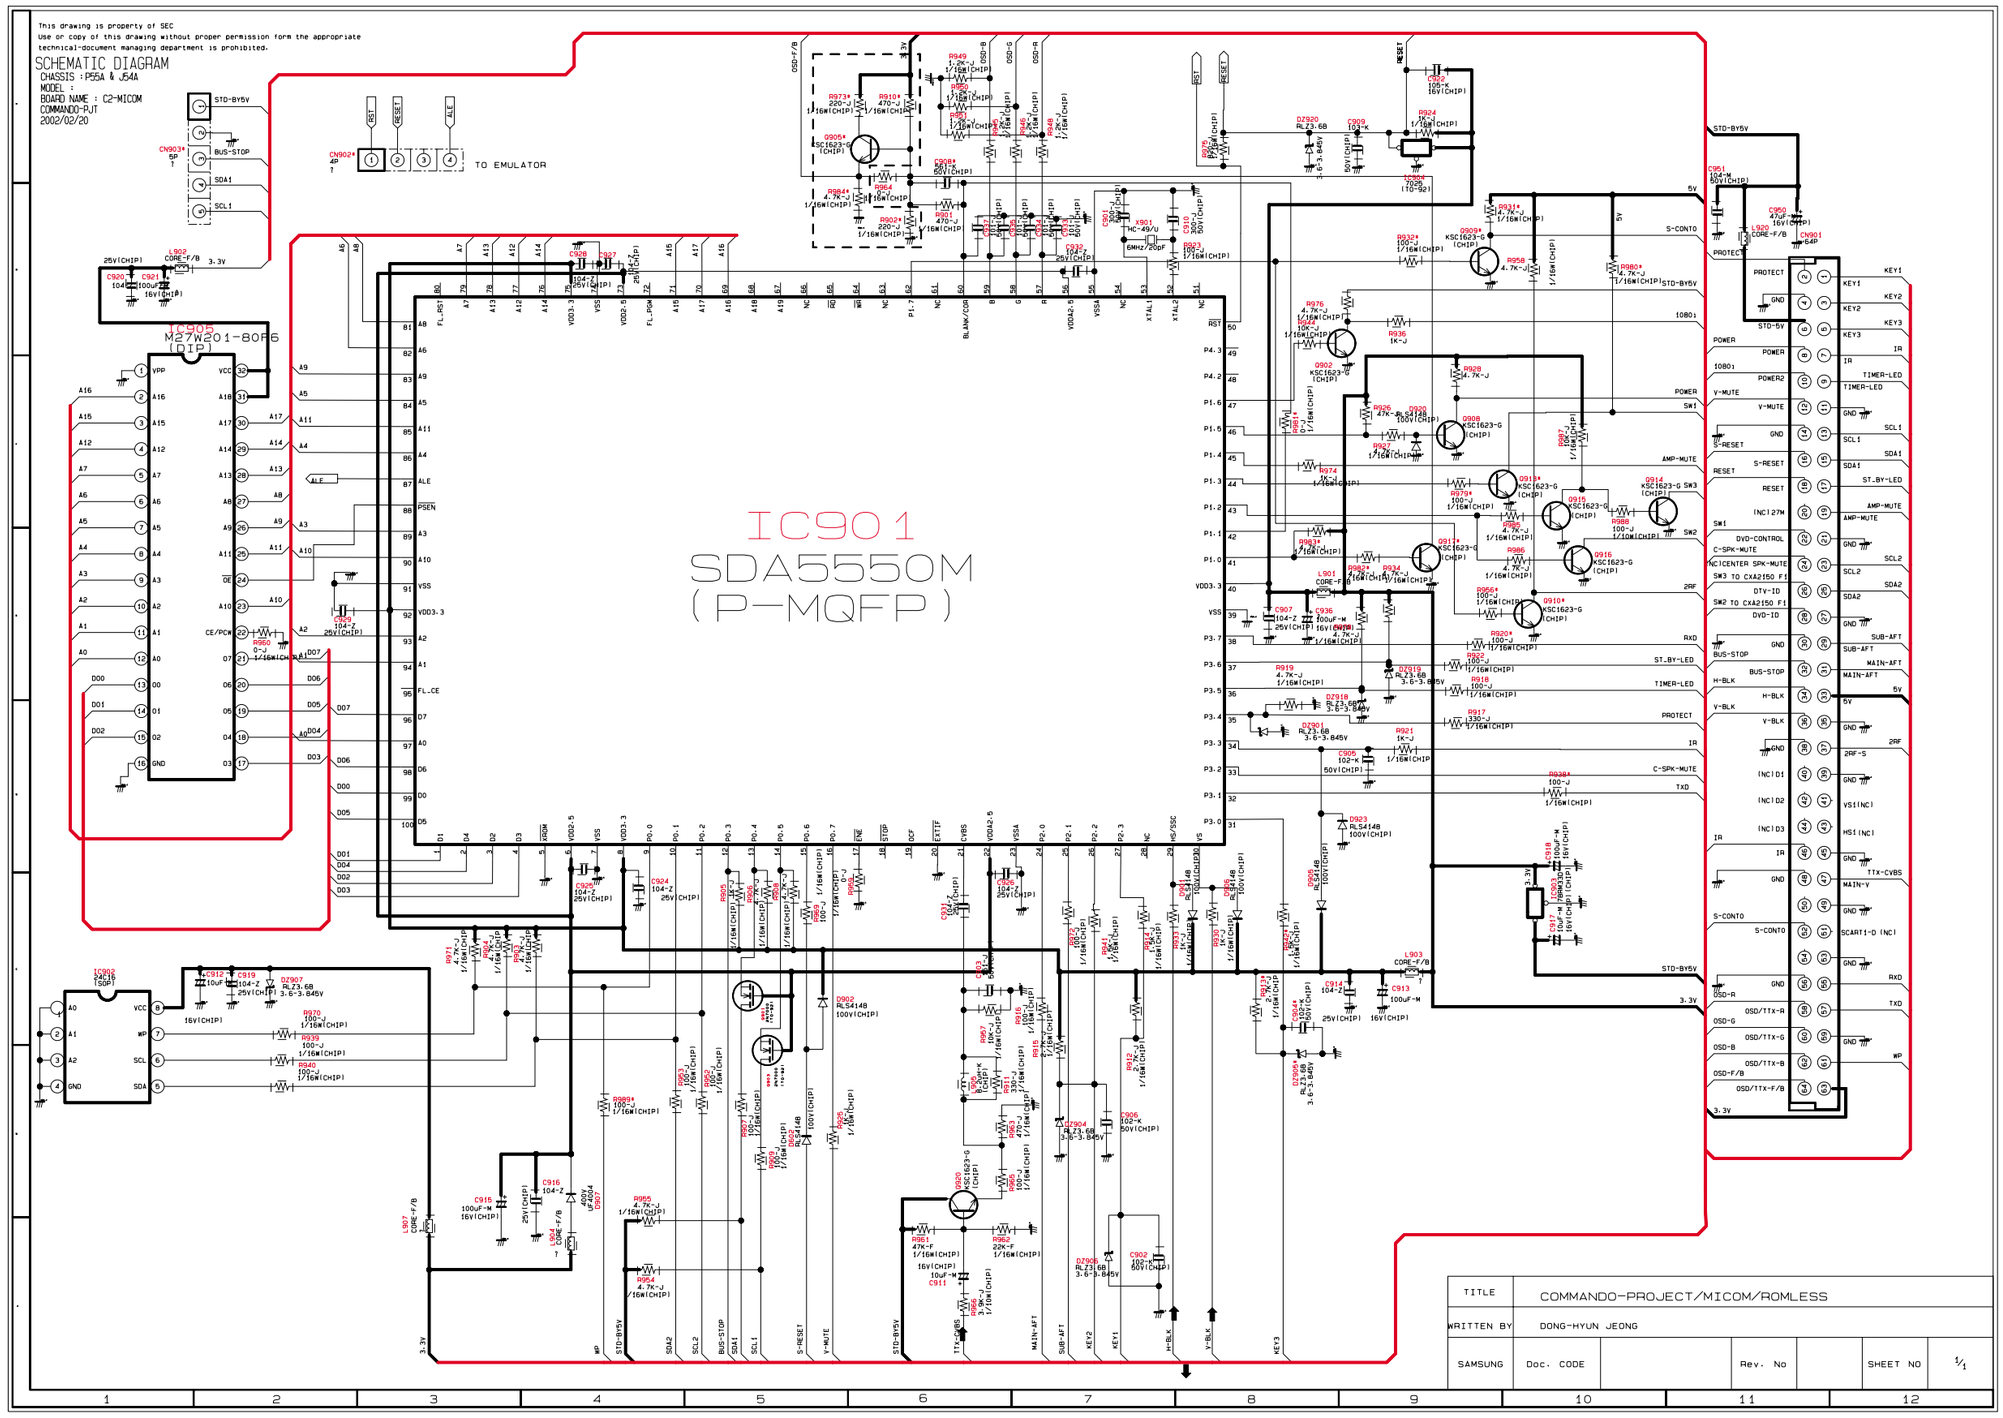

5-7 CRT

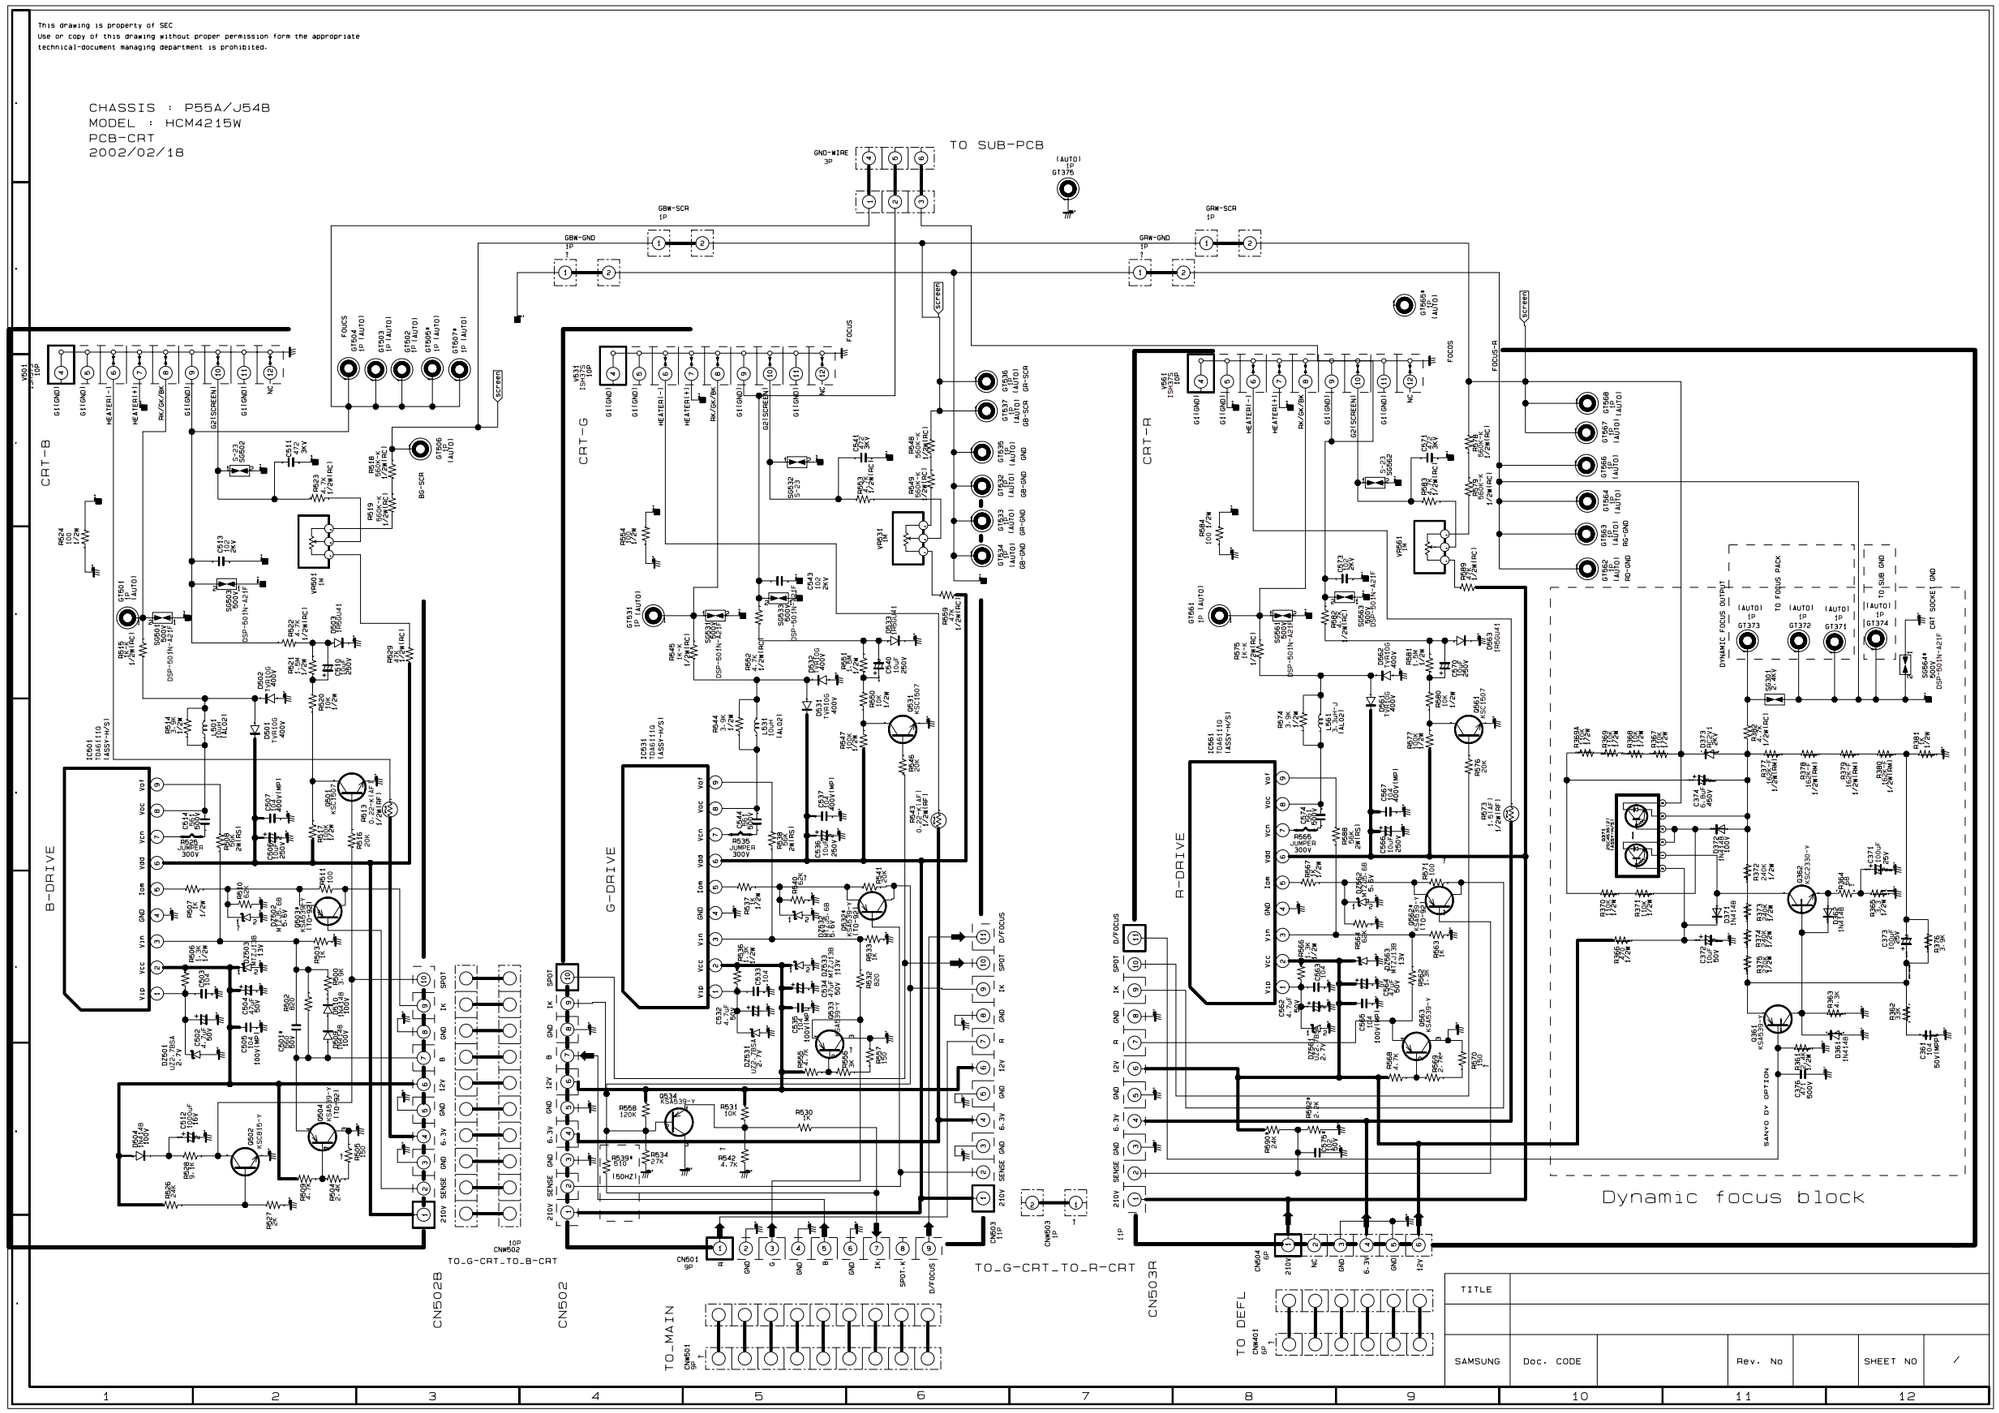
This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.
CHASSIS : P55A/J54B
MODEL : HCM4215W
PCB-CRT
2002/02/18
TO SUB-PCB
GND-WIRE 3P
GBW-SCR 1P
GBW-GND 1P
GRW-SCR 1P
GRW-GND 1P
CRT-B
CRT-G
CRT-R
B-DRIVE
G-DRIVE
R-DRIVE
SCREEN
FOCUS
FOCUS-R
Dynamic focus block
DYNAMIC FOCUS OUTPUT
TO FOCUS PACK
TO SUB GND
CRT SOCKET GND
SANYO DY OPTION
CN502B
CN502
CN503R
TO_MAIN
TO DEFL
TO_G-CRT_TO_B-CRT
TO_G-CRT_TO_R-CRT
TITLE
SAMSUNG
Doc. CODE
Rev. No
SHEET NO

5-8 SUB 1

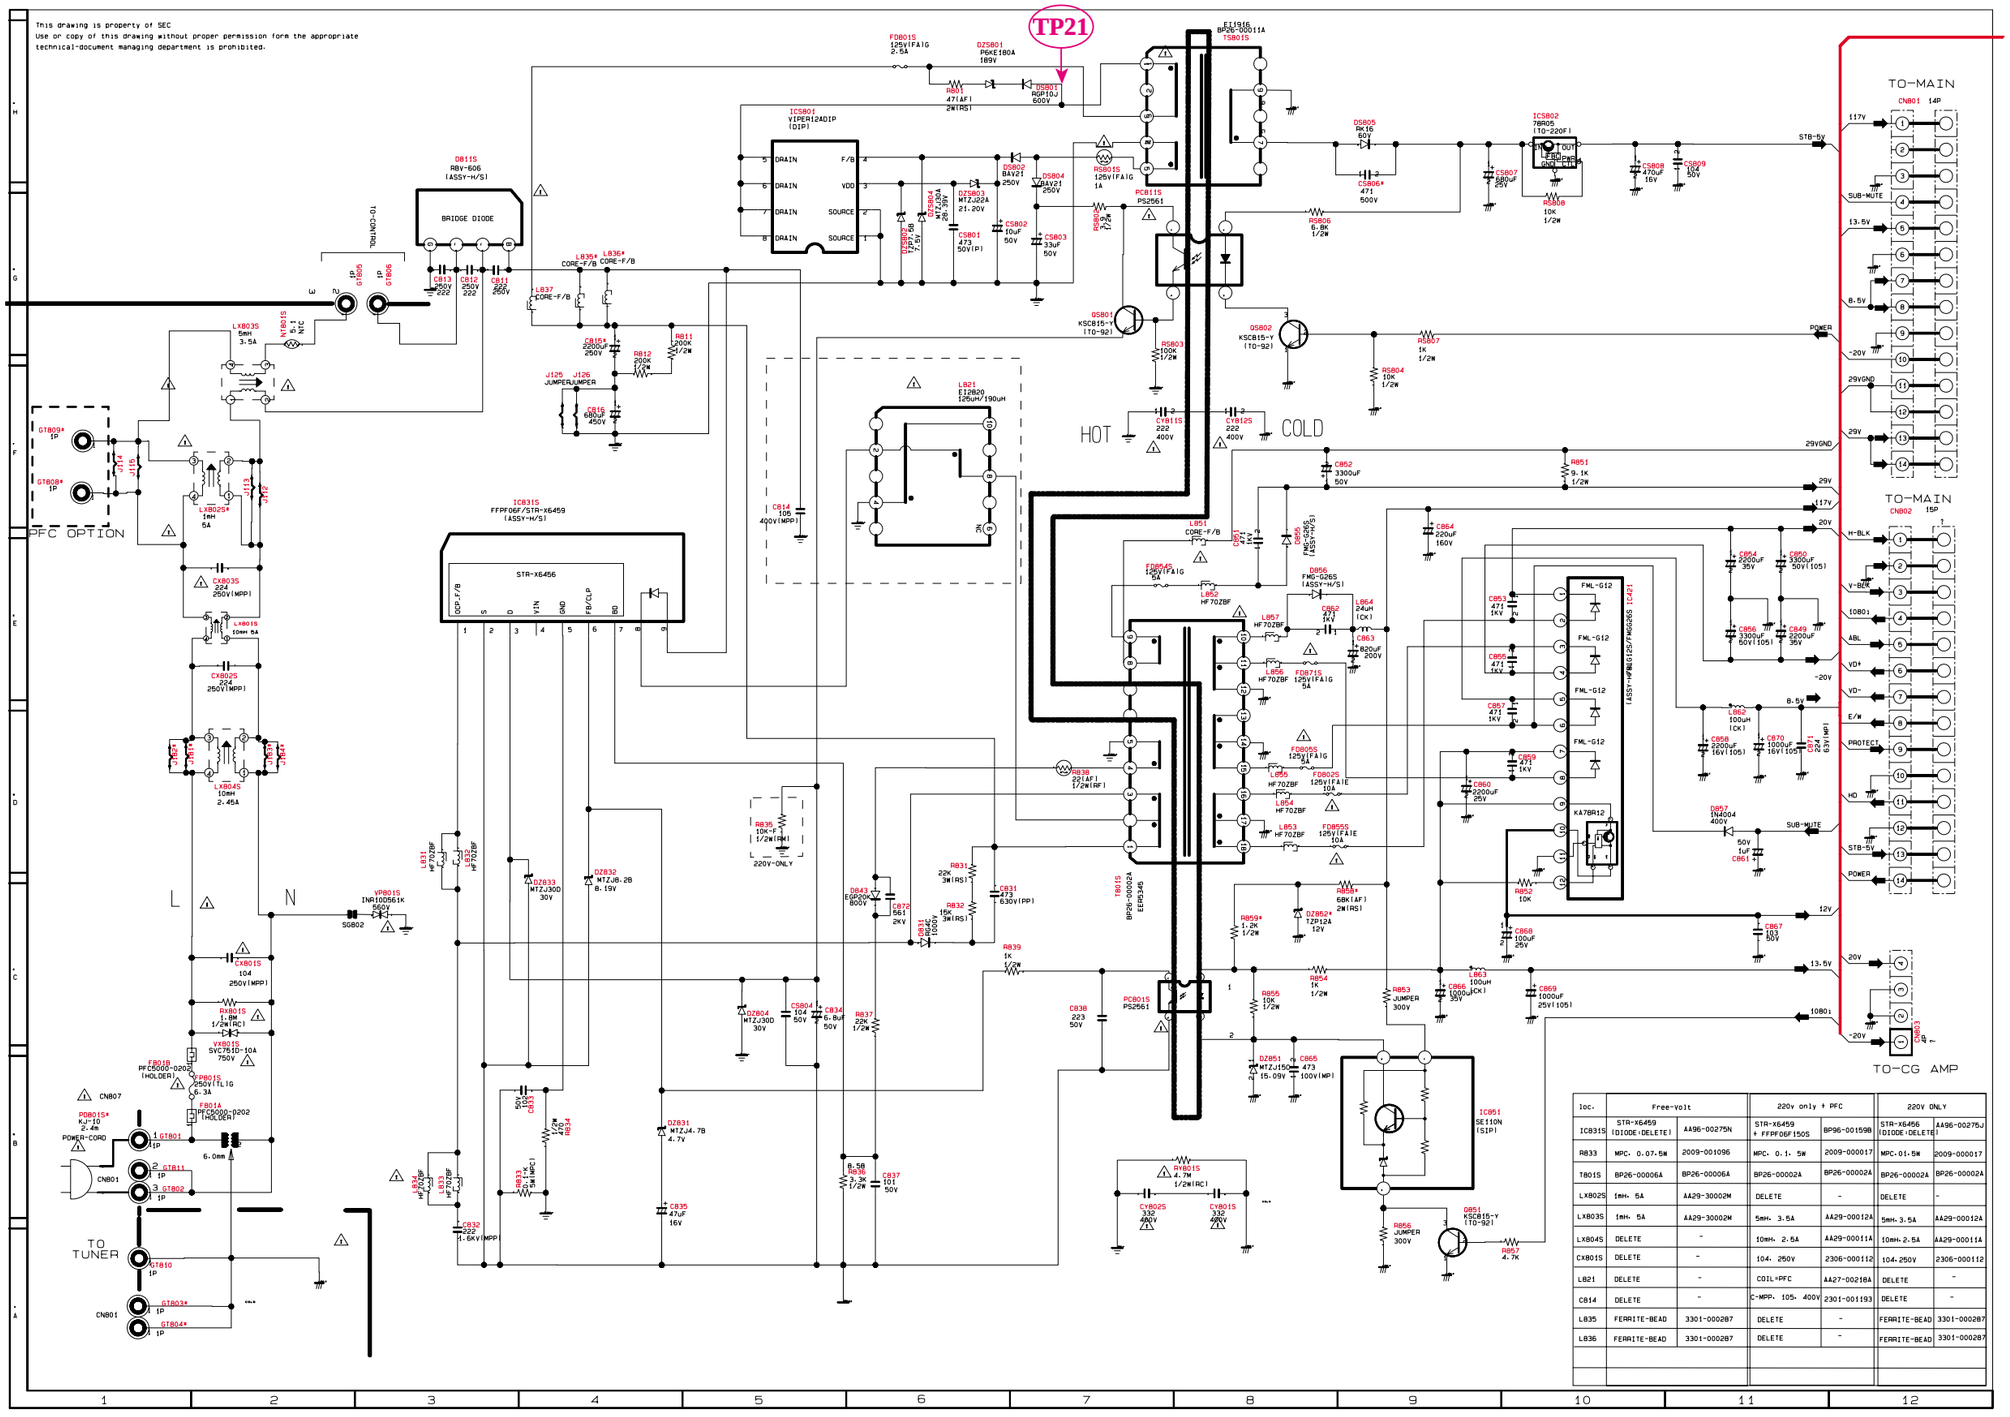



loc.	Free-Volt		220v only + PFC		220V ONLY	
IC831S	STR-X6459 (DIODE-DELETE)	AA96-00275N	STR-X6459 + FFPF06F150S	BP96-00159B	STR-X6456 (DIODE-DELETE)	AA96-00275J
R833	MPC. 0.07-5W	2009-001096	MPC. 0.1- 5W	2009-000017	MPC.01-5W	2009-000017
T801S	BP26-00006A	BP26-00006A	BP26-00002A	BP26-00002A	BP26-00002A	BP26-00002A
LX802S	1mH. 5A	AA29-30002M	DELETE	-	DELETE	-
LX803S	1mH. 5A	AA29-30002M	5mH. 3.5A	AA29-00012A	5mH.3.5A	AA29-00012A
LX804S	DELETE	-	10mH. 2.5A	AA29-00011A	10mH.2.5A	AA29-00011A
CX801S	DELETE	-	104. 250V	2306-000112	104.250V	2306-000112
L821	DELETE	-	COIL+PFC	AA27-00218A	DELETE	-
C814	DELETE	-	C-MPP. 105. 400V	2301-001193	DELETE	-
L835	FERRITE-BEAD	3301-000287	DELETE	-	FERRITE-BEAD	3301-000287
L836	FERRITE-BEAD	3301-000287	DELETE	-	FERRITE-BEAD	3301-000287

5-9 SUB 2

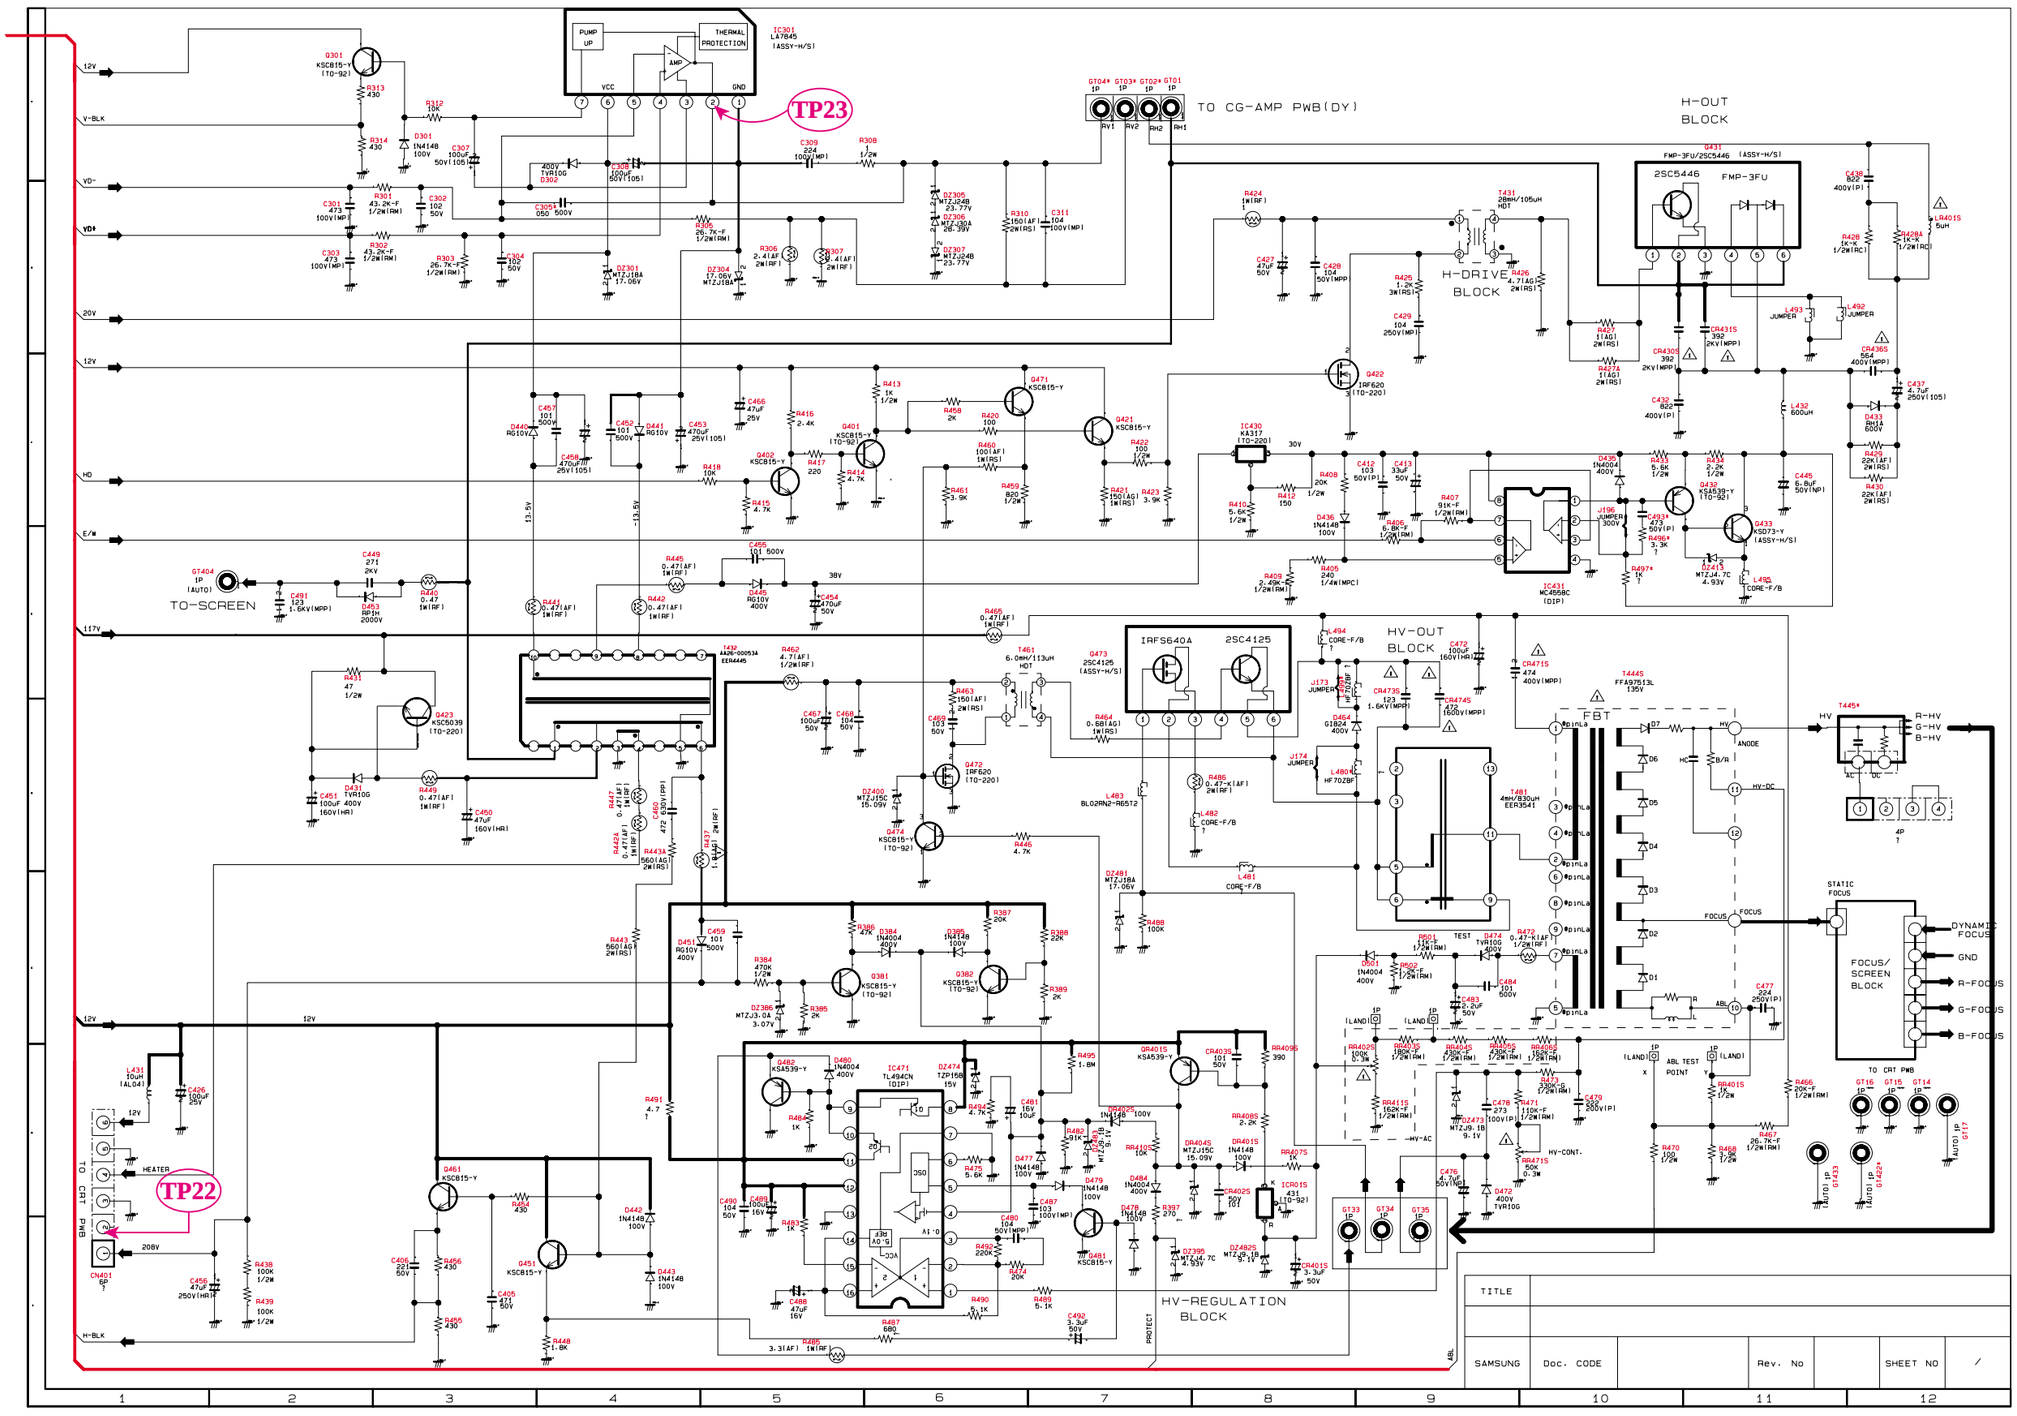

TP22



TP23



5-10 CONVERGENCE (SDC12 - 1)

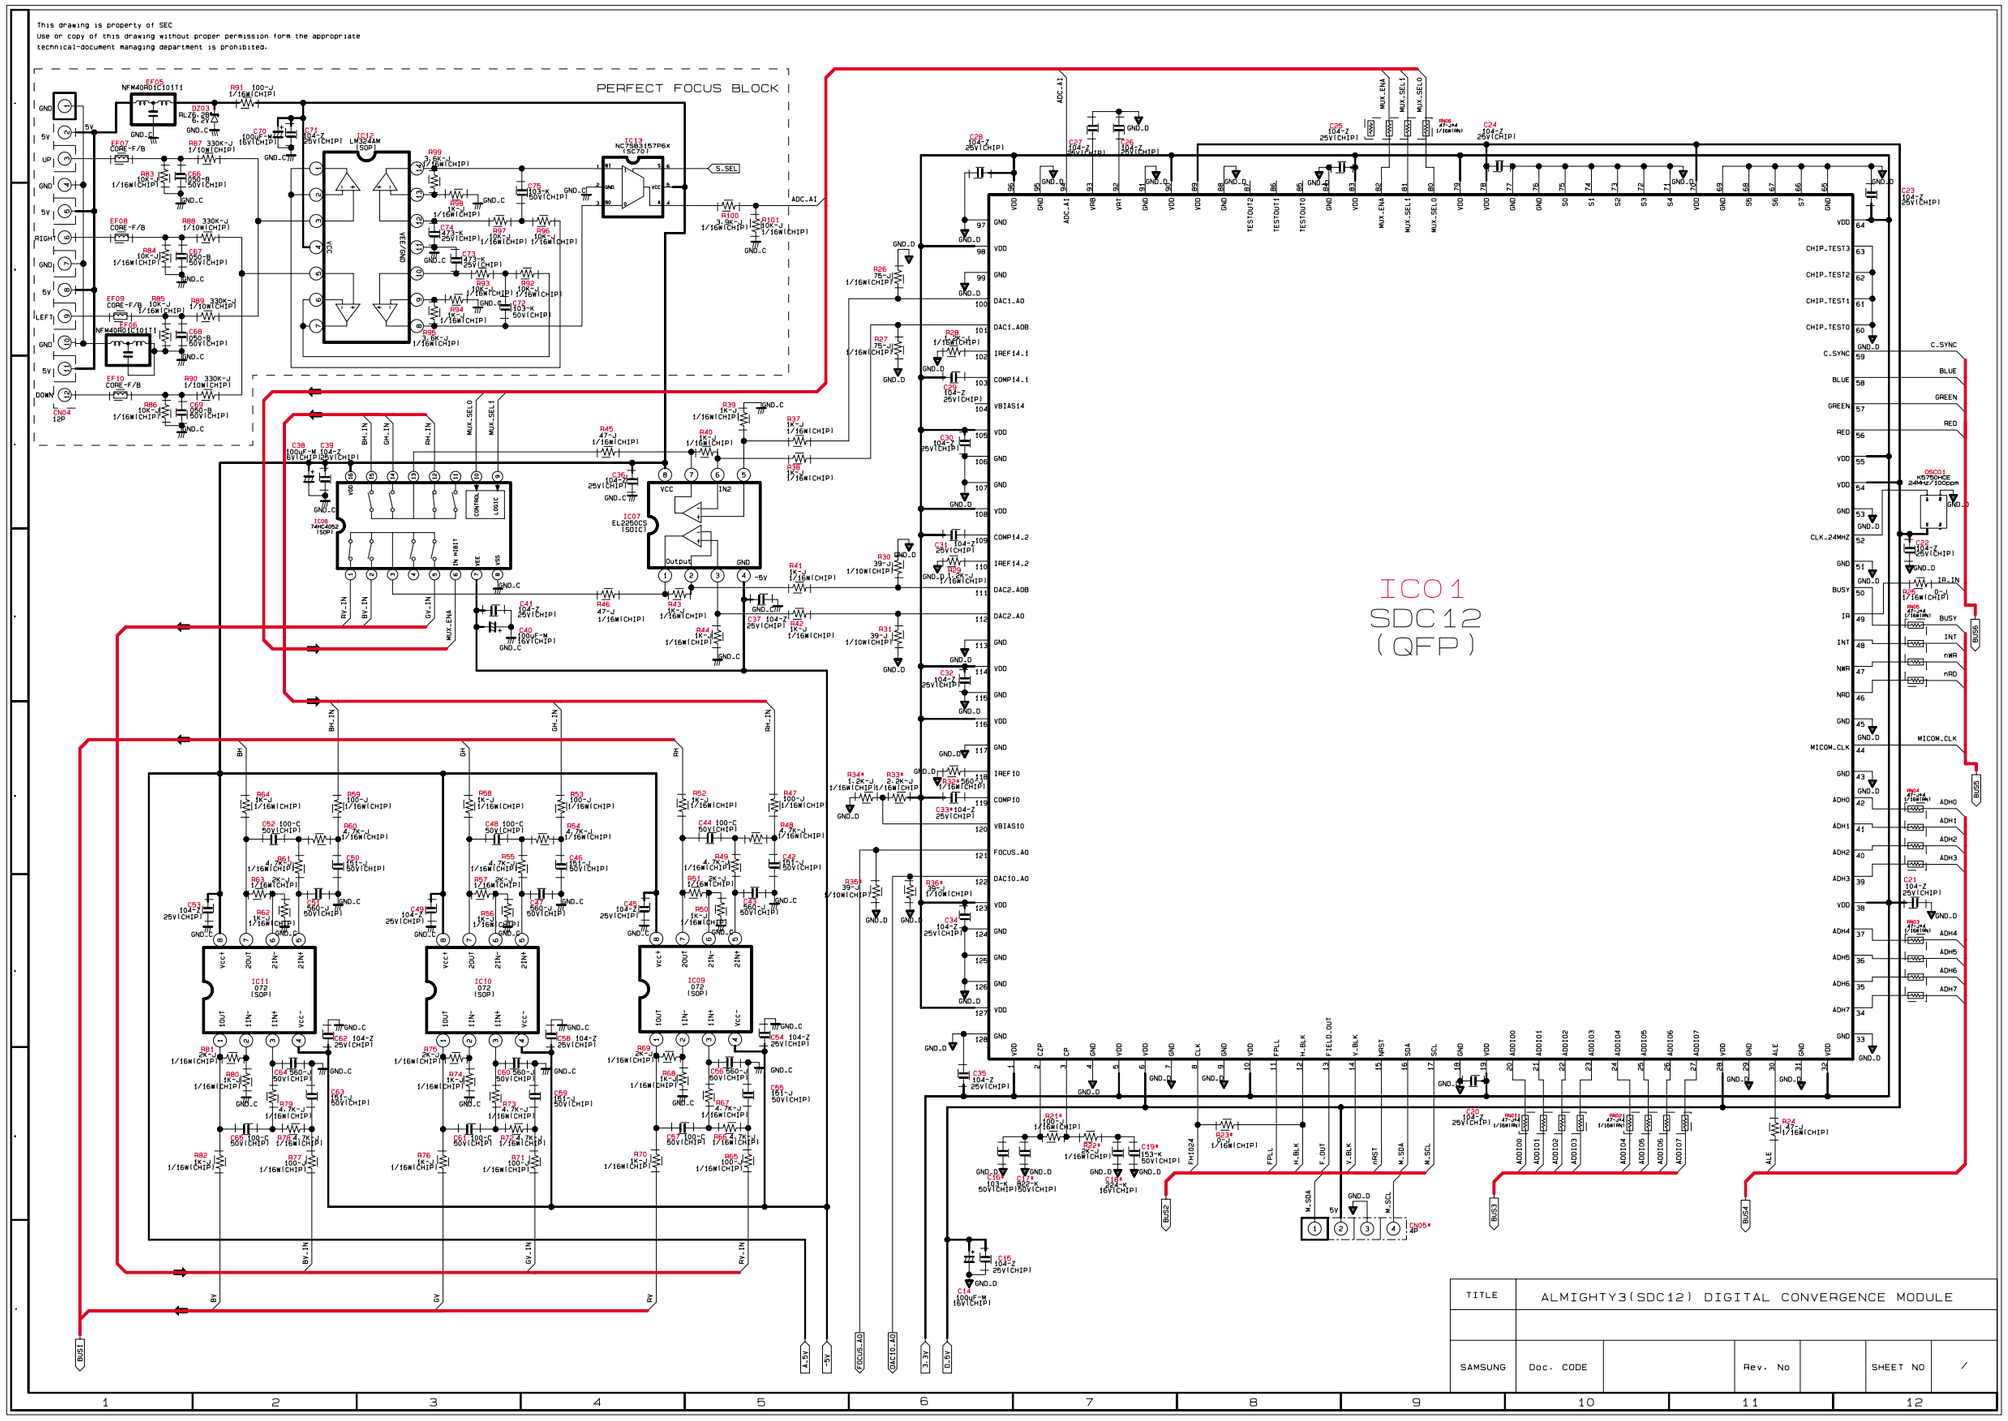

5-11 CONVERGENCE (SDC12 - 2)

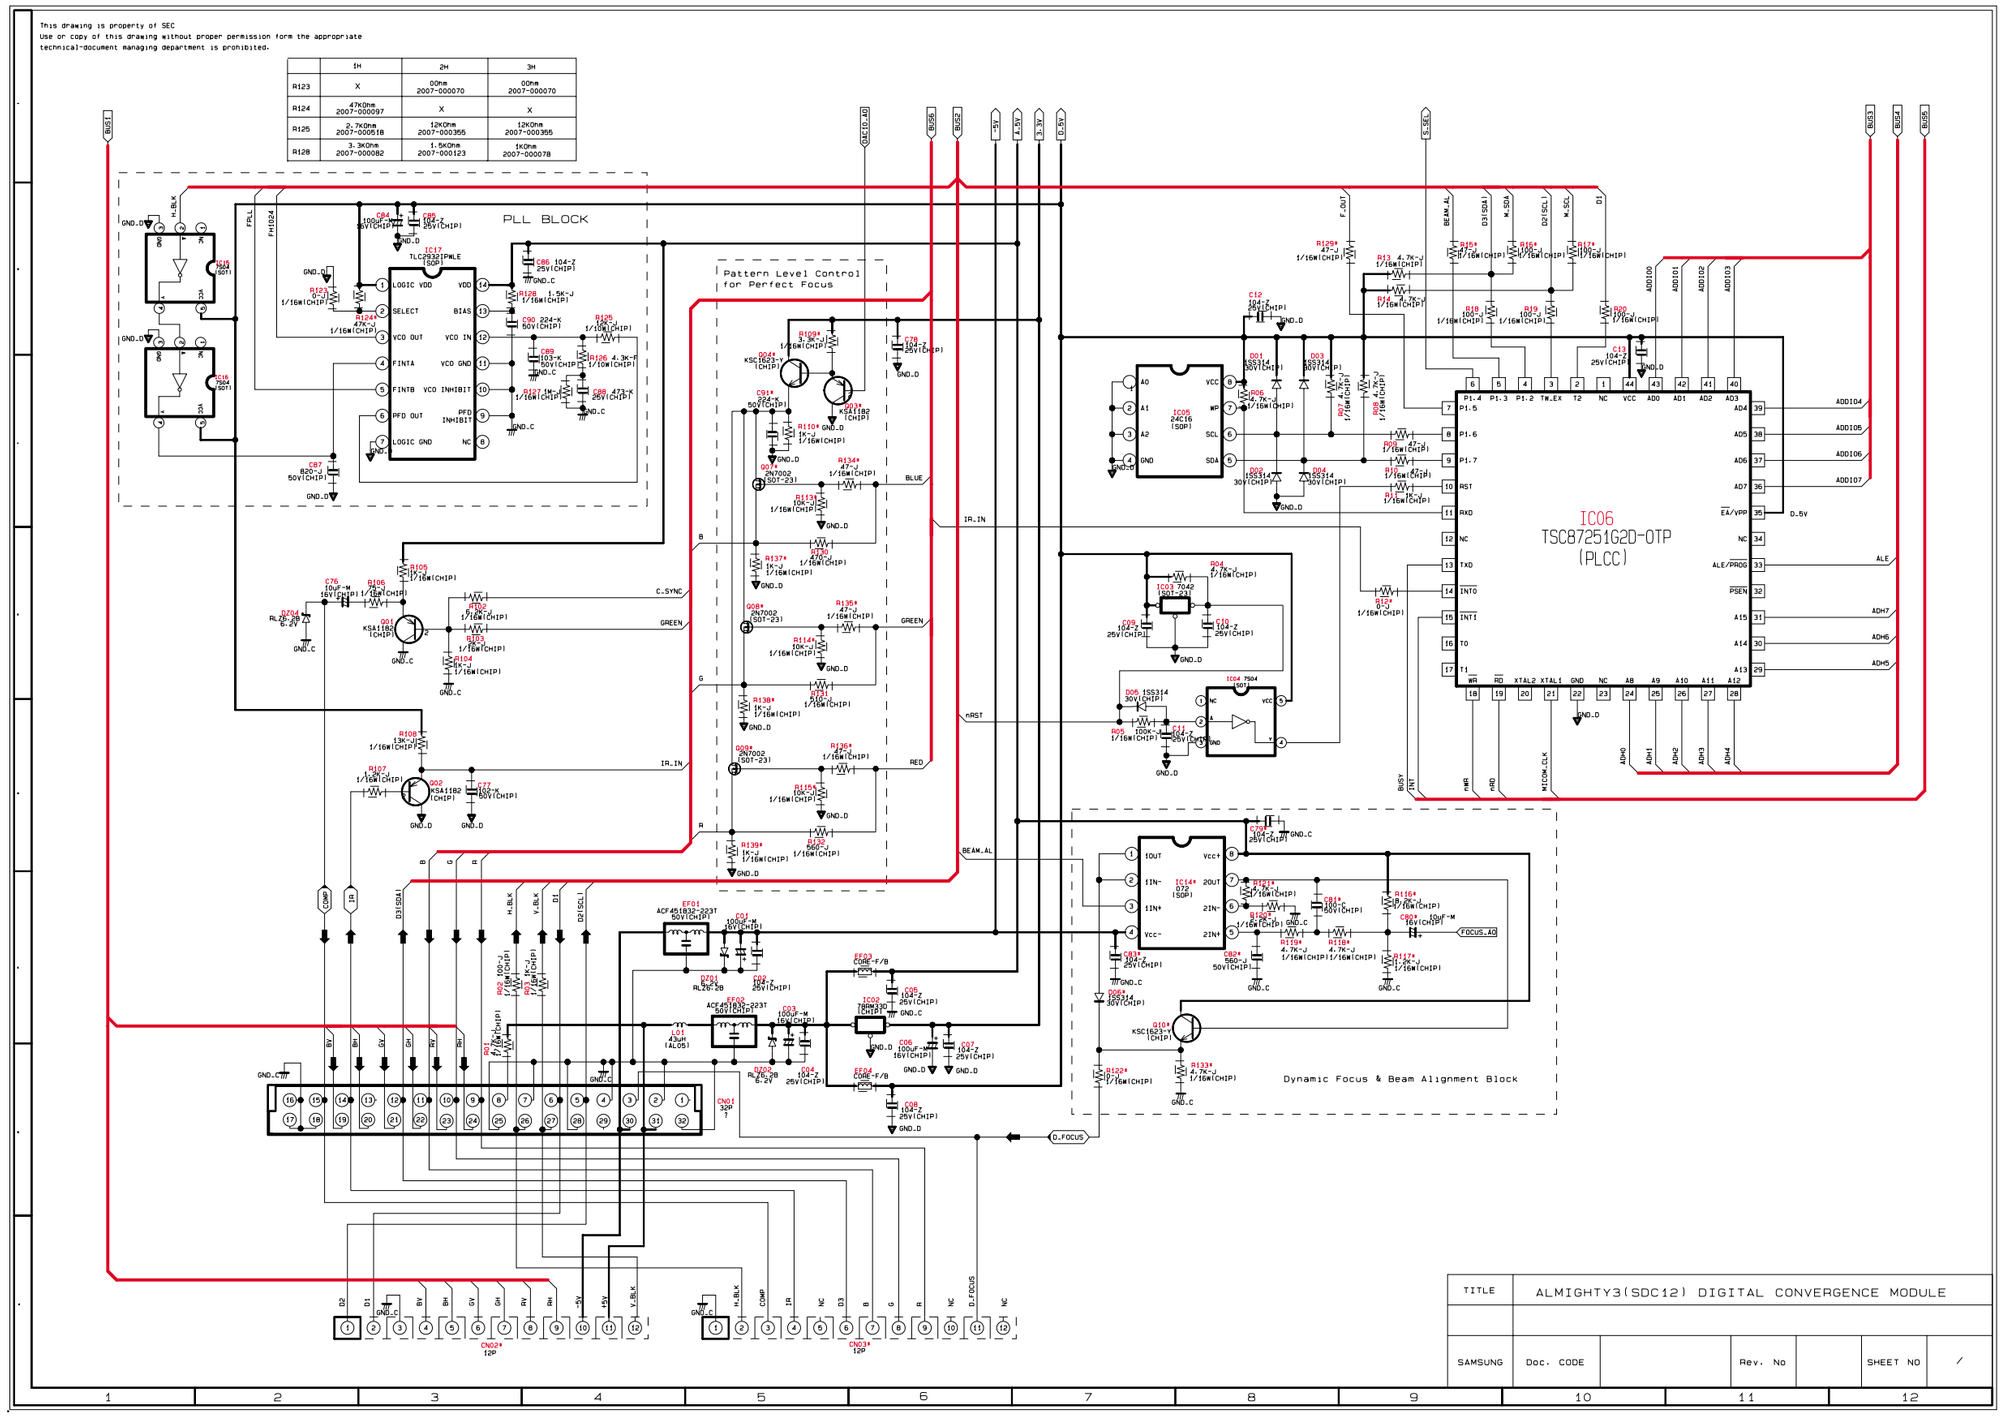

5-12 PRO SCAN 1

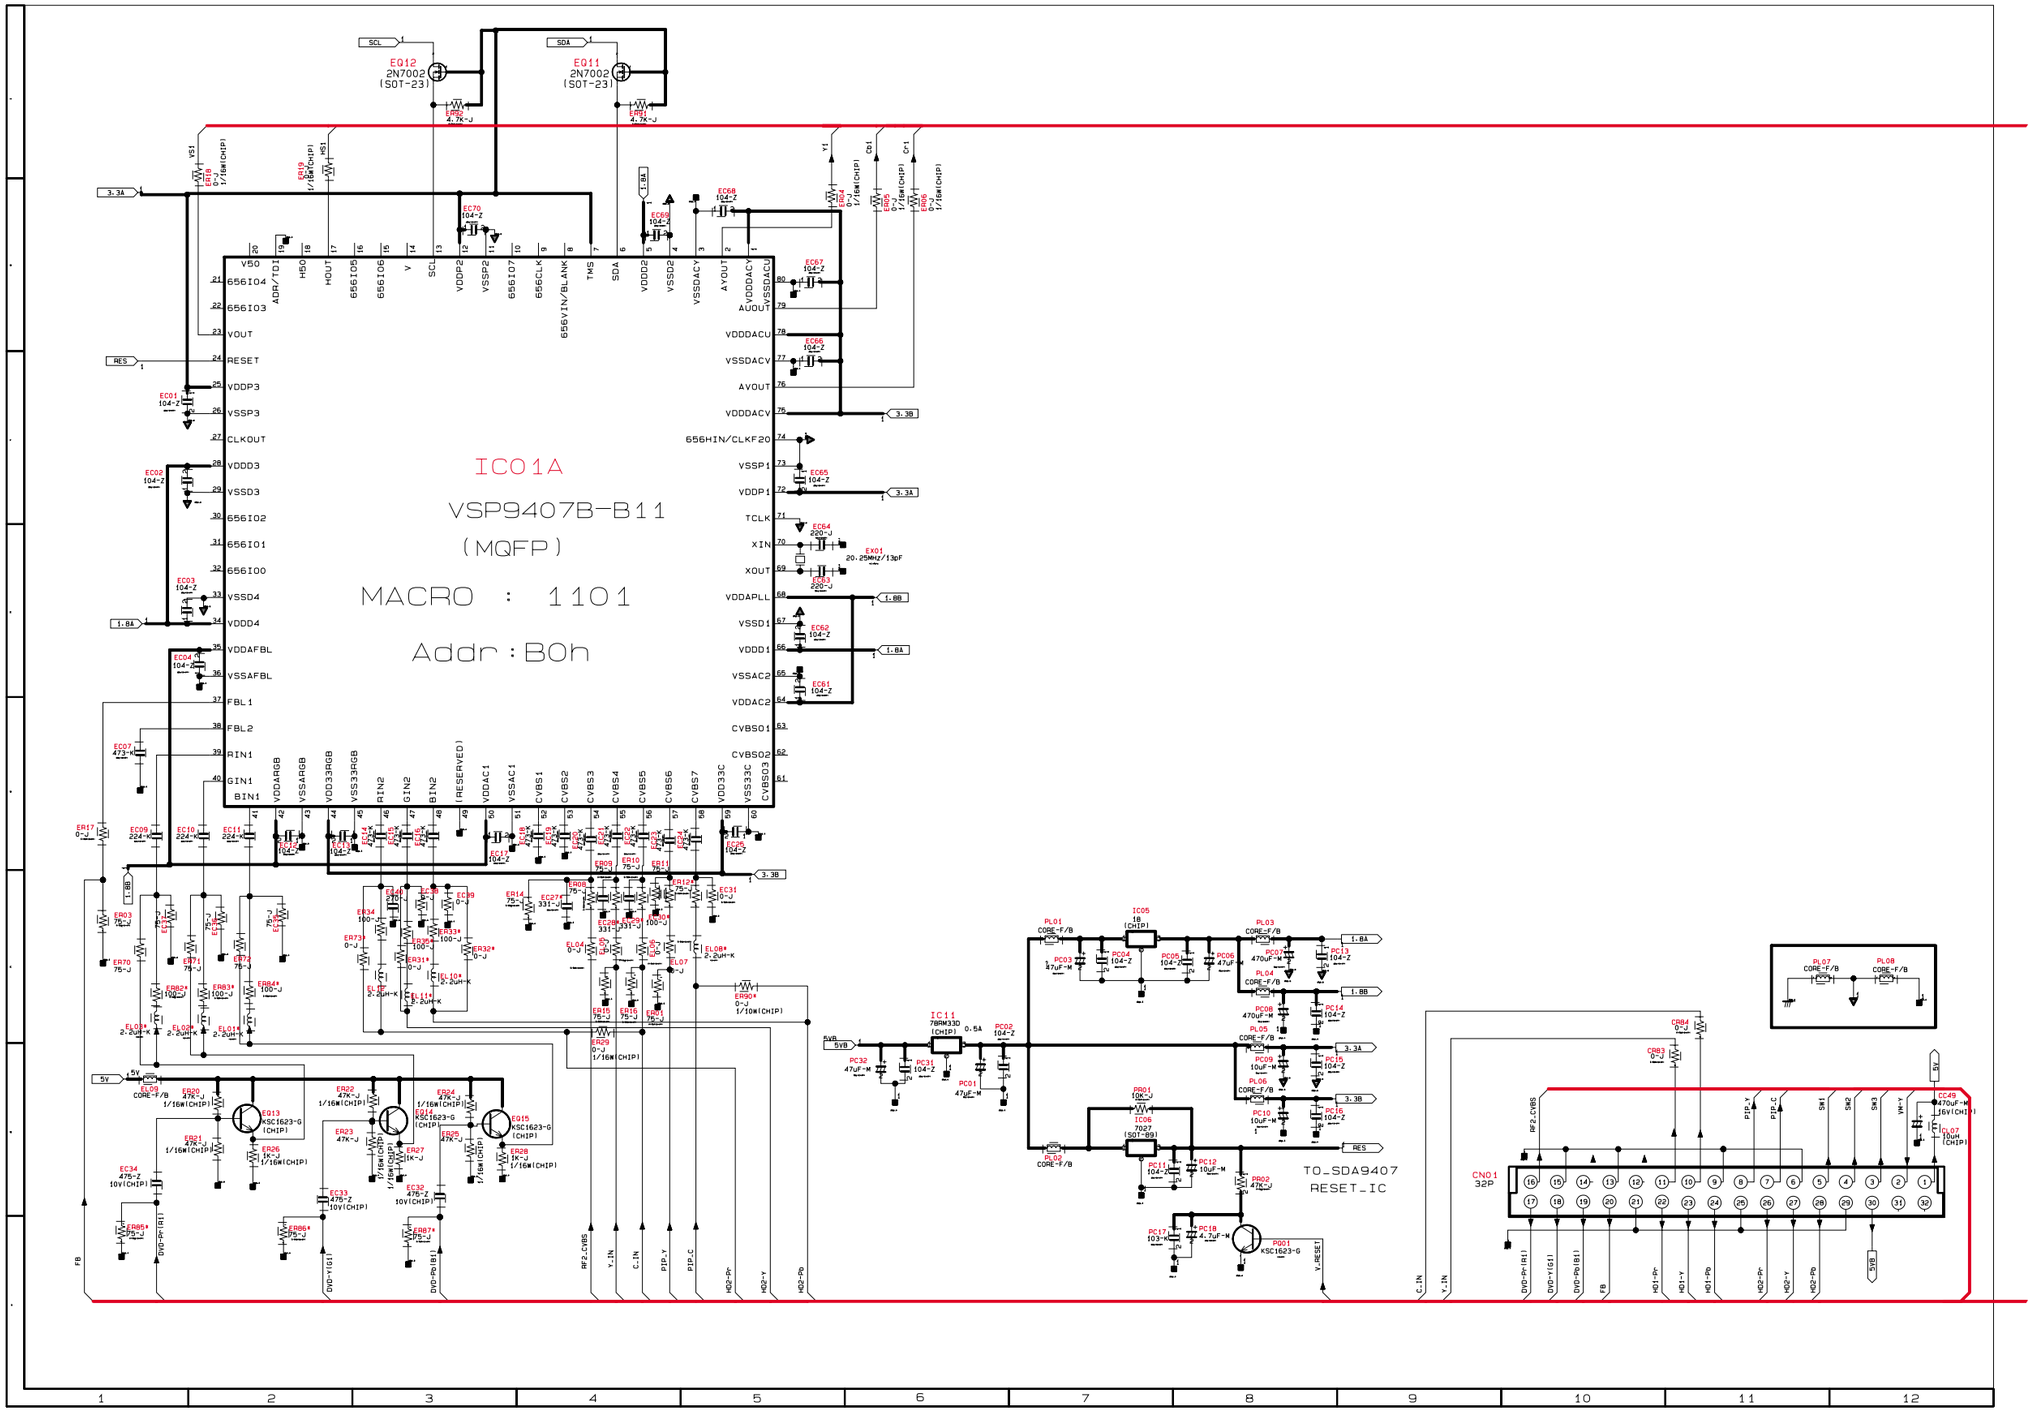

5-13 PRO SCAN 2

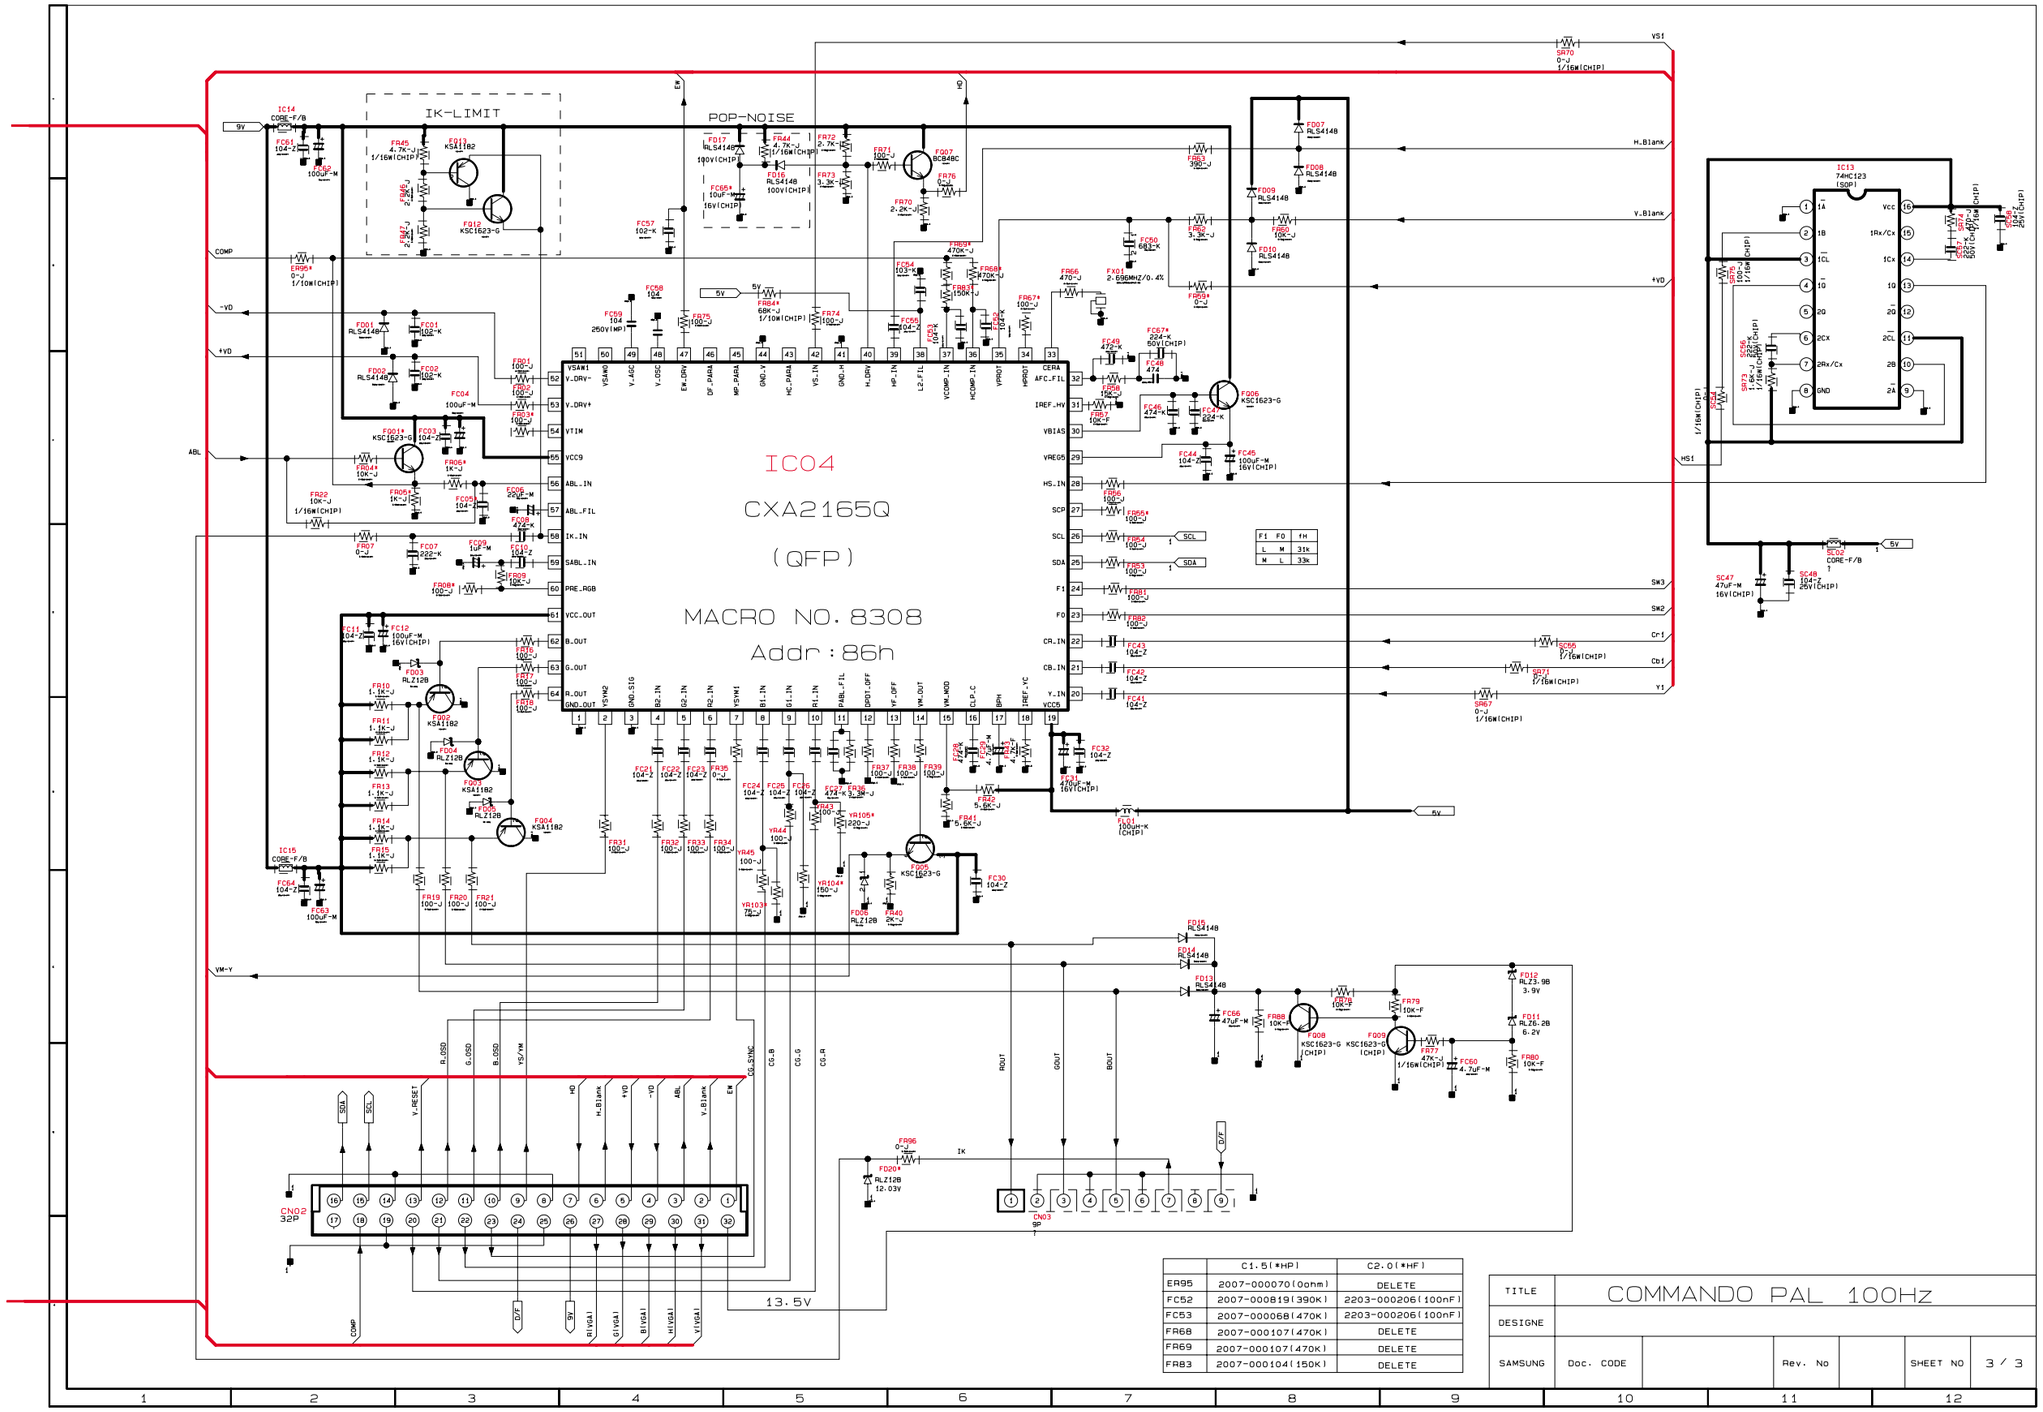

	C1.5(*HP1)	C2.0(*HF)
ER95	2007-000070(0ohm)	DELETE
FC52	2007-000819(390K)	2203-000206(100nF)
FC53	2007-000068(470K)	2203-000206(100nF)
FR68	2007-000107(470K)	DELETE
FR69	2007-000107(470K)	DELETE
FR83	2007-000104(150K)	DELETE

5-14 AV FRONT

This drawing is property of SEC
Use or copy of this drawing without proper permission from the appropriate
technical-document managing department is prohibited.

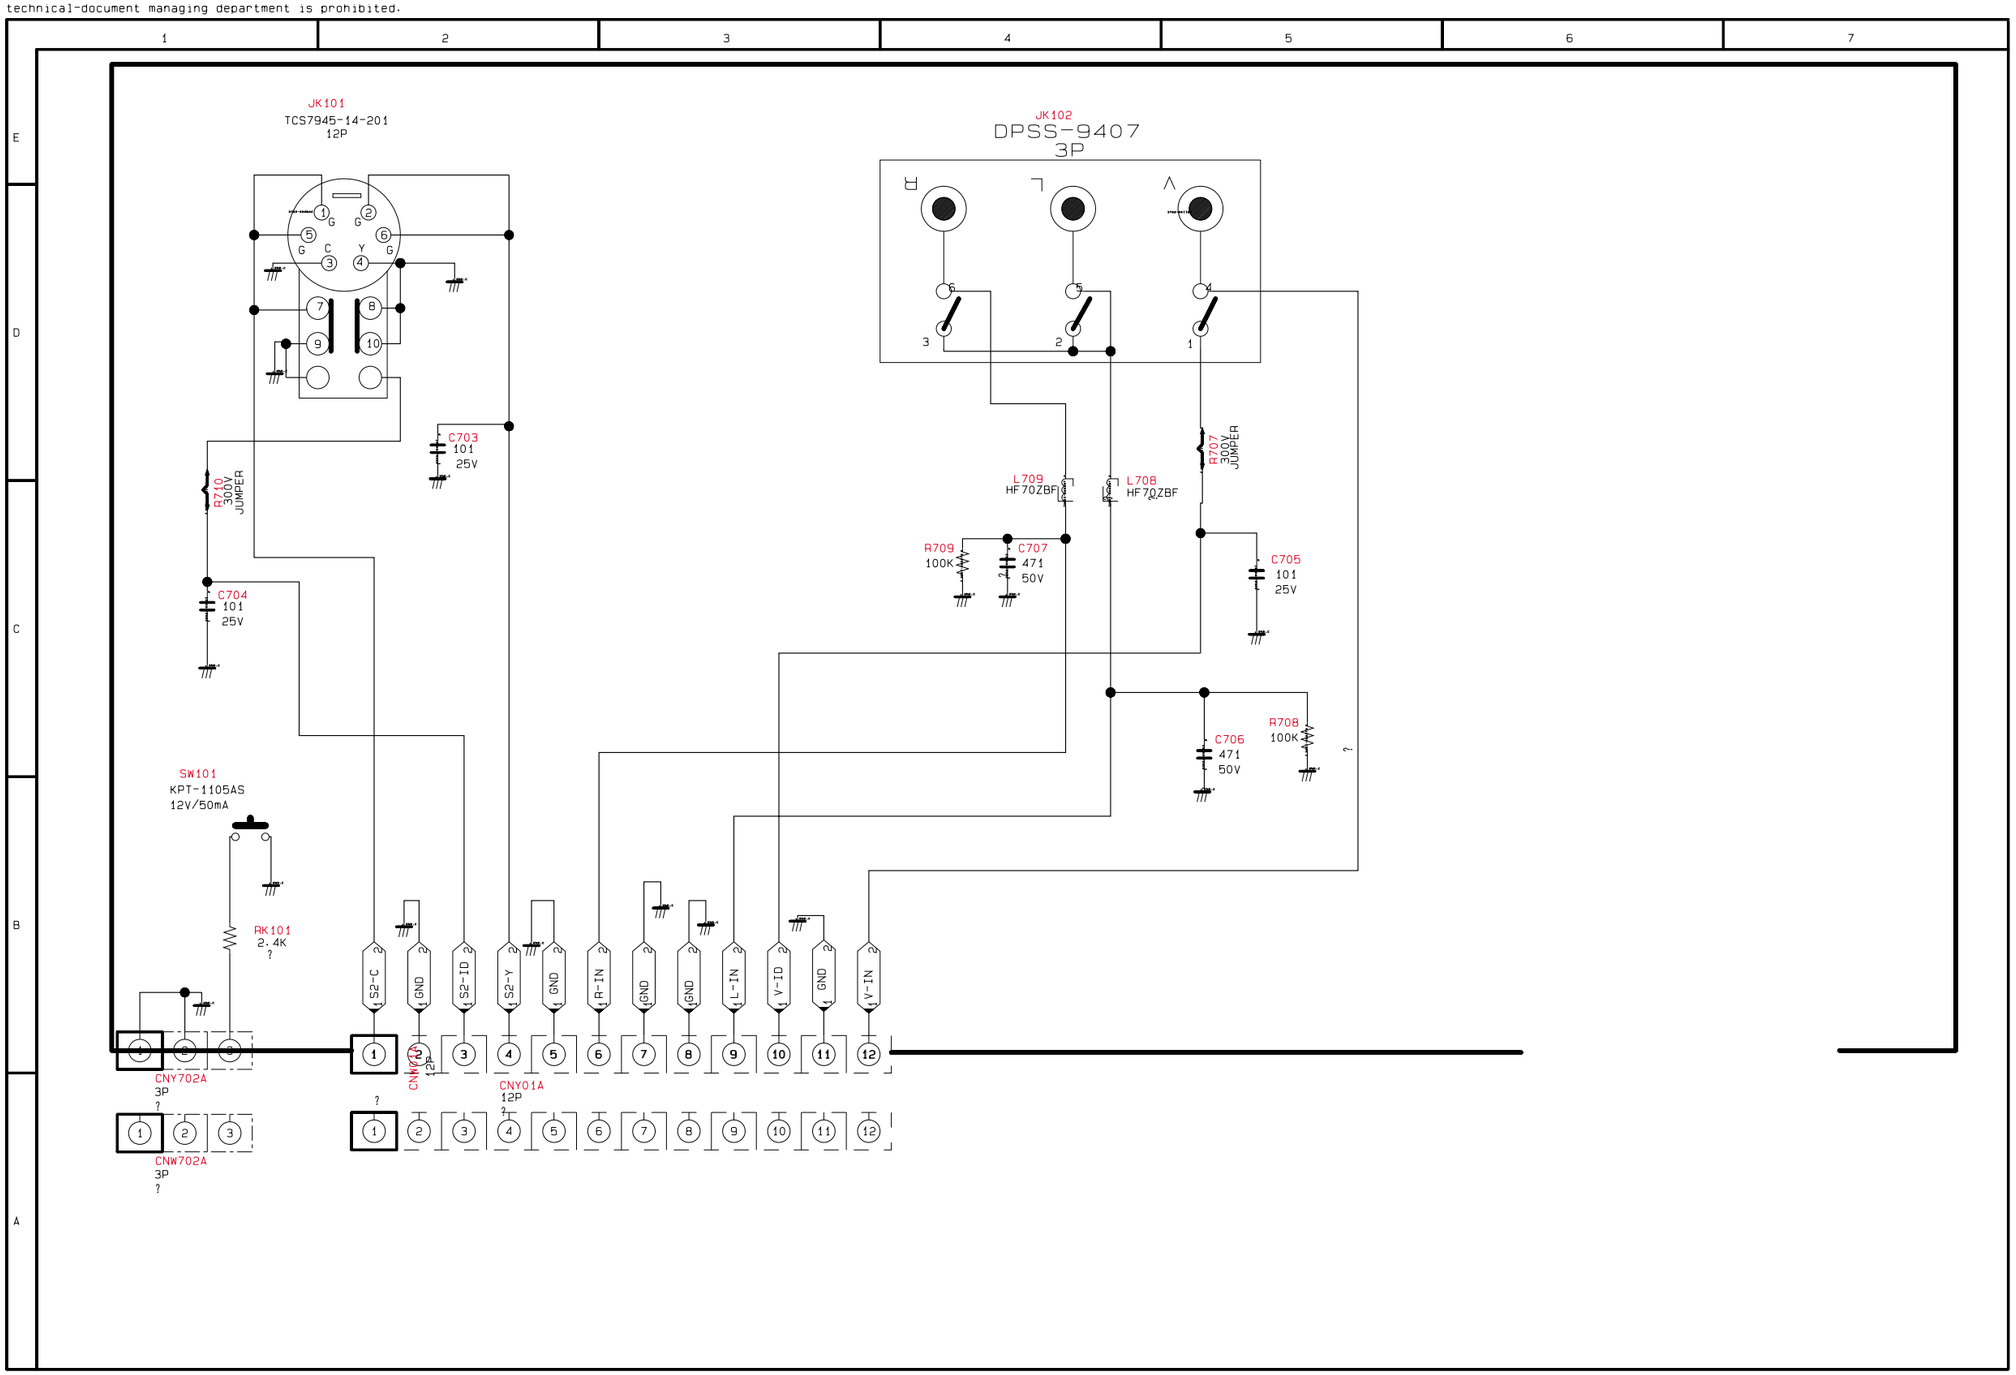

5-15 VM

This drawing is property of SEC
Use or copy of this drawing without proper permission from the appropriate
technical-document managing department is prohibited.

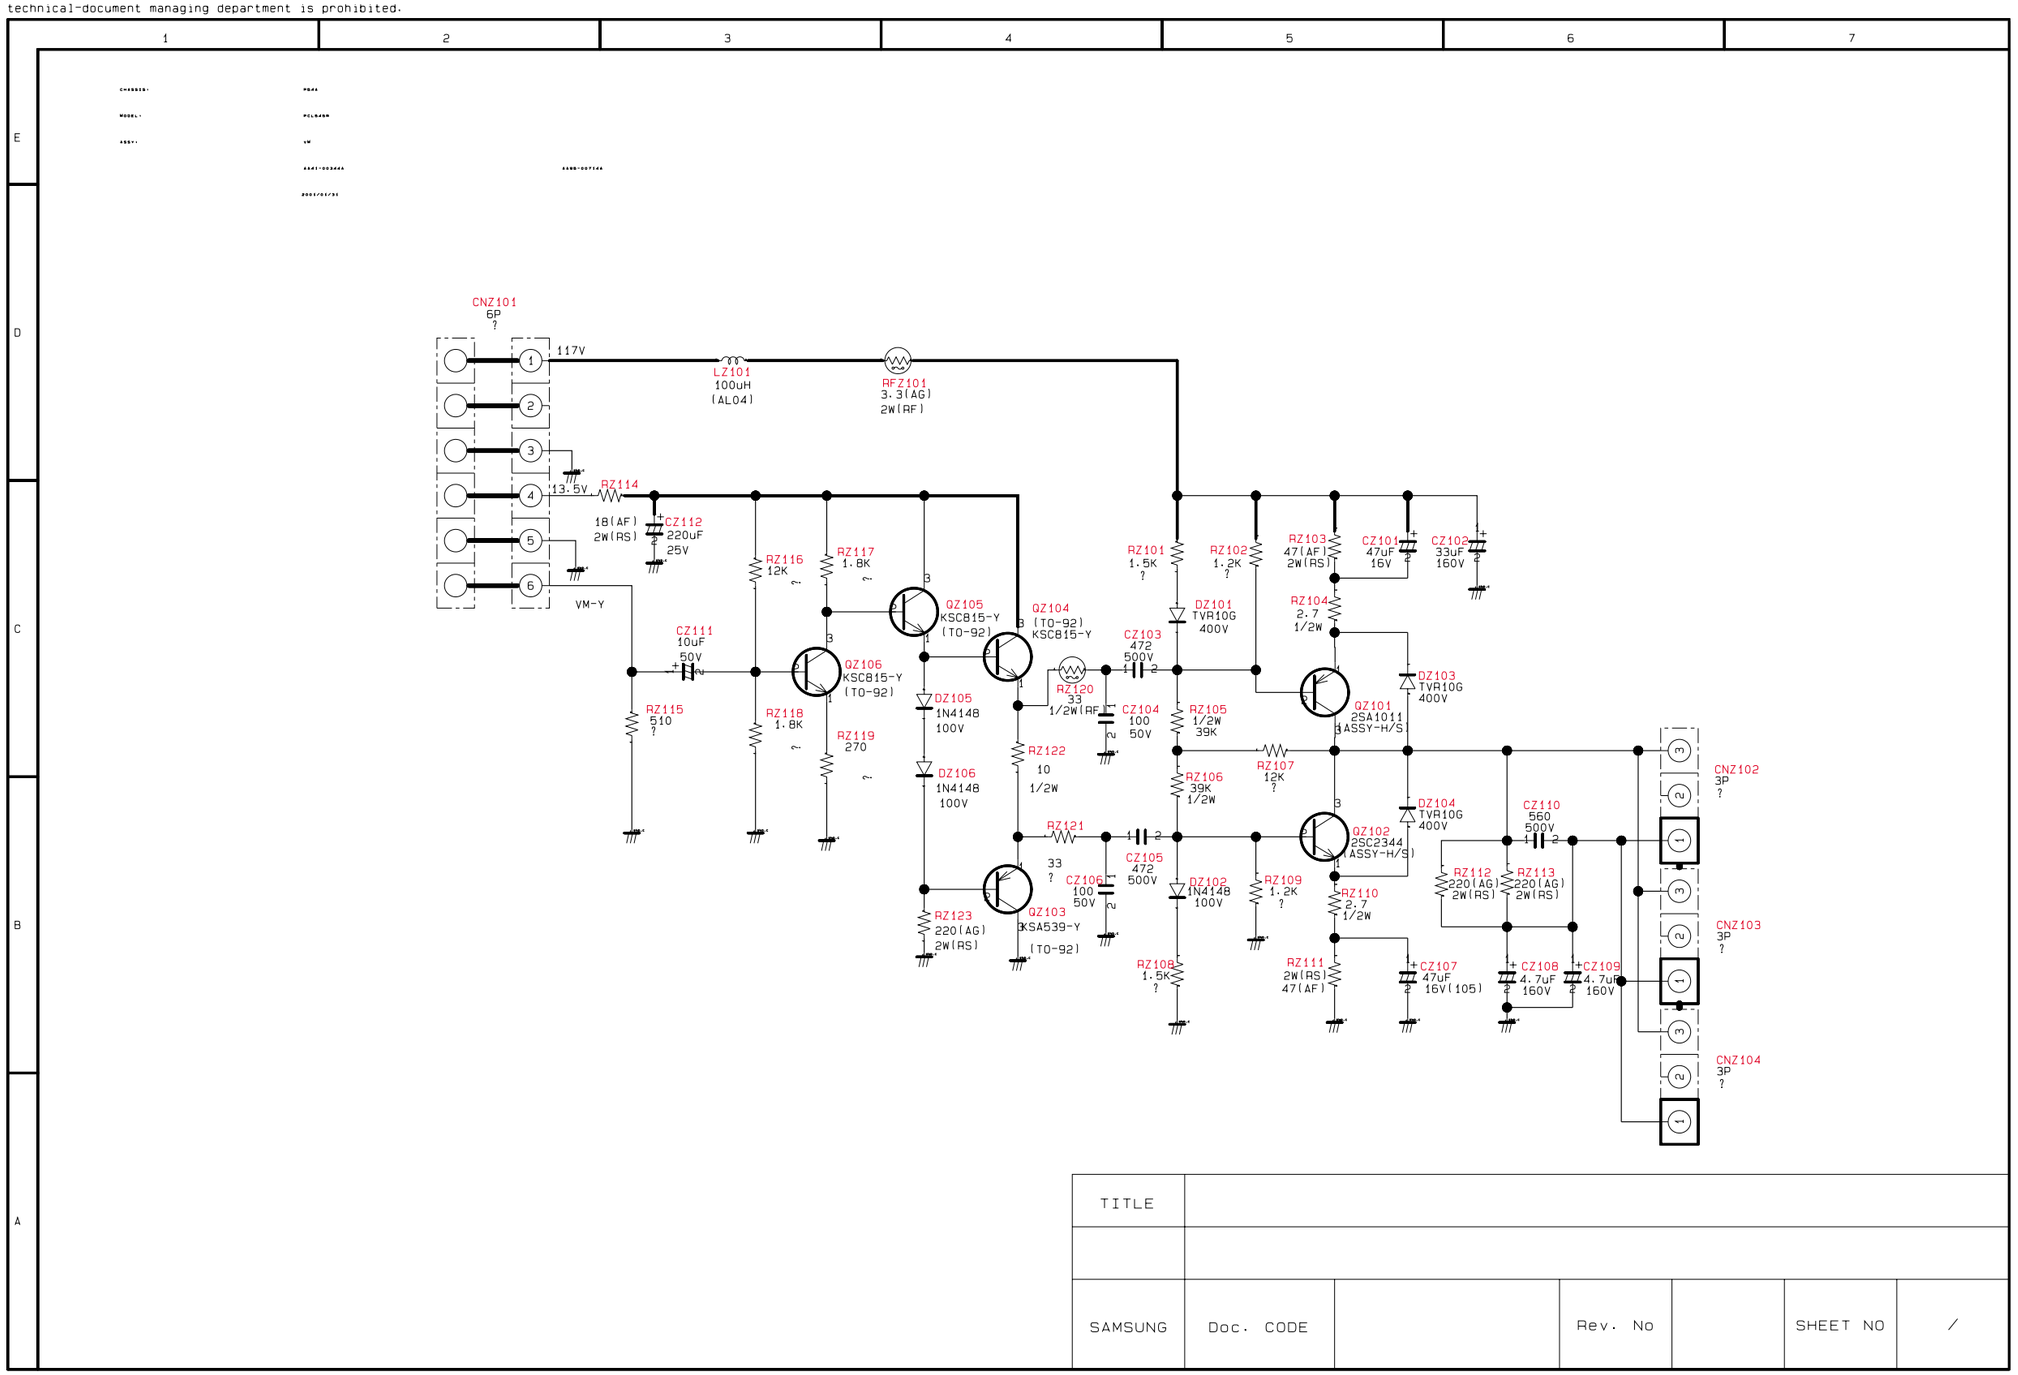

TITLE						
SAMSUNG	Doc. CODE		Rev. No		SHEET NO	/

5-16 CONTROL

This drawing is property of SEC
Use or copy of this drawing without proper permission from the appropriate
technical-document managing department is prohibited.

CHASSIS :W3
MODEL : P54A, P56A, J52A, J53A ALL MODEL
ASSY :PCB-CONTROL
PCB CODE :AA41-
2001/12/12

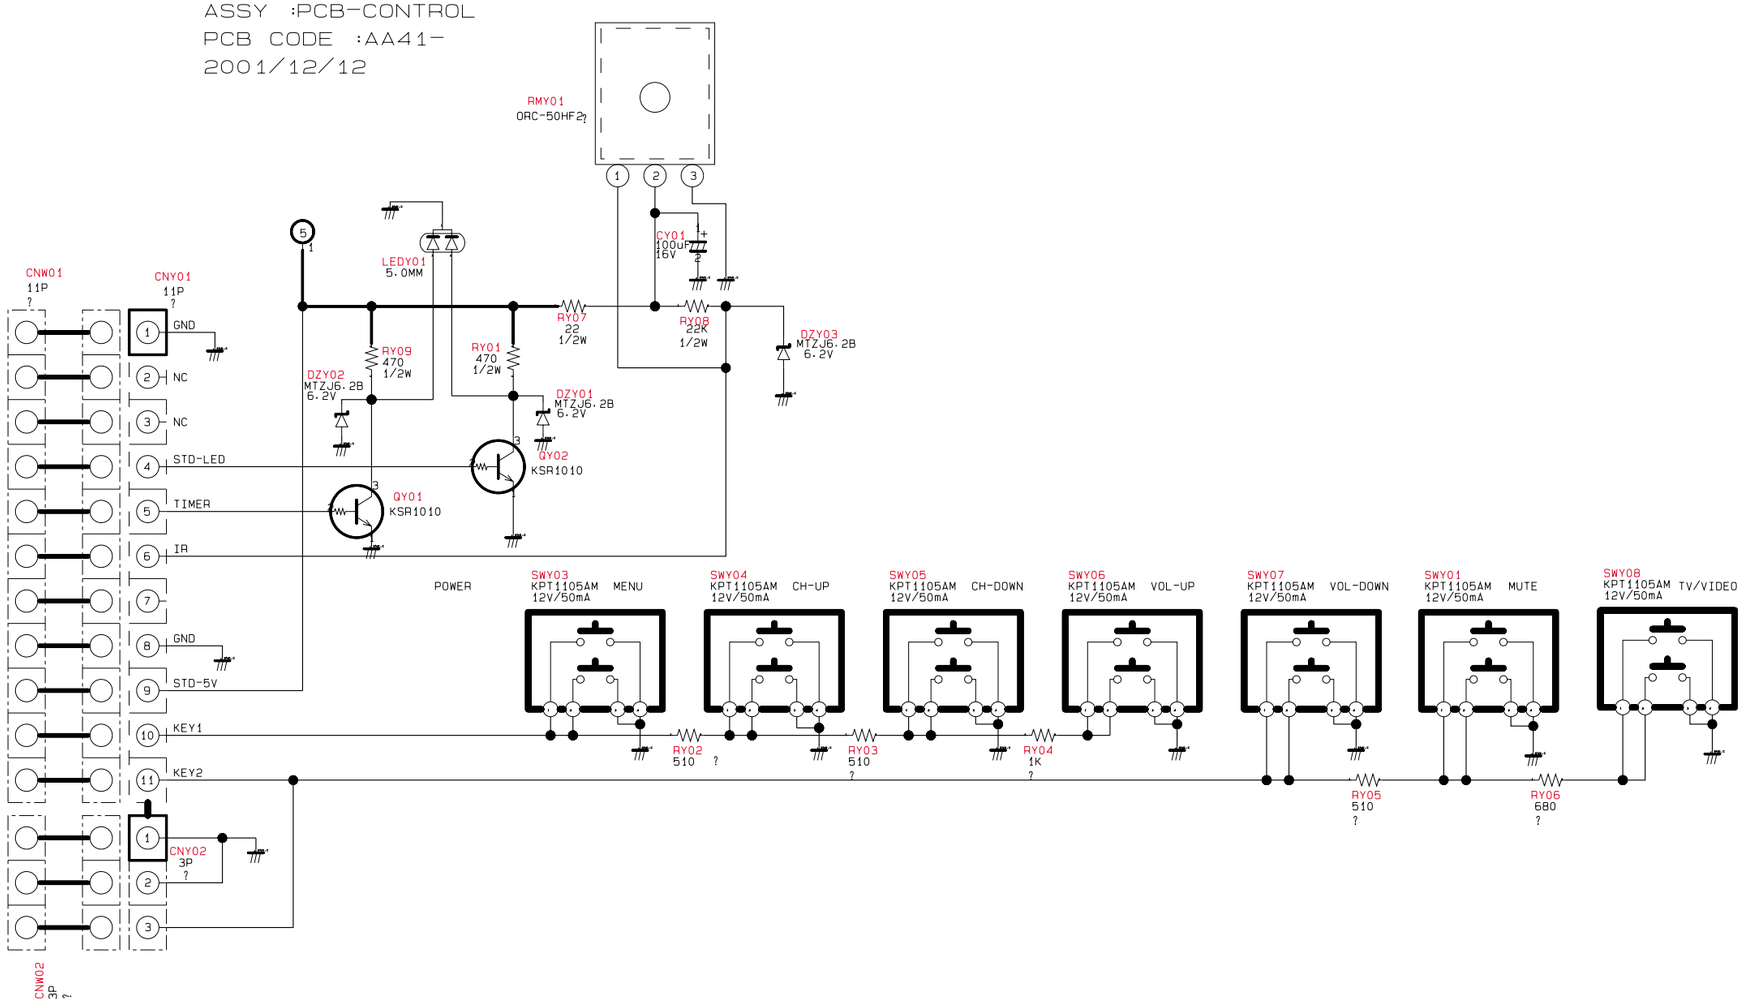

TITLE	P54A, P56A, J52A, J53A ALL MODEL					
SAMSUNG	Doc. CODE	Y. I. KAH	Rev. No		SHEET NO	/

5-17 DY JACK, SENSOR

DY JACK

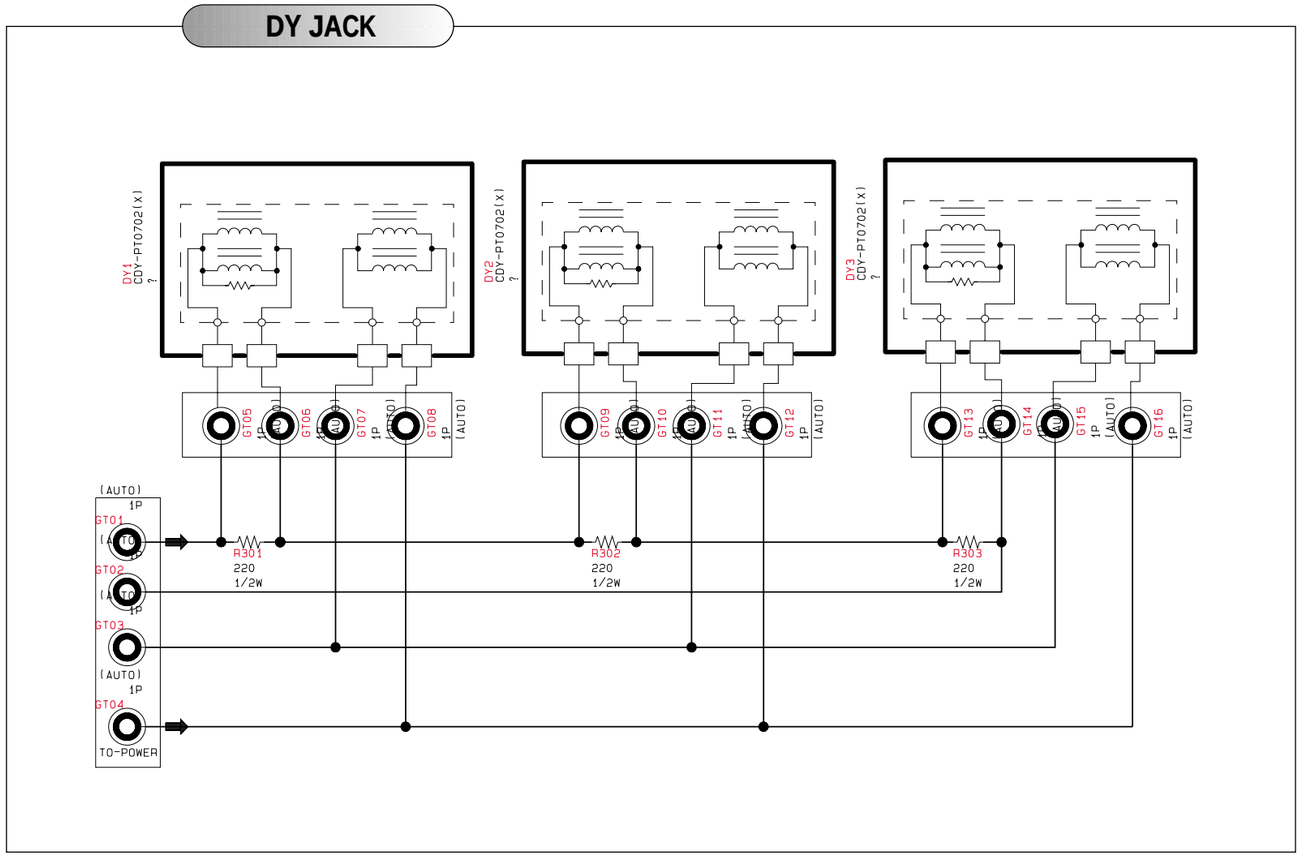

SENSOR

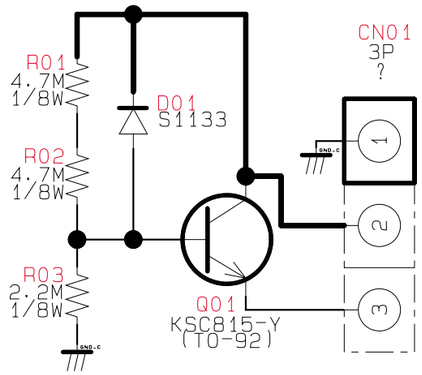

5-18 CG AMP

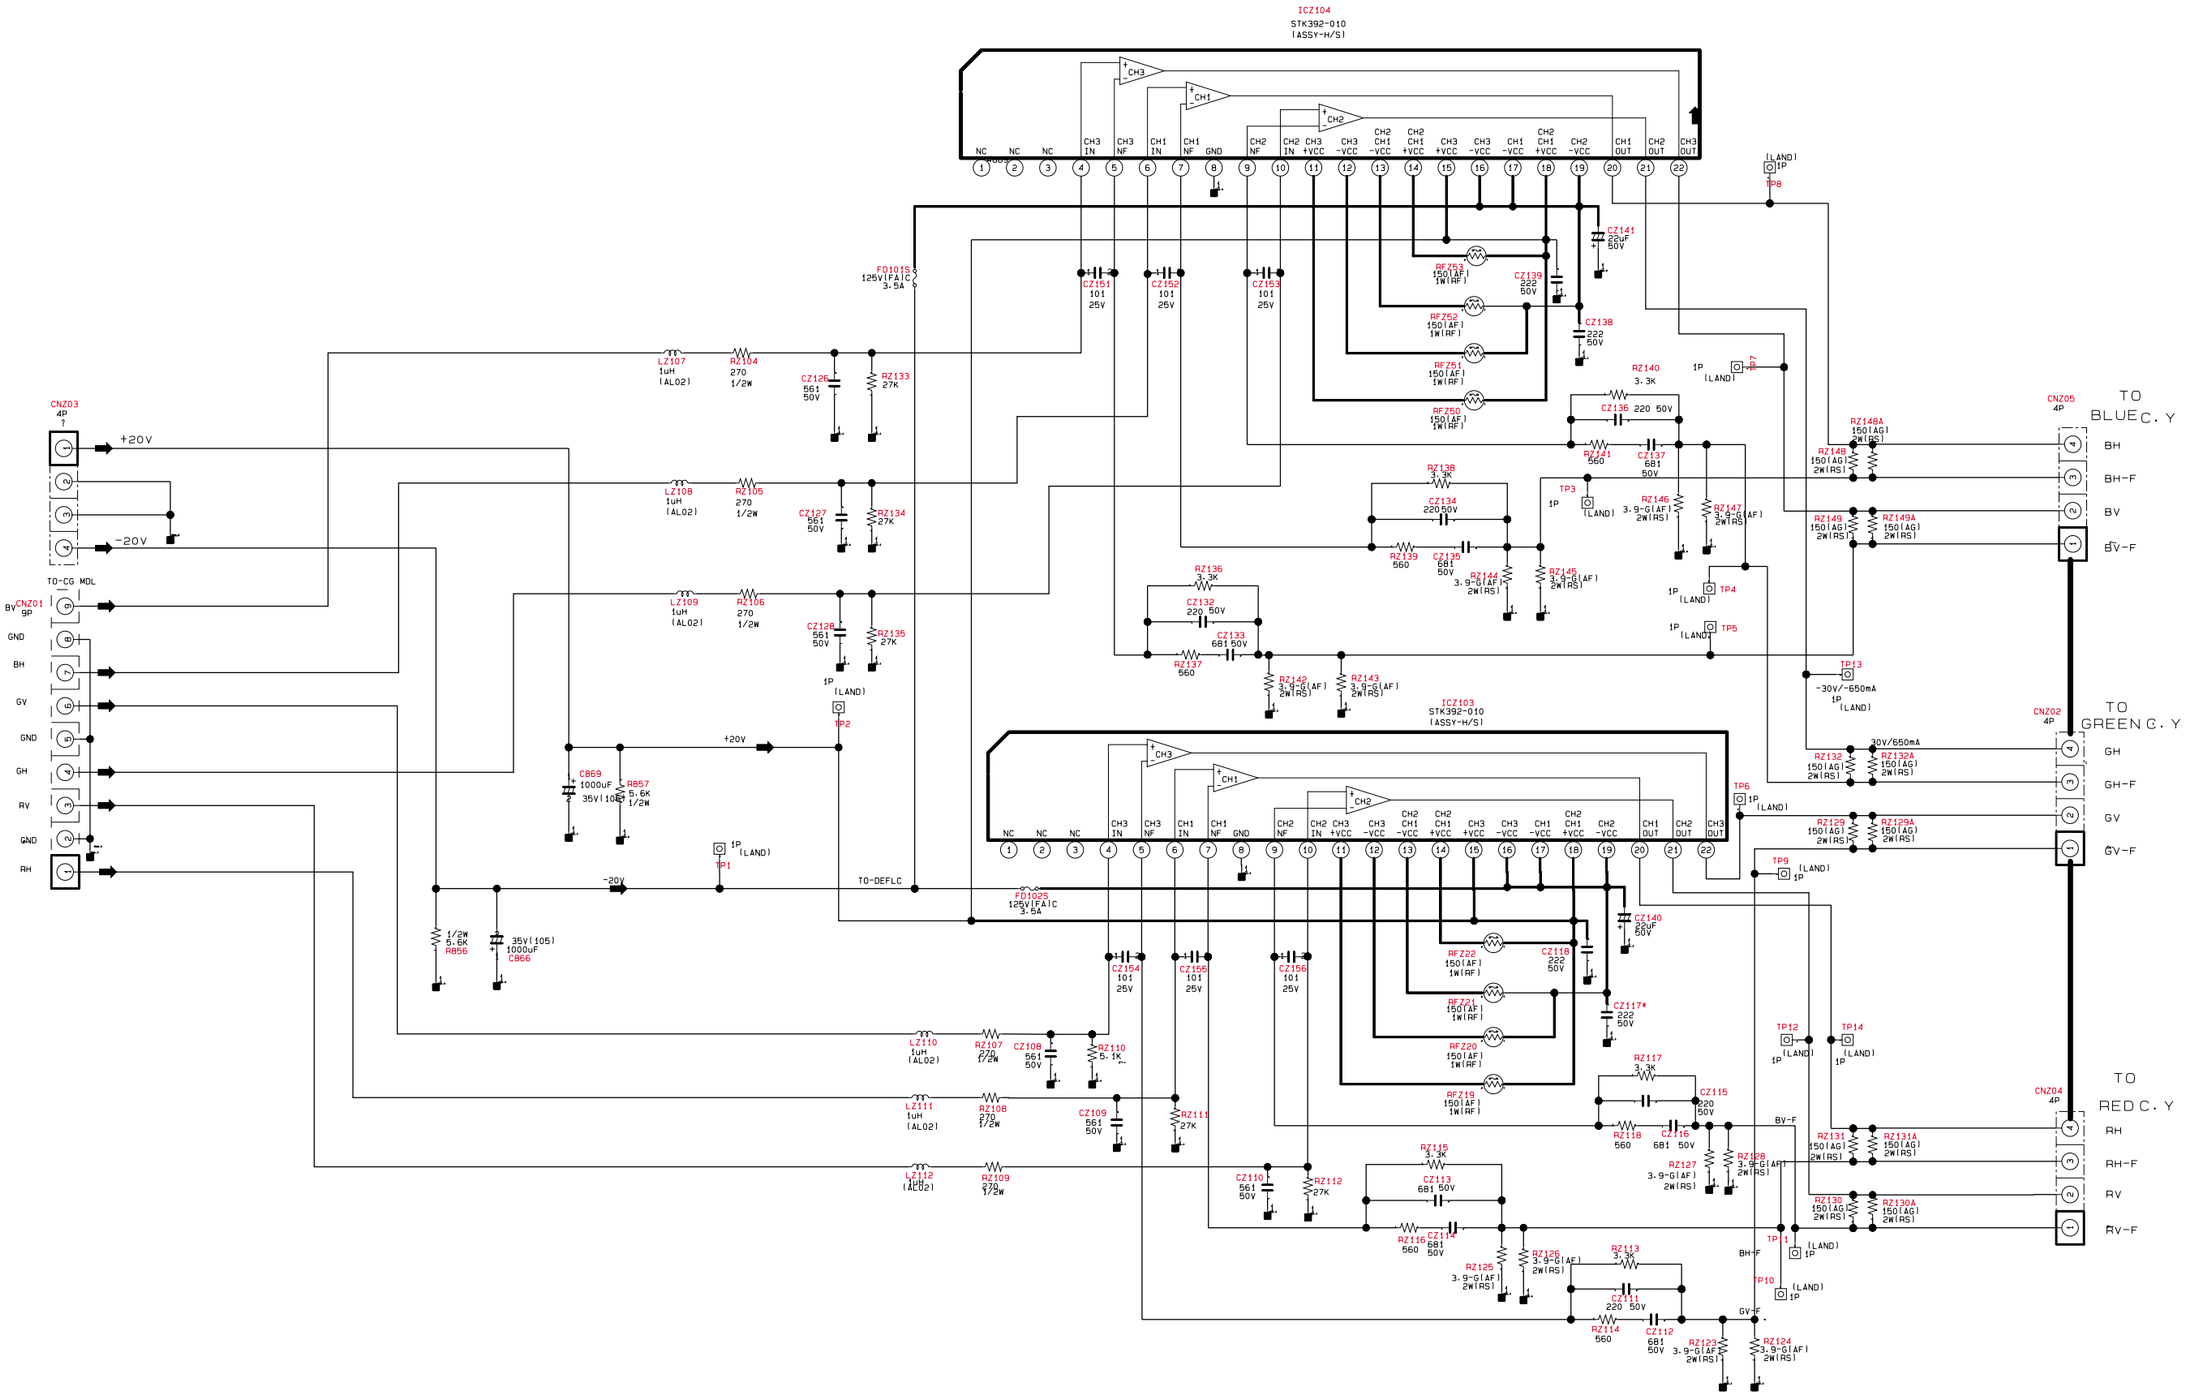
ICZ104
STK392-010
(ASSY-H/S)
CNZ03
4P
+20V
-20V
TO-CG MDL
CNZ01
9P
BV
GND
BH
GV
GND
GH
RV
GND
RH
FD101S
125V(FAIC
3.5A
LZ107
1uH
(AL02)
RZ104
270
1/2W
CZ126
561
50V
RZ133
27K
LZ108
1uH
(AL02)
RZ105
270
1/2W
CZ127
561
50V
RZ134
27K
LZ109
1uH
(AL02)
RZ106
270
1/2W
CZ128
561
50V
RZ135
27K
1P
(LAND)
TP2
+20V
CB69
1000uF
35V(105
RB57
5.6K
1/2W
1P
(LAND)
TP1
-20V
TO-DEFLC
1/2W
5.6K
RB56
35V(105)
1000uF
CB66
FD102S
125V(FAIC
3.5A
CZ151
101
25V
CZ152
101
25V
CZ153
101
25V
CZ154
101
25V
CZ155
101
25V
CZ156
101
25V
LZ110
1uH
(AL02)
RZ107
270
1/2W
CZ108
561
50V
RZ110
5.1K
LZ111
1uH
(AL02)
RZ108
270
1/2W
CZ109
561
50V
RZ111
27K
LZ112
1uH
(AL02)
RZ109
270
1/2W
CZ110
561
50V
RZ112
27K
RZ136
3.3K
CZ132
220 50V
CZ133
681 50V
RZ137
560
RZ142
3.9-G(AF)
2W(RS)
RZ143
3.9-G(AF)
2W(RS)
ICZ103
STK392-010
(ASSY-H/S)
RZ115
3.3K
CZ113
681 50V
RZ116
560
CZ114
681
50V
RZ125
3.9-G(AF)
2W(RS)
RZ126
3.9-G(AF)
2W(RS)
RZ113
3.3K
CZ111
220 50V
RZ114
560
CZ112
681
50V
RZ123
3.9-G(AF)
2W(RS)
RZ124
3.9-G(AF)
2W(RS)
NC NC NC CH3 IN CH3 NF CH1 IN CH1 NF GND CH2 NF CH2 IN CH3 +VCC CH3 -VCC CH2 CH1 -VCC CH2 CH1 +VCC CH3 +VCC CH3 -VCC CH1 -VCC CH2 CH1 +VCC CH2 -VCC CH1 OUT CH2 OUT CH3 OUT
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22
(LAND)
1P
TP8
CZ141
22uF
50V
RF753
150(AF)
1W(RF)
CZ139
222
50V
RF752
150(AF)
1W(RF)
CZ138
222
50V
RF751
150(AF)
1W(RF)
RF750
150(AF)
1W(RF)
RZ140
3.3K
CZ136 220 50V
RZ141
560
CZ137
681
50V
RZ138
3.3K
CZ134
220 50V
RZ139
560
CZ135
681
50V
RZ144
3.9-G(AF)
2W(RS)
RZ145
3.9-G(AF)
2W(RS)
TP3
1P
(LAND)
RZ146
3.9-G(AF)
2W(RS)
RZ147
3.9-G(AF)
2W(RS)
1P
(LAND)
TP4
1P
(LAND)
TP5
TP13
-30V/-650mA
1P
(LAND)
30V/650mA
RZ132
150(AG)
2W(RS)
RZ132A
150(AG)
2W(RS)
RZ129
150(AG)
2W(RS)
RZ129A
150(AG)
2W(RS)
TP6
1P
(LAND)
TP9
(LAND)
1P
CZ140
22uF
50V
RFZ22
150(AF)
1W(RF)
CZ118
222
50V
RFZ21
150(AF)
1W(RF)
CZ117*
222
50V
RFZ20
150(AF)
1W(RF)
RFZ19
150(AF)
1W(RF)
TP12
(LAND)
1P
TP14
(LAND)
1P
RZ117
3.3K
CZ115
220 50V
RZ118
560
CZ116
681 50V
RZ127
3.9-G(AF)
2W(RS)
RZ128
3.9-G(AF)
2W(RS)
BV-F
TP11
(LAND)
1P
BH-F
TP10
(LAND)
1P
GV-F
RZ131
150(AG)
2W(RS)
RZ131A
150(AG)
2W(RS)
RZ130
150(AG)
2W(RS)
RZ130A
150(AG)
2W(RS)
RZ148
150(AG)
2W(RS)
RZ148A
150(AG)
2W(RS)
RZ149
150(AG)
2W(RS)
RZ149A
150(AG)
2W(RS)
CNZ05
4P
TO
BLUE C.Y
BH
BH-F
BV
BV-F
CNZ02
4P
TO
GREEN C.Y
GH
GH-F
GV
GV-F
CNZ04
4P
TO
RED C.Y
RH
RH-F
RV
RV-F

5-19 SUB AMP

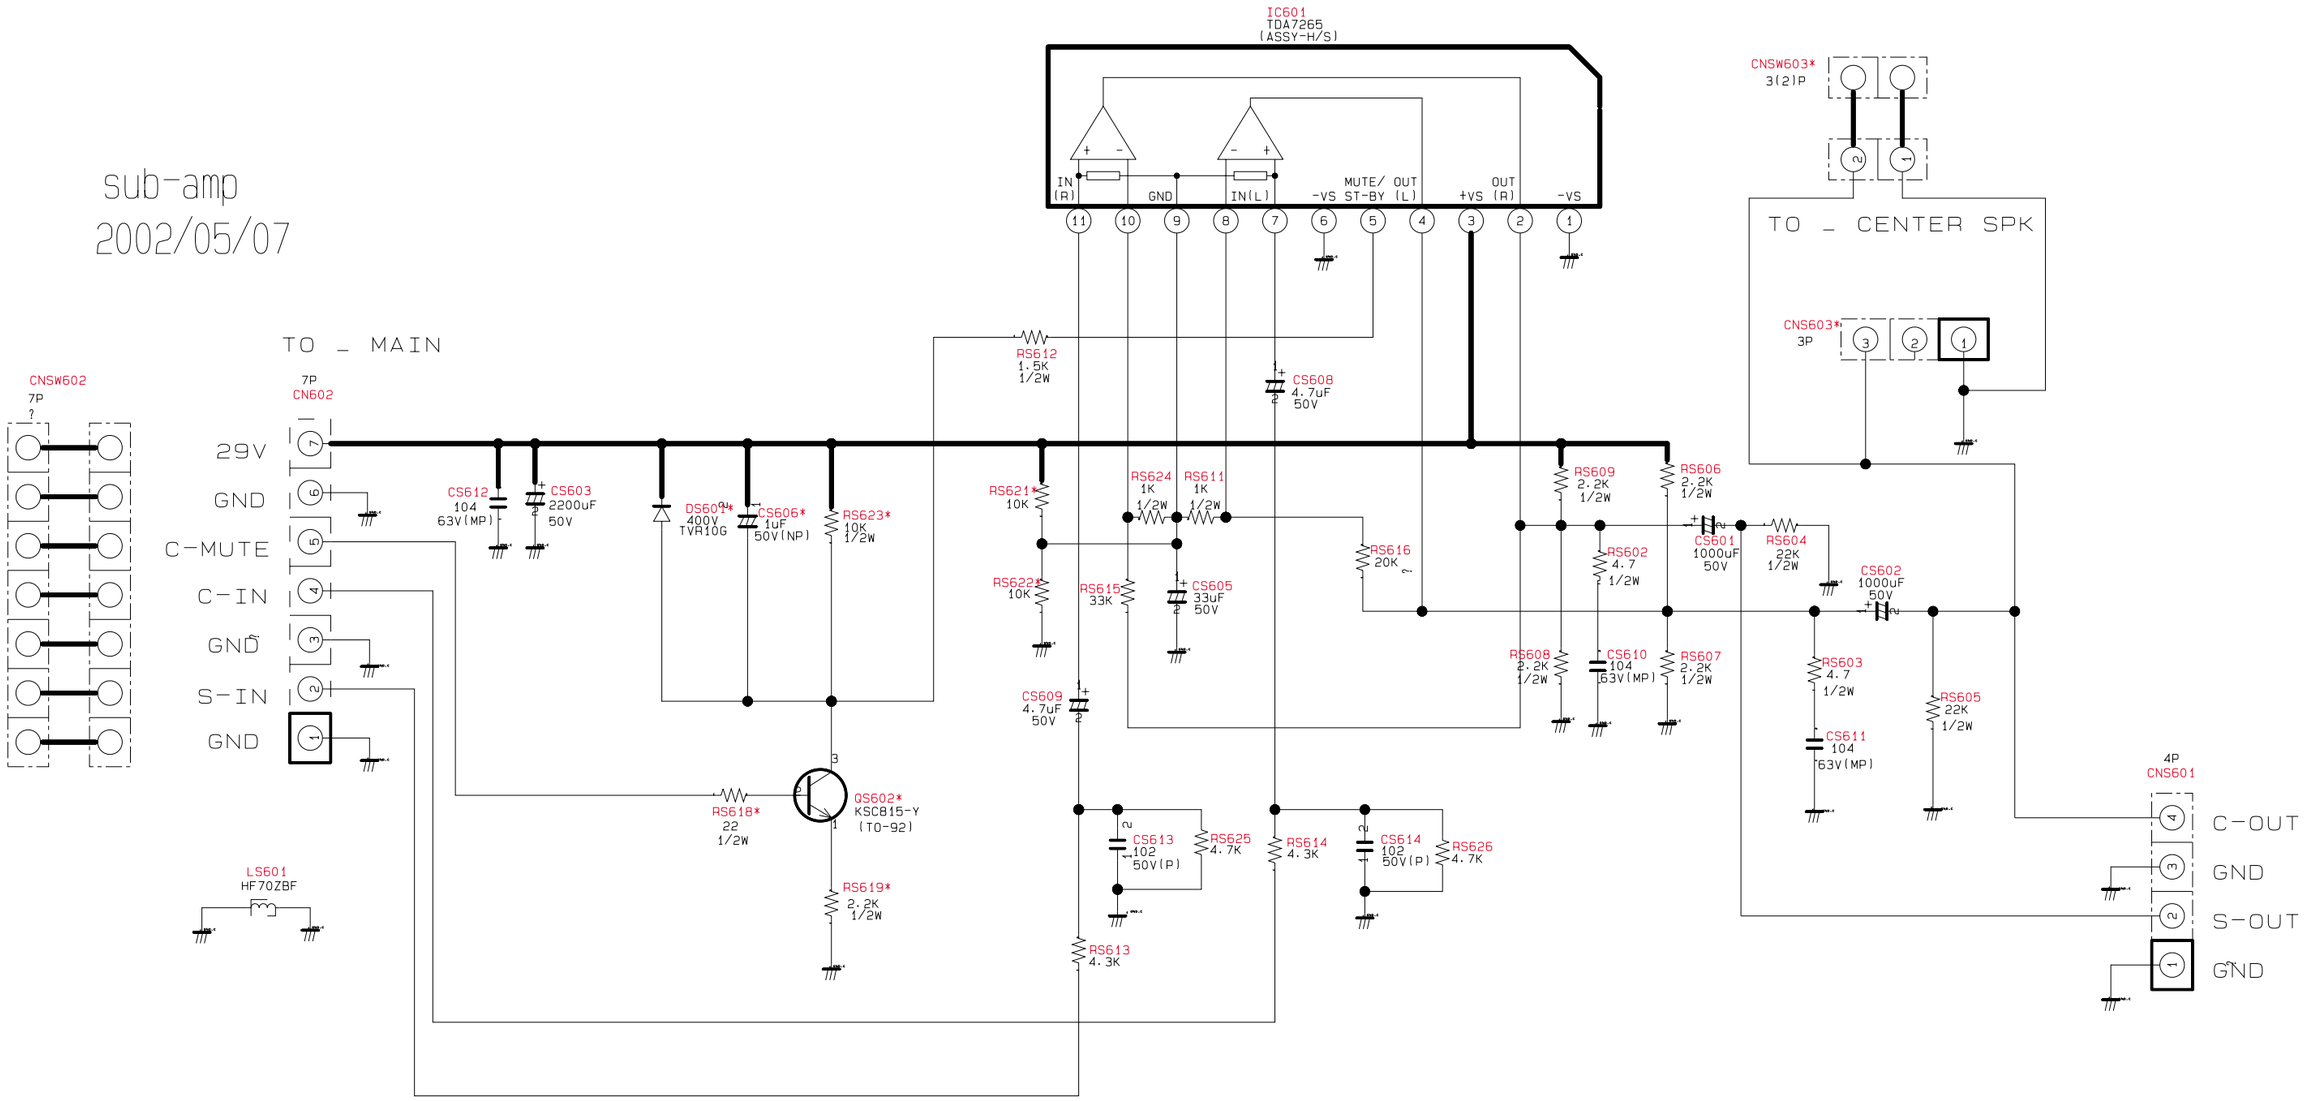
sub-amp
2002/05/07
TO _ MAIN
CNSW602
7P
CN602
29V
GND
C-MUTE
C-IN
GND
S-IN
GND
LS601
HF70ZBF
CS612
104
63V(MP)
CS603
2200uF
50V
DS601*
400V
TVR10G
CS606*
1uF
50V(NP)
RS623*
10K
1/2W
RS618*
22
1/2W
QS602*
KSC815-Y
(TO-92)
RS619*
2.2K
1/2W
IC601
TDA7265
(ASSY-H/S)
IN
(R)
GND
IN(L)
MUTE/ OUT
-VS ST-BY (L)
OUT
+VS (R)
-VS
RS612
1.5K
1/2W
CS608
4.7uF
50V
RS621*
10K
RS624
1K
1/2W
RS611
1K
1/2W
RS622*
10K
RS615
33K
CS605
33uF
50V
CS609
4.7uF
50V
RS616
20K
RS613
4.3K
CS613
102
50V(P)
RS625
4.7K
RS614
4.3K
CS614
102
50V(P)
RS626
4.7K
RS609
2.2K
1/2W
RS606
2.2K
1/2W
RS602
4.7
1/2W
CS601
1000uF
50V
RS604
22K
1/2W
CS602
1000uF
50V
RS608
2.2K
1/2W
CS610
104
63V(MP)
RS607
2.2K
1/2W
RS603
4.7
1/2W
CS611
104
63V(MP)
RS605
22K
1/2W
CNSW603*
3(2)P
TO _ CENTER SPK
CNS603*
3P
4P
CNS601
C-OUT
GND
S-OUT
GND